





Product designation			Monoblock potentiometers	
Product type designation			LPCPA	
General characteristics				
Resistance value			KO	500
Material			Polyamide - Resistive material: cermet	
IEC degree of protection			IP66, IP67; IP96K on front and IP20 on rear	
Electrical characteristics				
Rated insulation voltage Ui IEC/EN			V	250VAC
Rated impulse withstand voltage Uimp			kV	4
Max power			W	1
Mechanical features				
Mechanical travel			°	290
Weight			g	40
UL technical data				
UL degree of protection			1, 2, 3R, 4, 4X, 12, 12K on front	
Ambient conditions				
Temperature		Operating temperature		
		min	°C	-25
		max	°C	+70
Storage temperature				
		min	°C	-40
		max	°C	+85
Resistance & Protection				
Resistance tolerance			%	±10%
Dimensions				

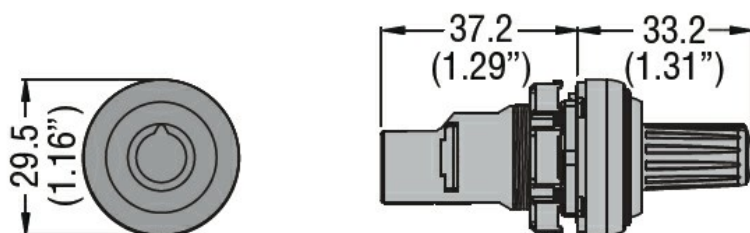

Wiring diagrams

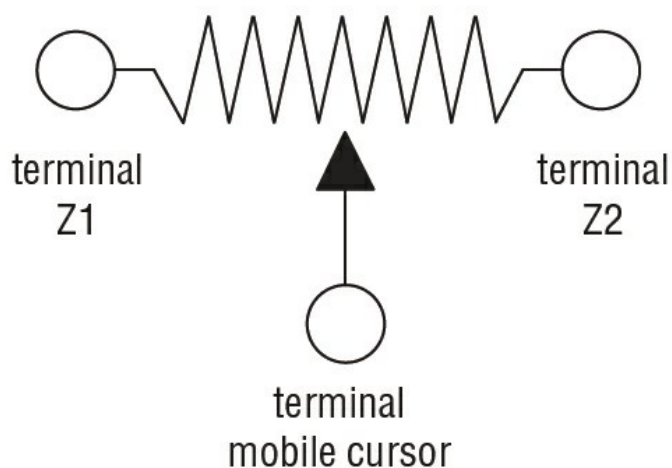

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1
UL508

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC001027 -
Potentiometer for
command
devices