
MECHANICAL RESET BUTTON, COMPLETE UNIT, SPRING RETURN Ø22MM PLATINUM SERIES CHROMED PLASTIC, FLUSH. ADJUSTABLE LENGTH 0...150MM/5.9IN, BLUE WITH "RESET" CAPTION



Product designation Product type designation			Mechanical reset buttons, complete unit, spring return LPCR11
General characteristics			
Colour			Blue (RESET)
Type of positions			Flush. Adjustable length 0150mm/5.9in
Material			Polyamide
IEC degree of protection			IP66, IP67 and IP69K
Mechanical features			
Operating force		kg-lb	<0.5Kg / 1.1lb
Mechanical life		cycles	5000000
Fixing			Without mounting adapter
Mounting adapter			LPXAU120
Weight		g	28
UL technical data			
UL degree of protection			Type1, 2, 3R, 4, 4X, 12, 12K
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-25
	max	°C	+70
Storage temperature			
	min	°C	-40
Disconsistant	max	°C	+85

Dimensions

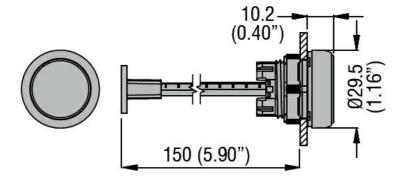

Certifications and compliance

Compliance

CSA C22.2 n° 14



ENERGY AND AUTOMATION

LPCR1196

MECHANICAL RESET BUTTON, COMPLETE UNIT, SPRING RETURN Ø22MM PLATINUM SERIES CHROMED PLASTIC, FLUSH. ADJUSTABLE LENGTH 0...150MM/5.9IN, BLUE WITH "RESET" CAPTION

IE	EC/EN/BS 60947-1
IE	EC/EN/BS 60947-5-1
U	IL508
C	CC
cl	ULus
E	AC

ETIM classification

ETIM 8.0

Certificates

EC000221 -Front element for push button