
## SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES CHROMED PLASTIC, 3 POSITION, 1 > 0 - 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 2



Product designation  Product type designation		Selector switch actuator key - 3 position LPCS38
General characteristics		
Colour		Black
Type of positions		1 > 0 - 2, key extraction in 2
Material		Polyamide
IEC degree of protection		IP66, IP67 and IP69K
Mechanical features		
Mechanical life	cycles	1000000
Mounting adapter		LPXAU120
Weight	g	60
UL technical data		
UL degree of protection		Type1, 2, 3R, 4, 4X, 12, 12K
Ambient conditions		
Temperature		
Operating temperature		
	min °C	-25
	max °C	+70
Storage temperature		
	min °C	-40
Dimonsions	max °C	+85

## **Dimensions**

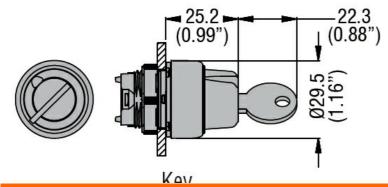

## Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1 **UL508** 

Certificates

CCC



## LPCS380R421E

SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES CHROMED PLASTIC, 3
POSITION, 1 > 0 - 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 2

cULus

ETIM classification

ETIM 8.0

EC000222 -Front element for selector switch