



Product designation

Selector switch  
actuator key - 3  
position  
LPFS33

Product type designation

#### General characteristics

|                          |                                   |
|--------------------------|-----------------------------------|
| Colour                   | Black                             |
| Type of positions        | 1 - 0 - 2, key<br>extraction in 0 |
| Material                 | Aluminium and<br>zinc alloy       |
| IEC degree of protection | IP66, IP67 and<br>IP69K           |

#### Mechanical features

|                  |                             |         |
|------------------|-----------------------------|---------|
| Mechanical life  | cycles                      | 1000000 |
| Fixing           | Without mounting<br>adapter |         |
| Mounting adapter | LPXAU120M                   |         |

#### UL technical data

|                         |                                 |
|-------------------------|---------------------------------|
| UL degree of protection | Type1, 2, 3R, 4,<br>4X, 12, 12K |
|-------------------------|---------------------------------|

#### Ambient conditions

Temperature


Operating temperature

|     |    |     |
|-----|----|-----|
| min | °C | -25 |
| max | °C | +70 |

Storage temperature

|     |    |     |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +85 |

#### Dimensions

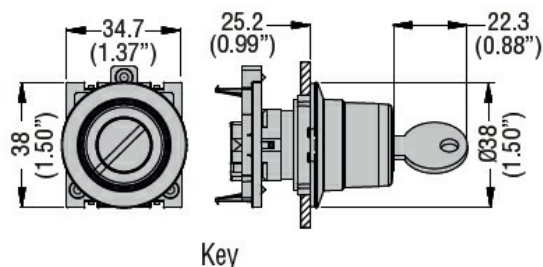

Key

#### Certifications and compliance

Compliance

CSA C22.2 n° 14  
IEC/EN/BS 60947-1  
IEC/EN/BS 60947-5-1  
UL508

Certificates

cULus

#### ETIM classification

ETIM 8.0

EC002611 -  
Control switch