




Product designation			Selector switch actuator key - 3 position	
Product type designation			LPFS33	
General characteristics				
Colour			Black	
Type of positions			1 - 0 - 2, key extraction in 1 and 0 and 2	
Material			Aluminium and zinc alloy for the metal part, polyamide for plastic parts	
IEC degree of protection			IP66, IP67 and IP69K	
Mechanical features				
Mechanical life		cycles	1000000	
Fixing			Without mounting adapter	
Mounting adapter			LPXAU120M	
UL technical data				
UL degree of protection			Type1, 2, 3R, 4, 4X, 12, 12K	
Ambient conditions				
Temperature				
Operating temperature		min	°C	-25
		max	°C	+70
Storage temperature		min	°C	-40
		max	°C	+85

Dimensions

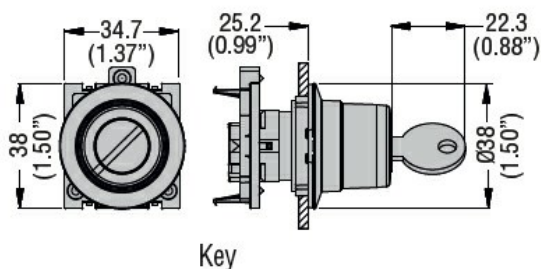

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1

UL508

Certificates

cULus

ETIM classification

ETIM 8.0

EC002611 -
Control switch