




Product designation				Selector switch actuator key - 3 position
Product type designation				LPFS33
General characteristics				
Colour				Black
Type of positions				1 - 0 - 2, key extraction in 1 and 0 and 2
Material				Aluminium and zinc alloy for the metal part, polyamide for plastic parts
IEC degree of protection				IP66, IP67 and IP69K
Mechanical features				
Mechanical life			cycles	1000000
Fixing				Without mounting adapter
Mounting adapter				LPXAU120M
UL technical data				
UL degree of protection				Type1, 2, 3R, 4, 4X, 12, 12K
Ambient conditions				
Temperature				
Operating temperature		min	°C	-25
		max	°C	+70
Storage temperature		min	°C	-40
		max	°C	+85

Dimensions

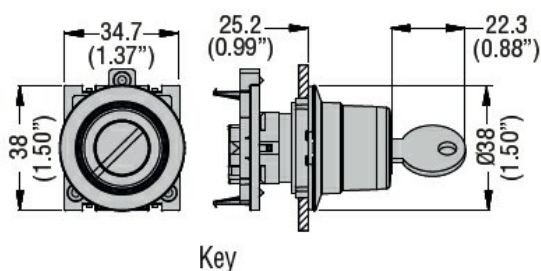

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1

UL508

Certificates

cULus

ETIM classification

ETIM 8.0

EC002611 -
Control switch