




|                          |  |     |        |                                                                          |  |
|--------------------------|--|-----|--------|--------------------------------------------------------------------------|--|
| Product designation      |  |     |        | Selector switch actuator key - 3 position                                |  |
| Product type designation |  |     |        | LPFS33                                                                   |  |
| General characteristics  |  |     |        |                                                                          |  |
| Colour                   |  |     |        | Black                                                                    |  |
| Type of positions        |  |     |        | 1 - 0 - 2, key extraction in 1 and 0 and 2                               |  |
| Material                 |  |     |        | Aluminium and zinc alloy for the metal part, polyamide for plastic parts |  |
| IEC degree of protection |  |     |        | IP66, IP67 and IP69K                                                     |  |
| Mechanical features      |  |     |        |                                                                          |  |
| Mechanical life          |  |     | cycles | 1000000                                                                  |  |
| Fixing                   |  |     |        | Without mounting adapter                                                 |  |
| Mounting adapter         |  |     |        | LPXAU120M                                                                |  |
| UL technical data        |  |     |        |                                                                          |  |
| UL degree of protection  |  |     |        | Type1, 2, 3R, 4, 4X, 12, 12K                                             |  |
| Ambient conditions       |  |     |        |                                                                          |  |
| Temperature              |  |     |        |                                                                          |  |
| Operating temperature    |  | min | °C     | -25                                                                      |  |
|                          |  | max | °C     | +70                                                                      |  |
| Storage temperature      |  | min | °C     | -40                                                                      |  |
|                          |  | max | °C     | +85                                                                      |  |

## Dimensions

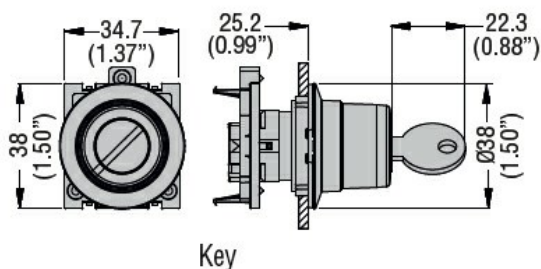

## Certifications and compliance

### Compliance

CSA C22.2 n° 14  
IEC/EN/BS 60947-1  
IEC/EN/BS 60947-5-1

---

UL508

---

Certificates

cULus

ETIM classification

ETIM 8.0

EC002611 -  
Control switch