



Product designation

Product type designation

General characteristics

Colour

LED integrated
monoblock pilot
lights steady light
LPML

Material

Polyamide

IEC degree of protection

IP66, IP67 and
IP69K on front;
IP20 on rear

Electrical characteristics

Rated frequency

Hz 50-60

Supply voltage (AC)

V 12 (-15% ...
+10% Ue)

Supply voltage (DC)

V 12 (-15% ...
+10% Ue)

Operations

Electrical life

hours >30000

Mechanical features

Tightening torque for terminals max

Nm 0.8

Terminals screw

Screw
termination

Conductor section

AWG/kcmil conductor section

| | min | 18 |
|--|-----|----|
| | max | 16 |

IEC

| | max | mm ² | 2.5 |
|--|-----|-----------------|-----|
|--|-----|-----------------|-----|

Fixing

Ring fixing
Ø22mm

Weight

g 21

UL technical data

UL degree of protection

Type1, 2, 3R, 4,
4X, 12, 12K on
front


Ambient conditions

Temperature


Operating temperature

| min | °C | -25 |
|-----|----|-----|
| max | °C | +70 |

Dimensions

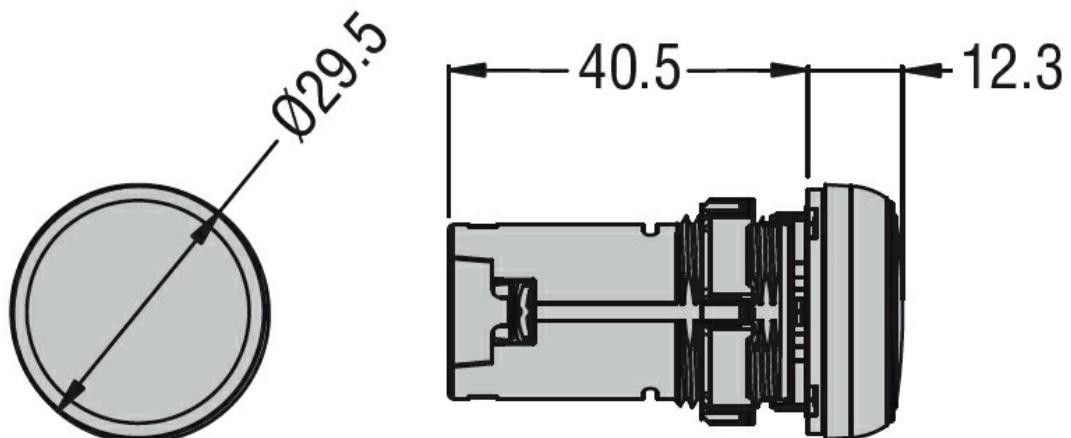

Wiring diagrams

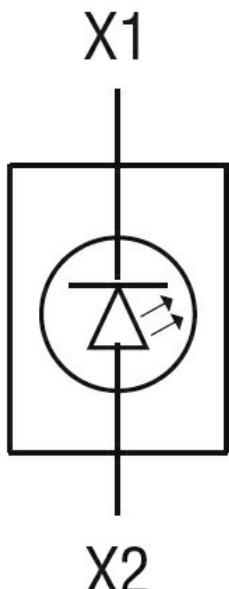

Certifications and compliance

Compliance

[CSA C22.2 n° 14](#)

[IEC/EN/BS 60947-1](#)

[IEC/EN/BS 60947-5-1](#)

[UL508](#)

Certificates

[cULus](#)

[EAC](#)

ETIM classification

ETIM 8.0

EC000272 -
Indicator light
complete