



Product designation

LED integrated
monoblock pilot
lights steady light
LPML

Product type designation

General characteristics

Colour

Transparent

Material

Polyamide

IEC degree of protection

IP66, IP67 and
IP69K on front;
IP20 on rear

Electrical characteristics

Rated frequency

Hz 50-60

Supply voltage (DC)

V 220 (-15% ...
+10% Ue)

Operations

Electrical life

hours >30000

Mechanical features

Tightening torque for terminals max

Nm 0.8

Conductor section

AWG/kcmil conductor section

min	18
max	16

IEC

min	mm ²	0.5
max	mm ²	2.5

Weight

g 24

UL technical data

UL degree of protection

Type 1, 2, 3R, 4,
4X, 12, 12K on
front


Ambient conditions

Temperature


Operating temperature

min	°C	-25
max	°C	+70

Dimensions

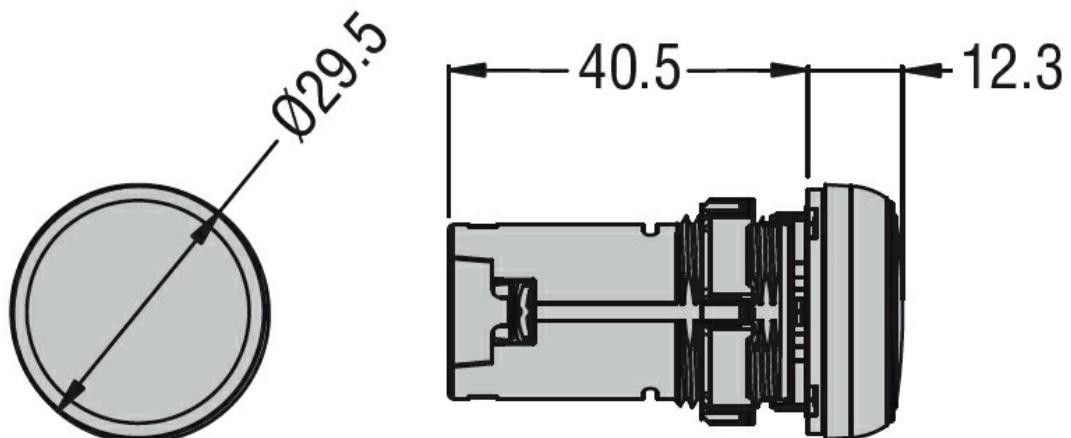

Wiring diagrams

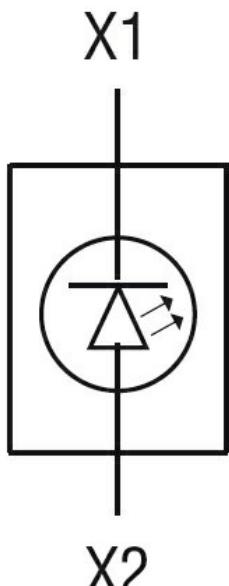

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC000272 -
Indicator light
complete