


Product designation	Joystick				
Product type designation	LPSJ				
General characteristics					
Type of positions	2 stable				
Material	Aluminium and zinc alloy for metal parts and polyamide for plastic parts. Sealing boot is NBR rubber				
IEC degree of protection	IP66, IP67 and IP69K				
Electrical characteristics					
Rated insulation voltage Ui IEC/EN	V	690			
IEC Conventional free air thermal current Ith	A	10			
UL/CSA and IEC/EN 60947-5-1 designation	A300 Q300				
Operating current AC15	12V	A	6		
	24V	A	6		
	48V	A	6		
	120V	A	6		
	240V	A	3		
Operating current DC13	12V	A	0.55		
	24V	A	0.55		
	48V	A	0.55		
	125V	A	0.55		
	250V	A	0.27		
Contact resistance	mΩ	≤20			
Mechanical features					
Mechanical life	cycles	1000000			
Tightening torque for terminals max	Nm	1			
Terminals screw	Clamp screw with washer				
Mounting adapter	Included with contacts				
UL technical data					
UL degree of protection	Type 1, 2, 3R, 4, 4X, 12, 12K				
Ambient conditions					
Temperature					
Operating temperature	min	°C	-25		
	max	°C	+60		
Storage temperature	min	°C	-40		
	max	°C	+70		
Dimensions					

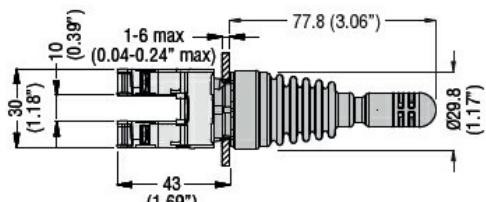

2 positions

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

cULus

ETIM classification

ETIM 8.0

EC000632 -
Control switch,
Joystick