


Product designation			Joystick	
Product type designation			LPSJ	
General characteristics				
Type of positions			4 instable	
Material			Aluminium and zinc alloy for metal parts and polyamide for plastic parts. Sealing boot is NBR rubber	
IEC degree of protection			IP66, IP67 and IP69K	
Electrical characteristics				
Rated insulation voltage Ui IEC/EN		V	690	
IEC Conventional free air thermal current Ith		A	10	
UL/CSA and IEC/EN 60947-5-1 designation		A300 Q300		
Operating current AC15		12V	A	6
		24V	A	6
		48V	A	6
		120V	A	6
		240V	A	3
Operating current DC13		12V	A	0.55
		24V	A	0.55
		48V	A	0.55
		125V	A	0.55
		250V	A	0.27
Contact resistance		mO	≤20	
Mechanical features				
Mechanical life		cycles	1000000	
Tightening torque for terminals max		Nm	1	
Terminals screw			Clamp screw with washer	
Mounting adapter			Included with contacts	
UL technical data				
UL degree of protection			Type 1, 2, 3R, 4, 4X, 12, 12K	
Ambient conditions				
Temperature		Operating temperature		
		min	°C	-25
		max	°C	+60
Storage temperature		min	°C	-40
		max	°C	+70
Dimensions				

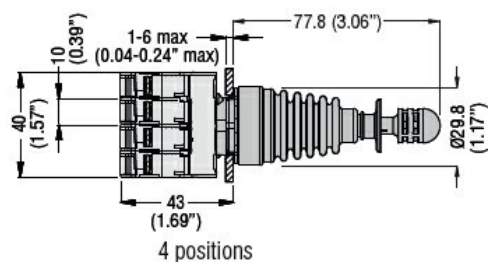

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

cULus

ETIM classification

ETIM 8.0

EC000632 -
Control switch,
Joystick