



Product designation

Mechanical reset buttons, complete unit, spring return
LPSR10

Product type designation

General characteristics

Colour

Red
Aluminium and zinc alloy for metal parts and polyamide for plastic parts

Material

IEC degree of protection

IP66, IP67 and IP69K

Mechanical features

Fixing

Without mounting adapter

Mounting adapter

LPXAU120M

UL technical data

UL degree of protection

Type1, 2, 3R, 4, 4X, 12, 12K

Ambient conditions

Temperature


Operating temperature

	min °C	-25
	max °C	+70

Storage temperature

	min °C	-40
	max °C	+85

Dimensions

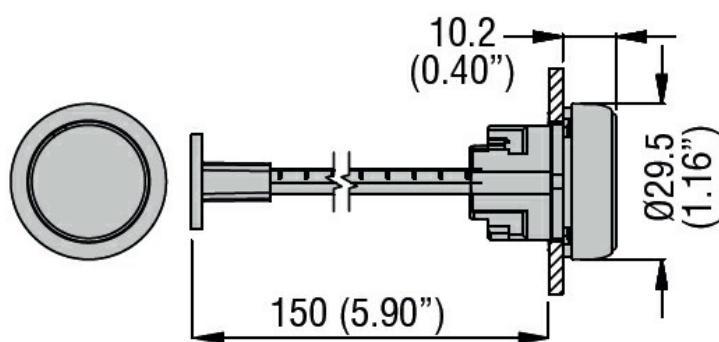

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

cULus

ETIM classification

ETIM 8.0

EC000029 -
Push-switch
button