



Contact elements  
- with mountin  
adapter  
LPXE

## Product designation

## Product type designation

### Operations

Electrical life	hours	1000000
-----------------	-------	---------

### Mechanical features

Operating force	kg-lb	≤0.5Kg/1.1lb
-----------------	-------	--------------

Tightening torque for terminals max	Nm	1
-------------------------------------	----	---

Terminals screw	Screw
-----------------	-------

## Conductor section

AWG/kcmil conductor section

max 14

IEC

max mm<sup>2</sup> 1 or 2 / 2.5

Mounting adapter	LPXAU120
------------------	----------

Weight	g	29
--------	---	----

### Ambient conditions

## Temperature

Operating temperature

min °C -25


max °C +70

Storage temperature

min °C -40

max °C +85

### Wiring diagrams

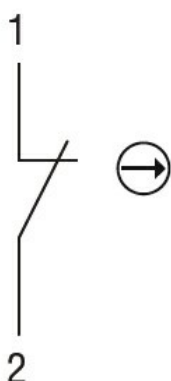

### Certifications and compliance

## Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

## Certificates

CCC

cULus

EAC

RINA

UL

ETIM classification

ETIM 8.0

EC002498 -  
Accessories/spare  
parts for low-  
voltage switch  
technology