




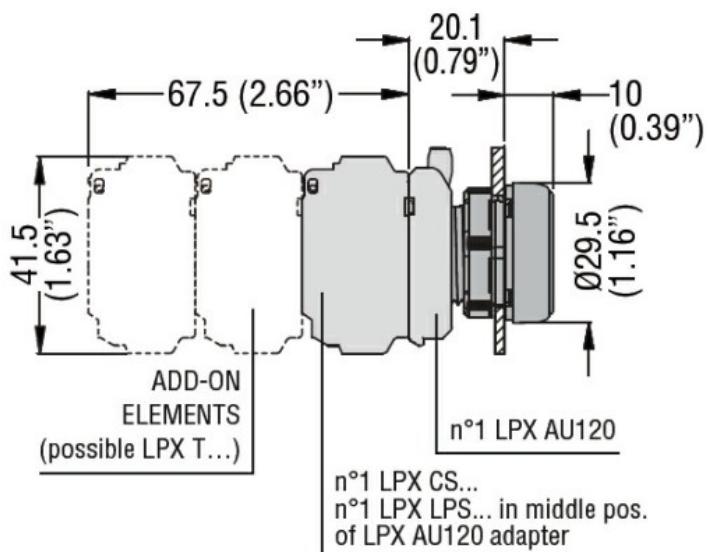

Product designation	LED elements steady light				
Product type designation	LPXLE				
General characteristics					
Colour	Blue				
Electrical characteristics					
Supply voltage (AC)	V	185...265			
Supply voltage (DC)	V	185...265			
Operations					
Electrical life	hours	100000			
Mechanical features					
Tightening torque for terminals max	Nm	1			
Conductor section					
AWG/kcmil conductor section	max	12			
IEC	max	mm <sup>2</sup>	1 or 2 / 2.5		
Mounting adapter	LPXAU120				
Weight	g	16			
Ambient conditions					
Temperature					
Operating temperature	min	°C	-25		
	max	°C	+60		
Storage temperature	min	°C	-40		
	max	°C	+85		
Dimensions					

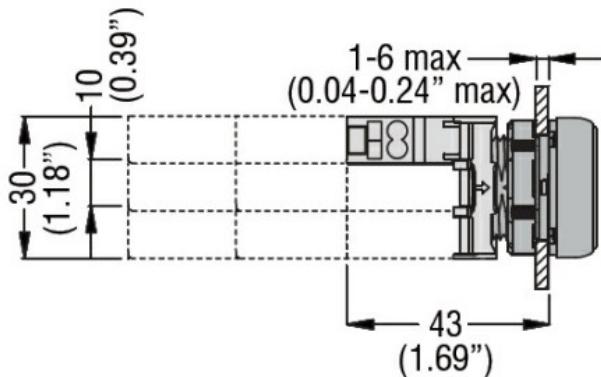

### Wiring diagrams

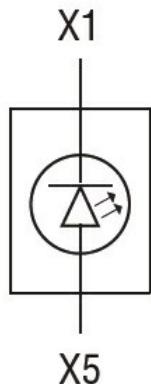

### Certifications and compliance

#### Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

#### Certificates

CCC

cULus

EAC

RINA

UL

### ETIM classification

#### ETIM 8.0

EC000204 -  
Lamp holder  
block for control  
circuit devices