



Product designation

LED elements  
steady light  
LPXLF

Product type designation

### General characteristics

Colour Blue

### Electrical characteristics

Supply voltage (AC) V 85...140

### Operations

Electrical life hours 100000

### Mechanical features

Tightening torque for terminals max Nm 1

Conductor section

AWG/kcmil conductor section

max 12

IEC

max mm<sup>2</sup> 1 or 2 / 2.5

Mounting adapter

LPXAU120

Weight

g 16

### Ambient conditions

Temperature


Operating temperature

min °C -25  
max °C +70


Storage temperature

min °C -40  
max °C +85

### Dimensions

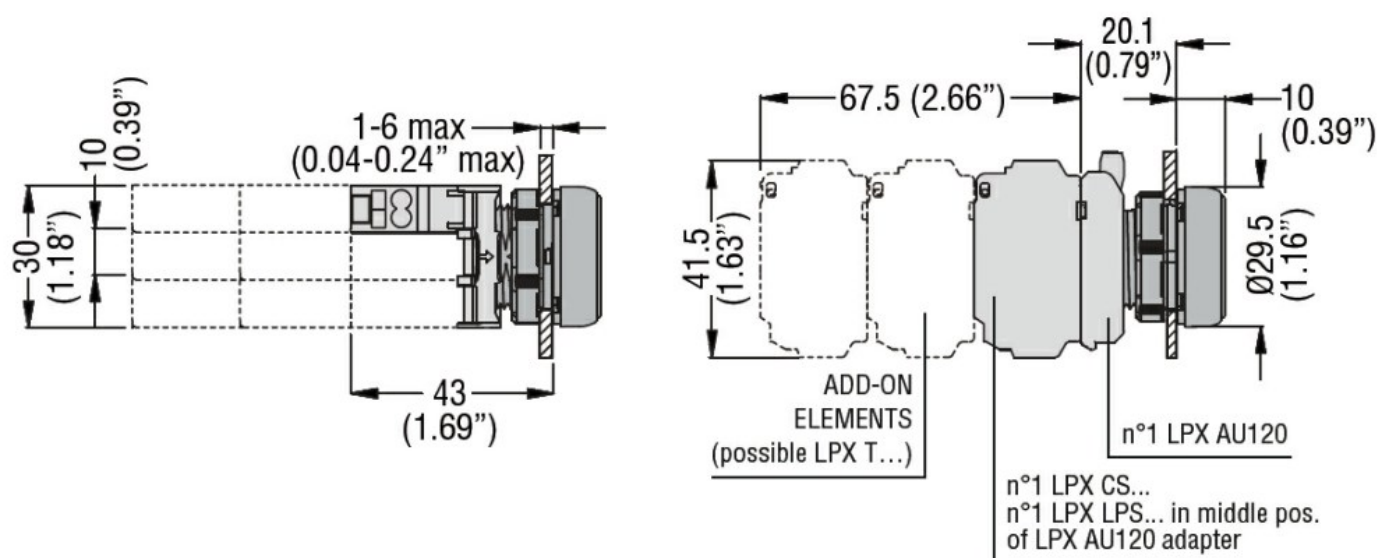

### Wiring diagrams

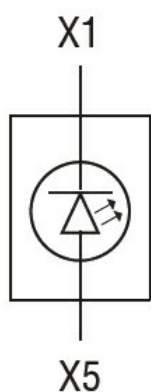

## Certifications and compliance

### Compliance

CSA C22.2 n° 14  
IEC/EN/BS 60947-1  
IEC/EN/BS 60947-5-1  
UL508

### Certificates

CCC  
cULus  
EAC  
RINA  
UL

## ETIM classification

ETIM 8.0

EC000204 -  
Lamp holder  
block for control  
circuit devices