
LED INTEGRATED LAMP-HOLDER, STEADY LIGHT Ø22MM PLATINUM SERIES, SCREW TERMINATION, 85...140VAC. YELLOW



Product designation				LED elements steady light
Product type designation				LPXLP
General characteristics				
Colour				Yellow
Electrical characteristic	s			
Supply voltage (AC)			V	85140
Operations				
Electrical life			hours	100000
Mechanical features				
Tightening torque for terminals max			Nm	1
Conductor section				
	AWG/kcmil conductor section			
		max		12
	IEC			
		max	mm²	1 or 2 / 2.5
Mounting adapter				LPXAU120
Weight			g	16
Ambient conditions				
Temperature				
•	Operating temperature			
		min	°C	-25
		max	°C	+70
	Storage temperature			
	J 1	min	°C	-40
		max	°C	+85
-			_	

Dimensions

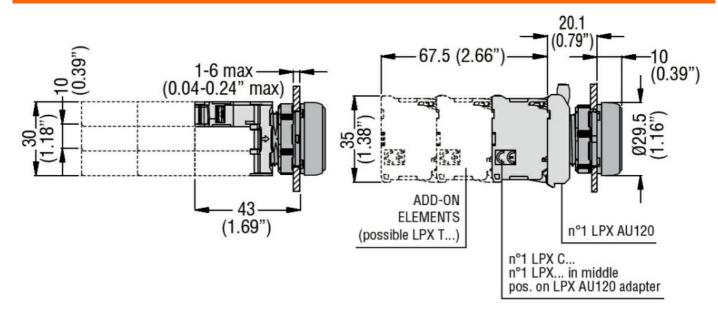

Wiring diagrams



LED INTEGRATED LAMP-HOLDER, STEADY LIGHT Ø22MM PLATINUM SERIES, SCREW TERMINATION, 85...140VAC. YELLOW



Certificat	ions and	comp	liance
Cortilloat	iono ana	COLLIP	iidi ioo

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

CCC

cULus

EAC

RINA

UL

ETIM classification

ETIM 8.0

EC000204 -Lamp holder block for control circuit devices