



Product designation

LED elements  
steady light with  
spring-clamp  
terminals

LPXLP

Product type designation

General characteristics

Colour

White

Electrical characteristics

Rated frequency

Hz 50-60

Supply voltage (AC)

V 85...140

Operations

Electrical life

hours 100000

Mechanical features

Conductor section

AWG/kcmil conductor section

max 14

IEC

max mm<sup>2</sup> 1 or 2 / 2.5

Mounting adapter

LPXAU120

Weight

g 15

Ambient conditions

Temperature



Operating temperature

min °C -25  
max °C +70


Storage temperature

min °C -40  
max °C +85

Dimensions

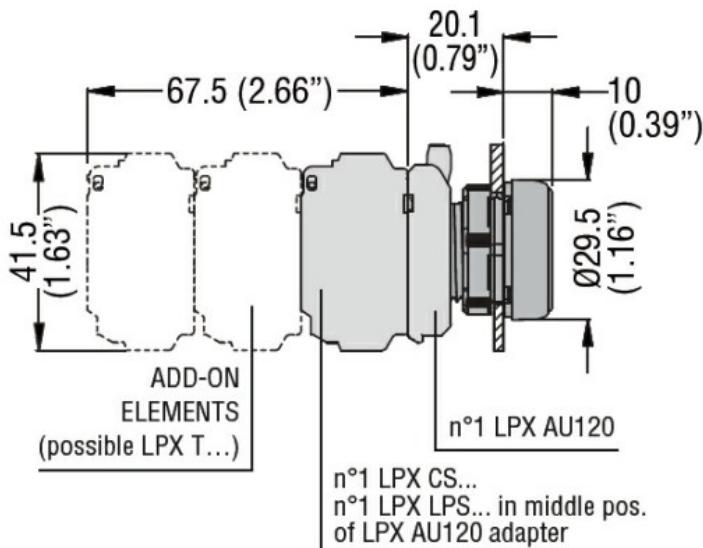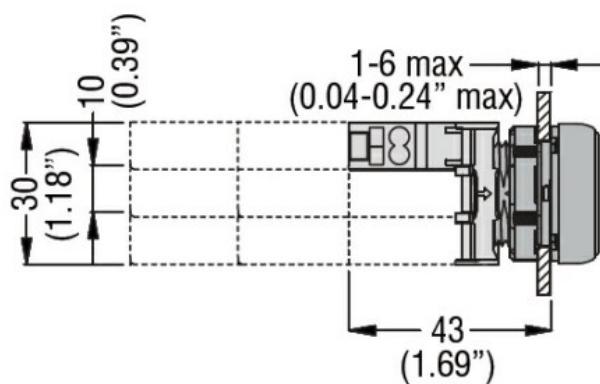

#### Wiring diagrams

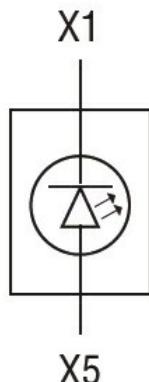

#### Certifications and compliance

##### Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

##### Certificates

CCC

cULus

EAC

RINA

UL

#### ETIM classification

##### ETIM 8.0

EC000204 -  
Lamp holder  
block for control  
circuit devices