



Product designation

LED elements
steady light with
spring-clamp
terminals

LPXLPSM5

Product type designation

General characteristics

Colour

Yellow

Electrical characteristics

Rated frequency

Hz 50-60

Supply voltage (AC)

V 185...265

Operations

Electrical life

hours 100000

Mechanical features

Conductor section

AWG/kcmil conductor section

max 14

IEC

max mm² 1 or 2 / 2.5

Mounting adapter

LPXAU120

Weight

g 15

Ambient conditions

Temperature



Operating temperature

min °C -25
max °C +70


Storage temperature

min °C -40
max °C +85

Dimensions

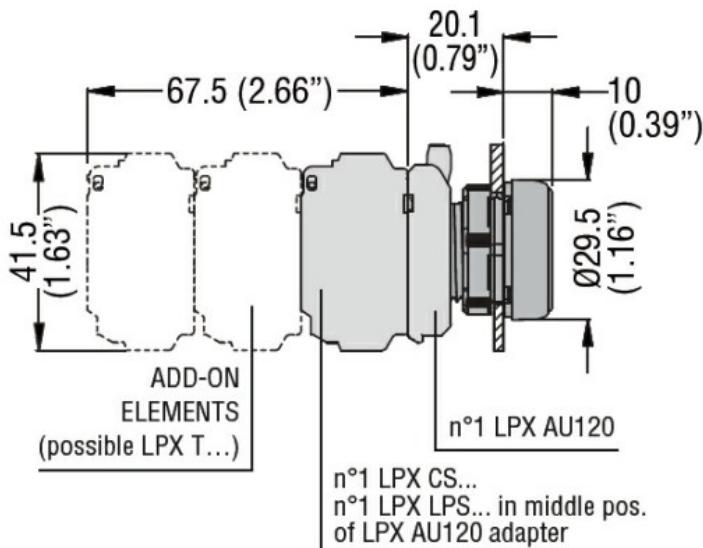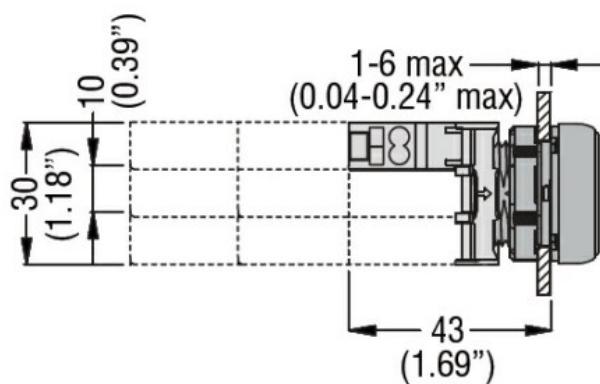

Wiring diagrams

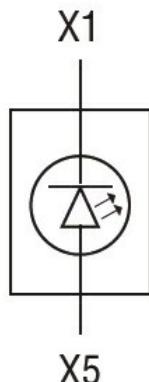

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

CCC

cULus

EAC

RINA

UL

ETIM classification

ETIM 8.0

EC000204 -
Lamp holder
block for control
circuit devices