



Enclosures with cut-outs for Ø22mm units - with hole for 4 actuators  
LPZM

Product designation

Product type designation

General characteristics

|                          |               |
|--------------------------|---------------|
| Colour                   | Grey          |
| IEC degree of protection | IP66 and IP67 |

Mechanical features

|        |   |     |
|--------|---|-----|
| Weight | g | 581 |
|--------|---|-----|


UL technical data

|                         |         |
|-------------------------|---------|
| UL degree of protection | NEMA 4X |
|-------------------------|---------|

Ambient conditions

|                       |  |     |    |     |
|-----------------------|--|-----|----|-----|
| Temperature           |  |     |    |     |
| Operating temperature |  | min | °C | -25 |
|                       |  | max | °C | +70 |
| Storage temperature   |  | min | °C | -40 |
|                       |  | max | °C | +85 |

Dimensions

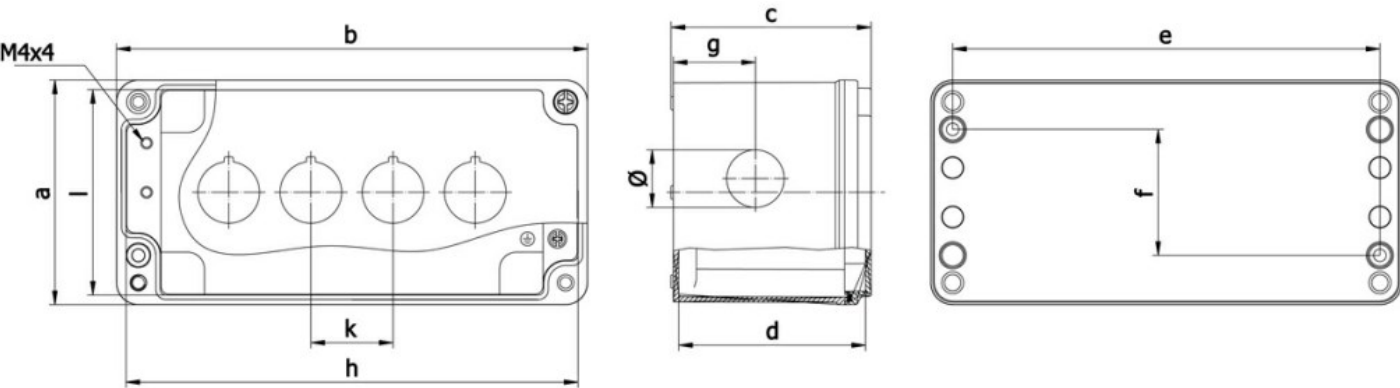

| a  | b   | c  | d  | e   | f  | g  | h   | l  | k  | Ø  |
|----|-----|----|----|-----|----|----|-----|----|----|----|
| 80 | 170 | 73 | 67 | 156 | 46 | 30 | 165 | 75 | 30 | 21 |

Certifications and compliance

|            |                  |
|------------|------------------|
| Compliance | CSA C22.2 n° 14  |
|            | IEC/EN 60947-1   |
|            | IEC/EN 60947-5-1 |
|            | UL508            |

|              |       |
|--------------|-------|
| Certificates | cULus |
|              | EAC   |

ETIM classification

ETIM 8.0

EC000200 -  
Enclosure for  
control circuit  
devices