



GREY CONTROL STATION LPZP3A8 COMPLETE WITH WHITE FLUSH PUSHBUTTON "I" LPCB1118 1NO, RED EXTENDED PUSHBUTTON "O" LPCB2104 1NC AND WHITE FLUSH PUSHBUTTON "II" LPCB1128 1NO



min

max

°C

°C

-40

+85

Grey control station LPZP3A8 complete with white flush pushbutton "i" LPCB1118 1NO, red extended pushbutton "o" LPCB2104 1NC and white flush pushbutton "ii" LPCB1128 1NO LPZP3B8905

Product type designation

Product designation


caact type accignance.				0_000
General characteristics				
Colour				Yellow
Material				Polycarbonate
IEC degree of protection				IP66, IP67, IP69K
Ambient conditions				
Temperature				
Operating tem	nperature			
		min	°C	-25
		max	°C	+70
Storage temp	erature			_

Dimensions



ENERGY AND AUTOMATION

GREY CONTROL STATION LPZP3A8 COMPLETE WITH WHITE FLUSH PUSHBUTTON "I" LPCB1118 1NO, RED EXTENDED PUSHBUTTON "O" LPCB2104 1NC AND WHITE FLUSH PUSHBUTTON "II" LPCB1128 1NO

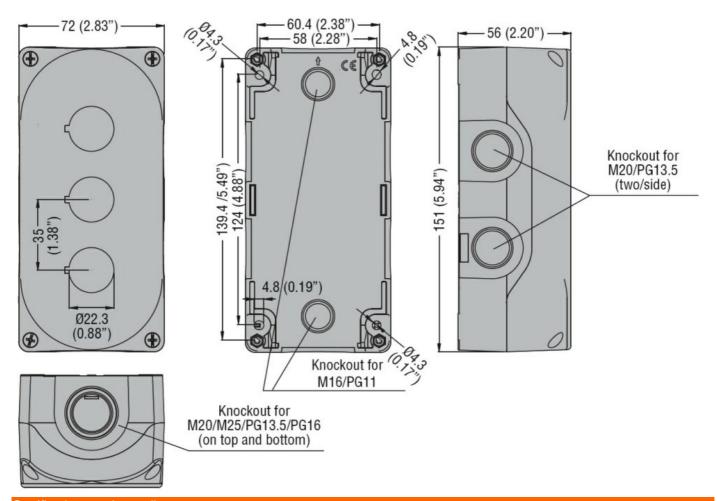

Certifications and compliance

Certificates

cULus

ETIM classification

ETIM 8.0

EC000225 -Control circuit devices combination in enclosure