LPZP3B8907

GREY CONTROL STATION LPZP3A8 COMPLETE WITH WHITE FLUSH PUSHBUTTON "UP ARROW" LPCB1158 1NO, RED EXTENDED PUSHBUTTON "O" LPCB2104 1NC AND WHITE FLUSH PUSHBUTTON "DOWN ARROW" LPCB1152 1NO

Product designation	Grey control station LPZP3A8 complete with white flush pushbutton "up arrow" LPCB1158 1NO, red extended pushbutton "o" LPCB2104 1NC and white flush pushbutton "down arrow" LPCB1152 1NO
Product type designation	LPZP3B8907

General characteristics

Colour	Grey
Material	Polycarbonate
IEC degree of protection	IP66, IP67, IP69K

Ambient conditions

Temperature

Operating temperature			
	min	°C	-25
	max	°C	+70
Storage temperature			
	min	°C	-40
	max	°C	+85

Dimensions

Lovato electric
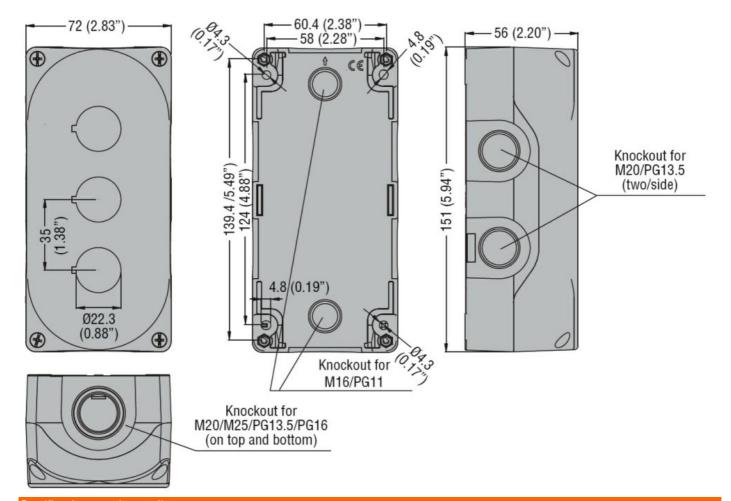ENERGY AND AUTOMATION

GREY CONTROL STATION LPZP3A8 COMPLETE WITH WHITE FLUSH PUSHBUTTON "UP ARROW" LPCB1158 1NO, RED EXTENDED PUSHBUTTON "O" LPCB2104 1NC AND WHITE FLUSH PUSHBUTTON "DOWN ARROW" LPCB1152 1NO

Knockout for M20/PG13.5 (two/side)

Knockout for M16/PG11

Knockout for M20/M25/PG13.5/PG16 (on top and bottom)

Certifications and compliance

Certificates

cULus

ETIM classification

ETIM 8.0	EC000225 - Control circuit devices combination in enclosure