GREY CONTROL STATION LPZP3A8 COMPLETE WITH GREEN FLUSH PUSHBUTTON "I" LPCB1113 1NO, RED EXTENDED PUSHBUTTON "O" LPCB2104 1NC AND GREEN PILOT LIGHT 24V

Product designation	Grey control station LPZP3A8 complete with green flush pushbutton "i" LPCB1113 1NO, red extended pushbutton "o" LPCB2104 1NC and green pilot light 24V
Product type designation	LPZP3B8911

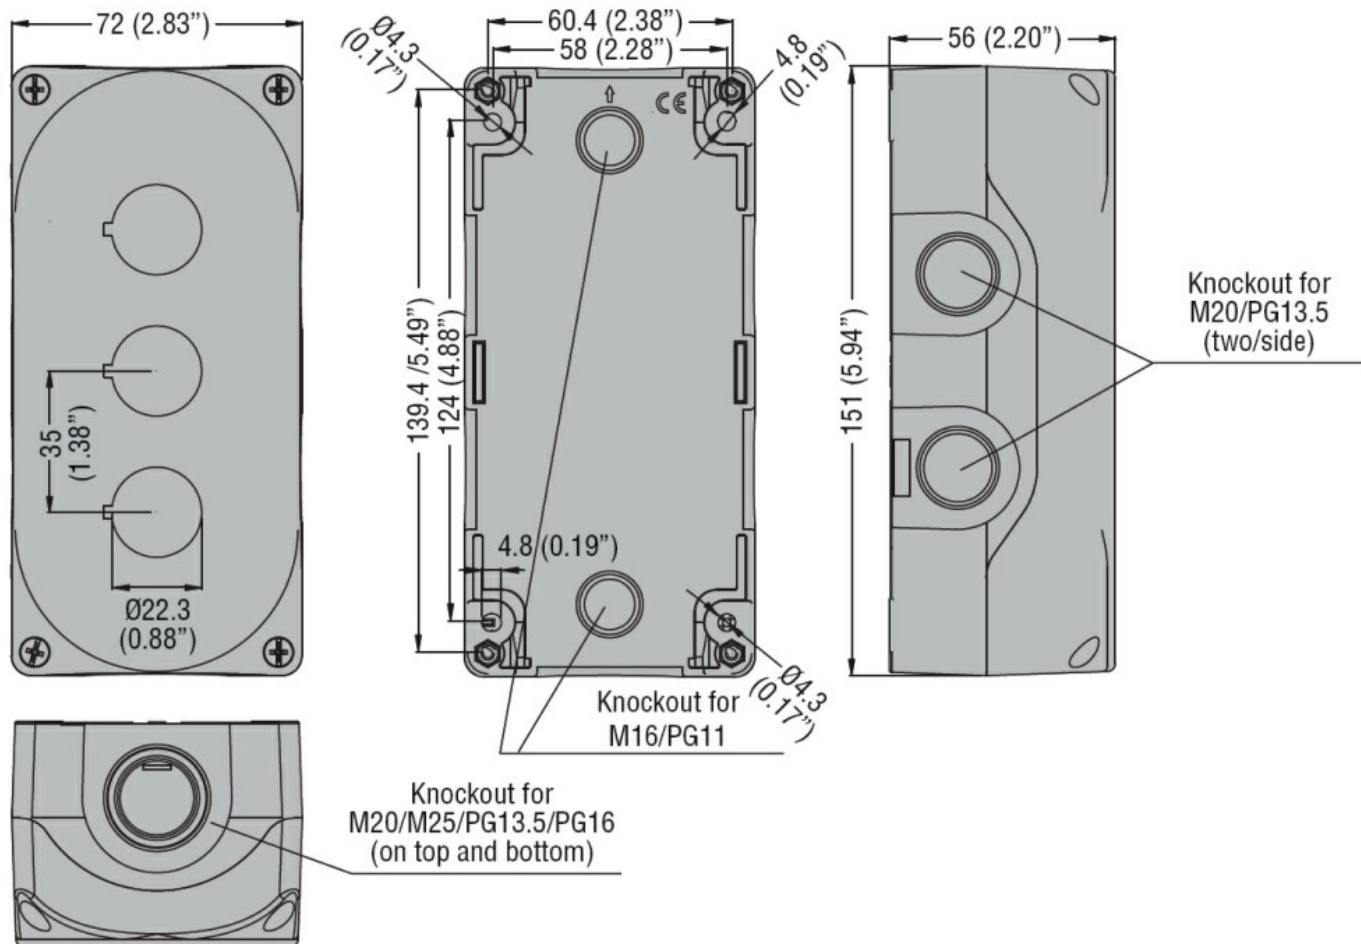| General characteristics			
Colour			Grey
Material			Polycarbonate
IEC degree of protection			IP66, IP67, IP69K

Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-25
	max	°C	+70
Storage temperature			
	min	°C	-40
	max	°C	+85

Dimensions			

GREY CONTROL STATION LPZP3A8 COMPLETE WITH GREEN FLUSH PUSHBUTTON "I" LPCB1113 1NO, RED EXTENDED PUSHBUTTON "O" LPCB2104 1NC AND GREEN PILOT LIGHT 24V

Knockout for M20/PG13.5 (two/side)

Knockout for M16/PG11

Knockout for M20/M25/PG13.5/PG16 (on top and bottom)

Certifications and compliance

Certificates

cULus

ETIM classification

ETIM 8.0	EC000225 - Control circuit devices combination in enclosure