



Product designation	Rope-pull lever with reset button					
Product type designation	P2L151312					
General characteristics						
Material						
	Housing	Aluminium-zinc alloy				
Contact characteristics						
Type of contact	2NO+2NC					
Thermal current I_{th}	A	6				
Rated insulation voltage U_i	V	250				
Short-circuit protection with fuse	Class/A	10 gG/SC QUICK FUSE				
IEC Conventional free air thermal current I_{th}	A	6				
Resistance per pole (average value)	m?	<10				
Mechanical features						
Operating head fixing	Fixed					
Operating torque	N	120				
	lb	27				
Tightening torque (Max)						
Switch fixing	Nm	2.5				
	lbin	22.1				
Contact terminals	Nm	0.8				
	lbin	7				
Body lid screw fixing	Nm	0.8				
	lbin	7				
Conductor section						
AWG/Kcmil	max	14				
IEC	min	mm ²	1 or 2			
	max	mm ²	2.5			
Cable connection						
	Self-releasing screw terminal					
Cable entry						
	PG11 with cable gland					
Weight	g	459				
Operations						
Mechanical life	cycles	100000				
Mechanical operation	cycles/h	1800				
Ambient conditions						
Temperature						

Operating temperature

min	°C	-25
max	°C	+70

Storage temperature

min	°C	-40
max	°C	+70

Resistance & Protection


IP degree

Body housing IP65


Pollution degree

3

Dimensions

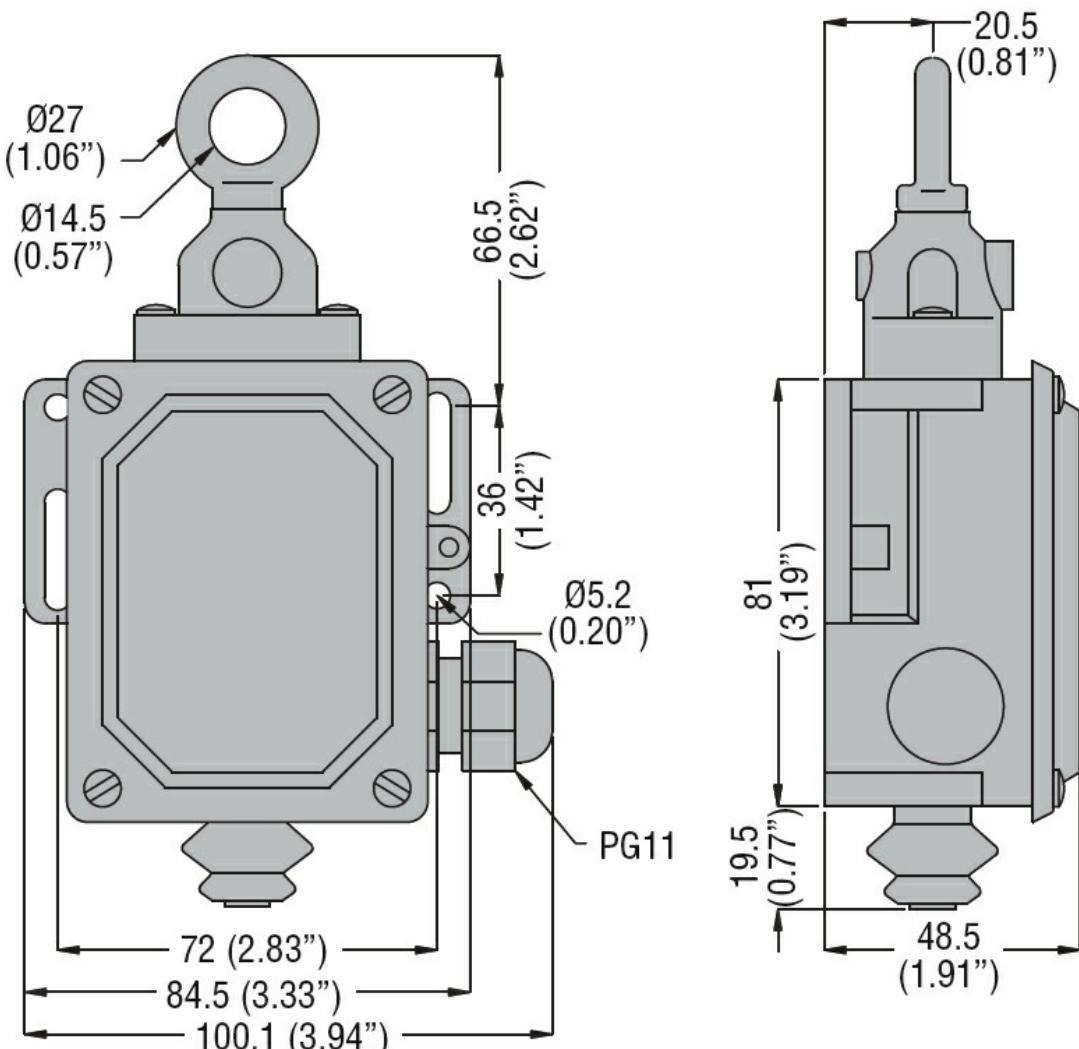

Wiring diagrams

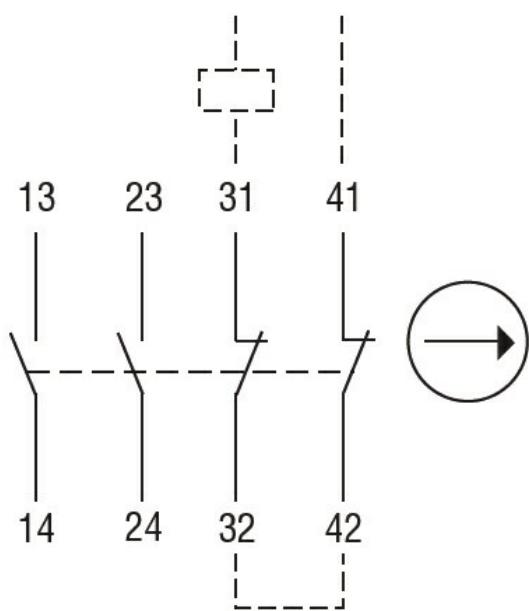

Certifications and compliance

Compliance

/

Certificates

EAC

ETIM classification

ETIM 8.0

EC000030 - End
switch