



Product designation

Rope-pull lever
without reset
button

Product type designation

P2L

General characteristics

Material

Housing Aluminium-zinc
 alloy

Contact characteristics

| | | |
|--|---------|------------------------|
| Type of contact | 1NO+1NC | |
| Thermal current I_{th} | A | 6 |
| Rated insulation voltage U_i | V | 400 |
| Short-circuit protection with fuse | Class/A | 10 gG/SC QUICK FUSE |
| IEC Conventional free air thermal current I_{th} | A | 6 |
| Resistance per pole (average value) | m? | <10 |

Mechanical features

| | | |
|-------------------------|-------|-----|
| Operating head fixing | Fixed | |
| Operating torque | N | 120 |
| | lb | 27 |
| Tightening torque (Max) | | |

Switch fixing

Nm 2.5
lbin 22.1

Conductor section

| | | |
|-----------|-----|---------------------|
| AWG/Kcmil | max | 14 |
| IEC | max | mm ² 2.5 |

Cable connection

Self-releasing
screw terminal

Cable entry

PG11 with cable
gland

Weight

g 459

Operations

| | | |
|----------------------|----------|-----------|
| Mechanical life | cycles | >10000000 |
| Mechanical operation | cycles/h | 3600 |

Ambient conditions

| | | | | |
|---------------------|-----------------------|-----|----|-----|
| Temperature | Operating temperature | min | °C | -25 |
| | | max | °C | +70 |
| Storage temperature | | min | °C | -40 |
| | | max | °C | +70 |

Resistance & Protection

IP degree


Body housing

IP65


Pollution degree

3

Dimensions

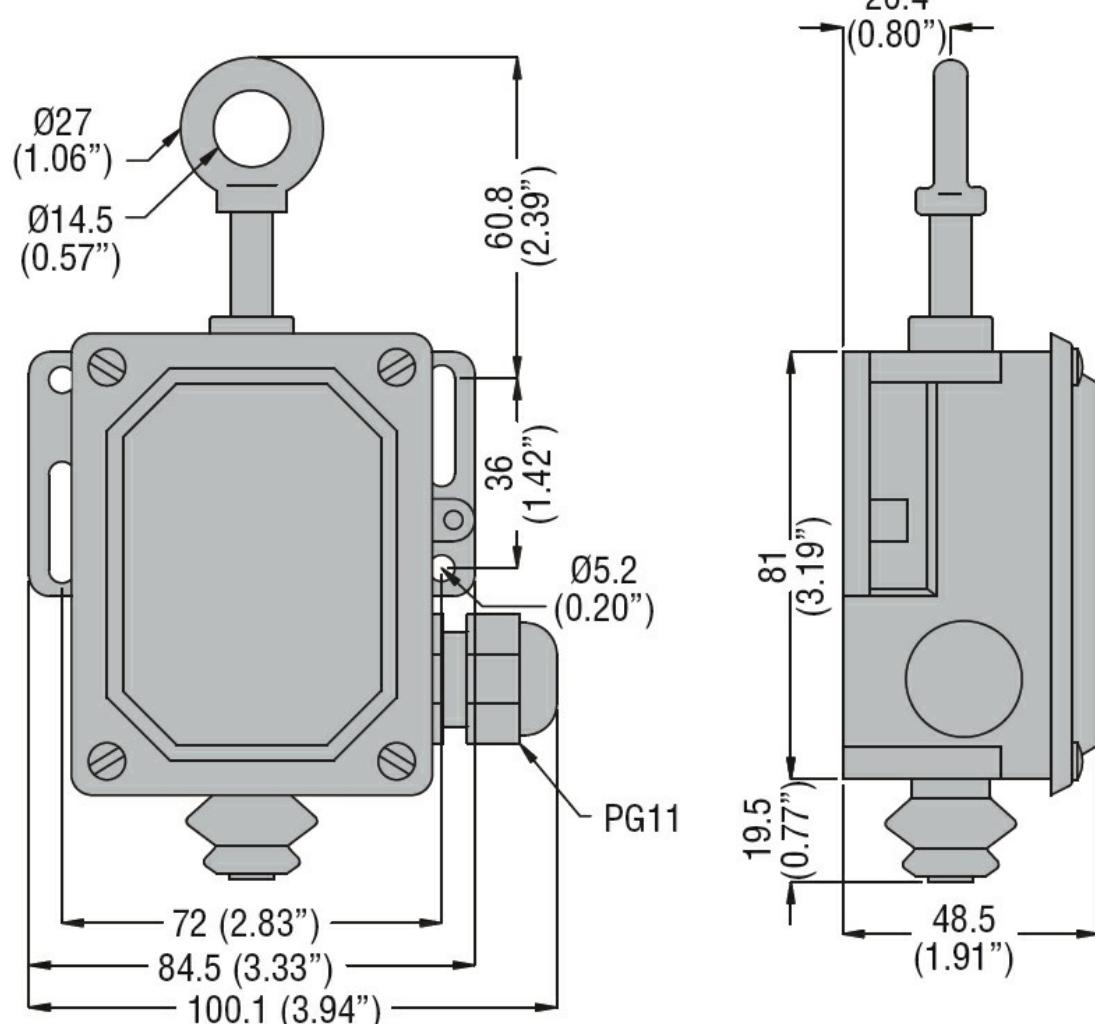

Wiring diagrams

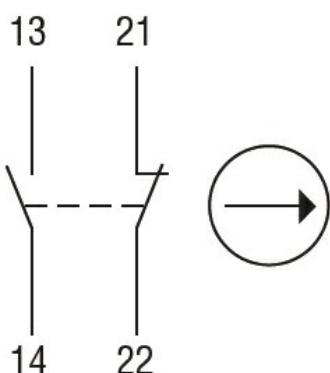

1NO + 1NC

Certifications and compliance

Compliance

EN 81-1.

IEC/EN 60947-1

IEC/EN 60947-5-1

Certificates

EAC

IMQ

ETIM classification

ETIM 8.0

EC000030 - End
switch