




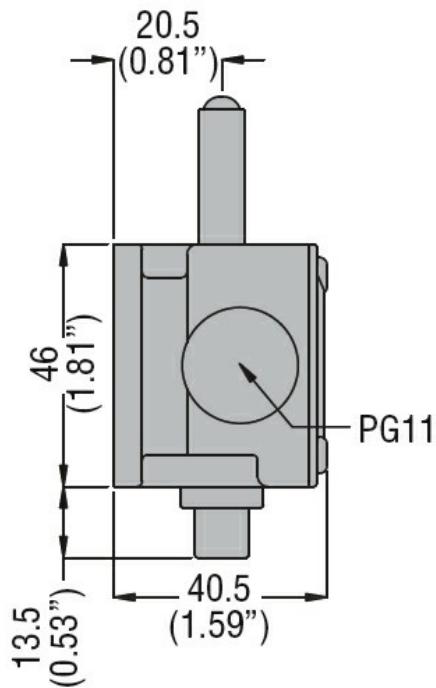

Product designation	Top push rod plunger PLN...A					
Product type designation	PLN...A					
General characteristics						
Material						
	Housing	Aluminium-zinc alloy				
Contact characteristics						
Type of contact	1NC					
Rated insulation voltage Ui	V	400				
Short-circuit protection with fuse	Class/A	10 gG/SC QUICK FUSE				
IEC Conventional free air thermal current Ith	A	10				
Resistance per pole (average value)	m?	<10				
Mechanical features						
Operating head fixing	Fixed					
Tightening torque (Max)	Switch fixing	Nm	2.5			
		lbin	22.1			
Conductor section						
AWG/Kcmil		max	14			
IEC		max	mm ² 2.5			
Weight		g	240			
Operations						
Mechanical life	cycles	>10000000				
Ambient conditions						
Temperature	Operating temperature	min	°C -25			
		max	°C +70			
Storage temperature		min	°C -40			
		max	°C +70			
Resistance & Protection						
IP degree	Body housing	IP40				
Dimensions						

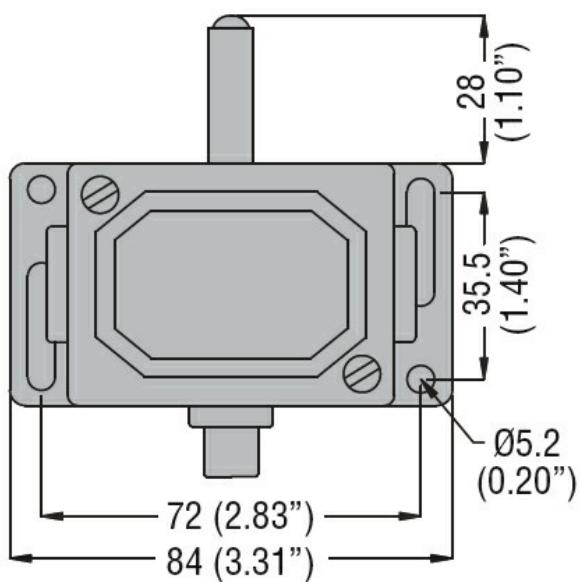

Wiring diagrams

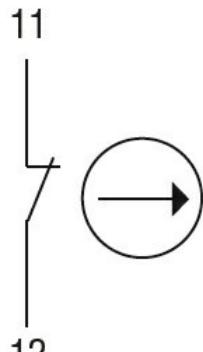

1NC

Certifications and compliance

Compliance

EN 81-1.

IEC/EN 60947-1

IEC/EN 60947-5-1

Certificates

EAC

IMQ

ETIM classification

ETIM 8.0

EC000030 - End switch