



Variable speed drives
VLB3

Product designation

Product type designation

General characteristics

Rated power supply voltage		400...480VAC 50/60Hz
Rated output voltage	VAC	Three-phase 0... 480VAC 0-599Hz
Rated output current	A	32
Rated output power	kW	15
Rated output power	HP	20 (Heavy load) / 25 (Standard load)
EMC filter		Built-in EMC suppressor cat. C2
Communication port		RS485, Modbus- RTU

Technical features

Input type		Three-phase
Rated mains voltage	VAC	400...480
Operating mains voltage range	VAC	340...528
Rated mains frequency	Hz	50/60
Operating mains frequency range	Hz	45...65
Rated mains current without mains choke		38.7 (heavy load) / 48 (standard load)
Rated mains current with mains choke		28.8 (heavy load) / 36 (standard load)
Output type		Three-phase
Output voltage range	VAC	0...480
Output frequency range	Hz	0...599
Current overload	%/s	150% for 60s; 200% for 3s
Apparent output power		22 (heavy load) / 26 (standard load)
Power loss		4kHz: 360W (heavy load) / 430 (standard load)
Brake chopper		Yes
Switching frequency		2...16kHz
Max motor cable length		



Shielded

Without EMC category m 100

	Category C1	m	3
	Category C2	m	20
	Category C3	m	35
Unshielded			
	Without EMC category	m	200
Functions			
Motor control modes			V/f linear, quadratic torque, sensorless vector control, ECO mode, servo control with encoder feedback, multipoint V/f curve, V/f closed loop control with encoder feedback, torque setpoint, sensorless
Speed reference signals			External potentiometer 0...10kΩ Voltage signals: 0... 10VDC or -10... +10VDC Current signals: 0/4... 20mA Buttons on front keyboard Door-mount installation kit 15 preset speeds via digital inputs Motor potentiom
3-wire control			Yes
S-shape curves			Yes
Slip compensation			Yes
Flying restart			Yes
Access to DC bus			Yes
DC braking			Yes
DC injection at start			Yes
PID control			Yes, with sleep and rinse function
Sequencer (programmable frequency/time cycles)			Yes
Preset speeds			Yes
Motorpotentiometer			Yes
Different parameter configuration sets			Yes
Parameters changeover function			Yes
Favorite parameters menu			Yes
Autotuning			No
Safe torque Off (STO) safety function			Optional
PTC probe input			Yes


Protections	Overcurrent Output short circuit and earth/ground leakage Overvoltage Undervoltage Phase loss Motor heat overload (i2t) Overspeed Speed reverse		
Special funct.	Multi-pump PID control (1 main pump frequency regulated + 2 auxiliary pumps activated in direct mode in case of necessity)		
Input and Output			
Number of digital input	Nr.	5	
Digital input type	Selectable PNP or NPN logic		
Number of digital output	Nr.	2	
Digital output arrangement	1 relay output with changeover contact (C/O-SPDT) + 1 digital output		
Output contacts ratings	Relay output: 3A 250VAC Digital output: 100mA max 30VDC		
Number of analog input	Nr.	2	
Analog input type	Configurable 0/2...10VDC, -10...+10VDC, 0...5VDC, 0/4...20mA		
Number of analog output	Nr.	1	
Analog output type	configurable as 0...10VDC, 0...5VDC, 2...10VDC, 0/4...20mA		
Ambient conditions			
Temperature	Operating temperature		
	min	°C	-10
	max	°C	+55

		Current derating	switching frequency 2 or 4kHz: 2.5%/°C over 45°C switching frequency 8 or 16kHz: 2.5%/°C over 40°C
Storage temperature			
		min	°C
		max	°C
			-25
			+60
Relative humidity			%
			5...95% (with no condensing)
Max altitude			m
			4000m (over 1000m derate the rated current by 5%/1000m)
Maximum Pollution degree			2
Overvoltage category			III up to 2000m altitude (II above 2000m)
Housing			
Installation position			Vertical
IP degree of protection			IP20
Dimensions (W x H x D)		mm	204.5 x 366 x 222
Weight		Kg	10.65
Dimensions			

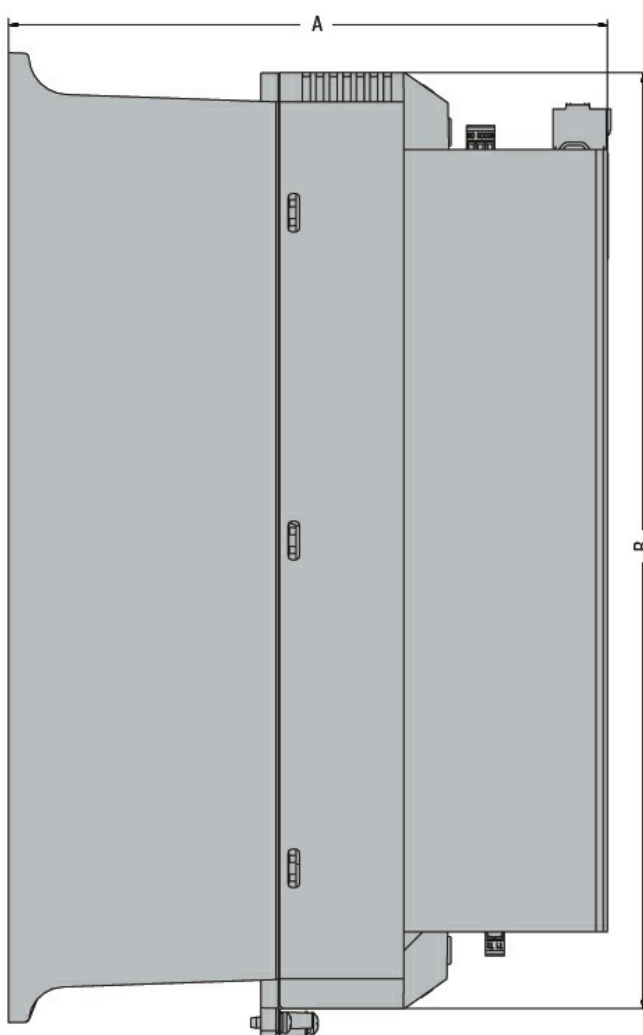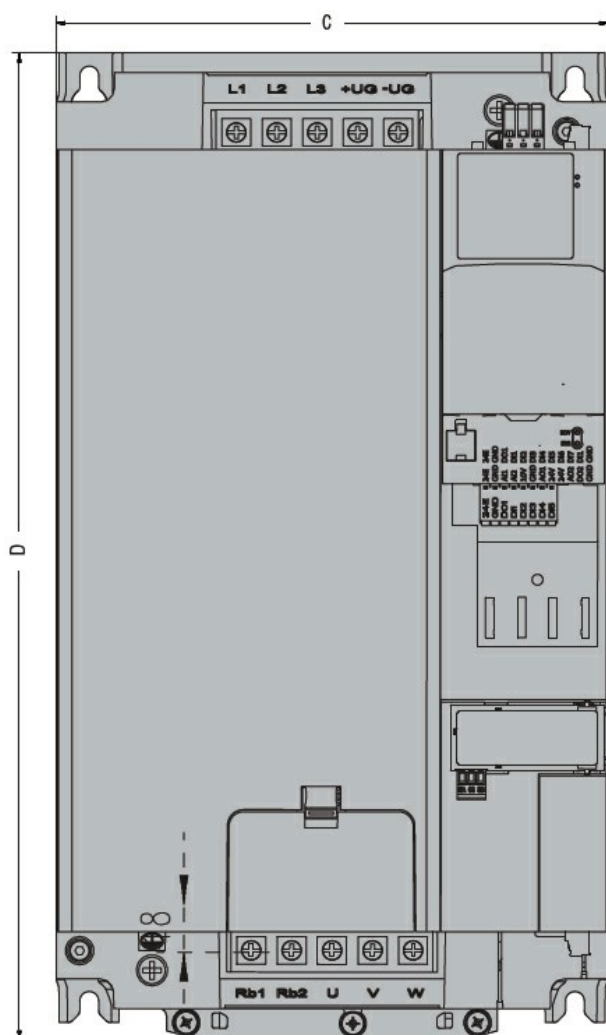

TYPE	A	B	C	D
VLB3 0150 A480	222 (8.74")	347 (13.66")	204.5 (8.05")	366 (14.41")
VLB3 0185 A480	222 (8.74")	347 (13.66")	204.5 (8.05")	366 (14.41")
VLB3 0220 A480	222 (8.74")	347 (13.66")	204.5 (8.05")	366 (14.41")
VLB3 0300 A480	230 (9.05")	450 (17.72")	250 (9.84")	520 (20.47")

Wiring diagrams

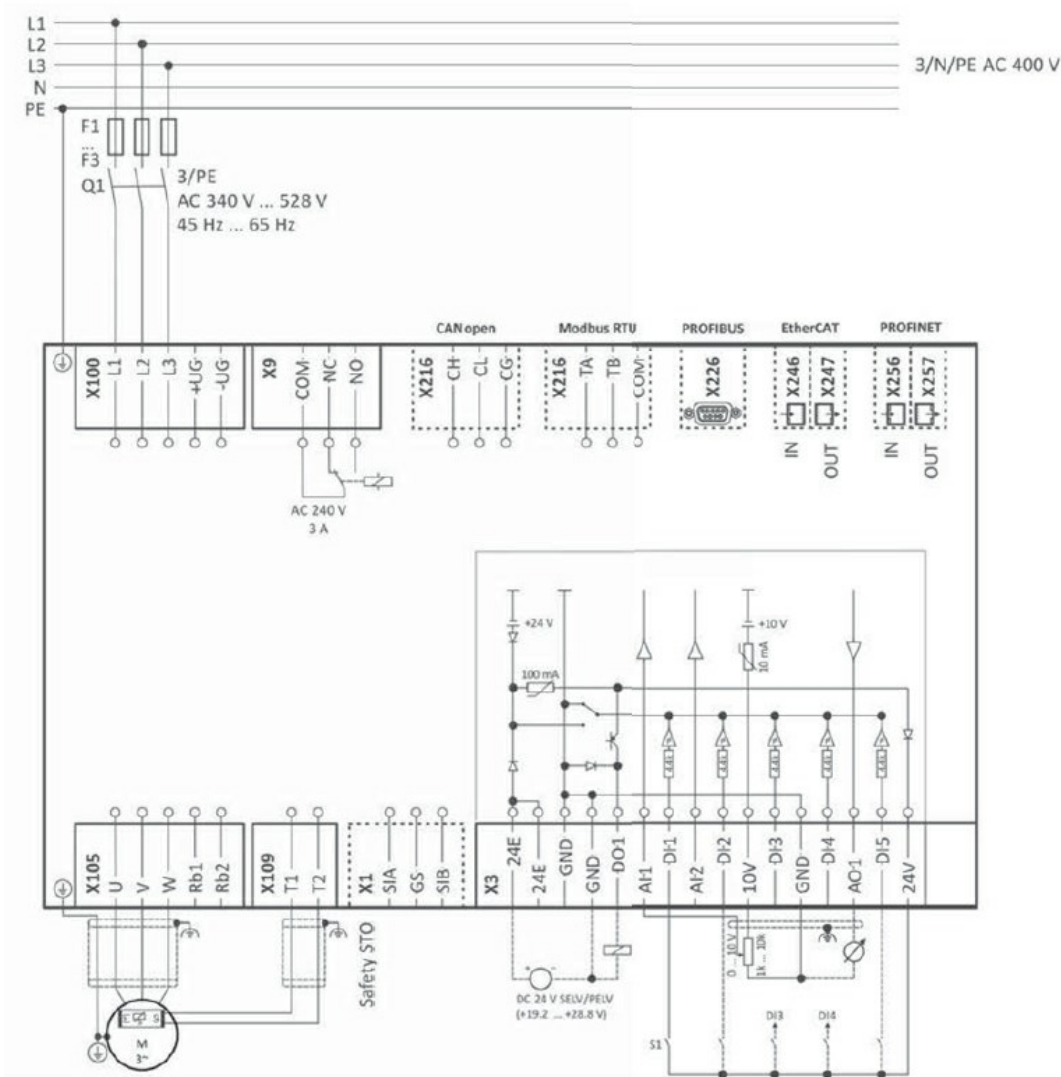

Certifications and compliance

Compliance

CSA 22.2 n°274

EN 61800-5-1

UL61800-5-1

Certificates

CSA

cULus

EAC

RCM

ETIM classification

ETIM 8.0

EC001857 -
Frequency
converter =< 1 kV