



12W Single Output Switching Power Supply

APV-12E series

SELV IP42 CE UK CA

■ Features

- Constant voltage design
- Protections: Short circuit / Over load / Over voltage
- Fully isolated plastic case
- Cooling by free air convection
- Small and compact size
- Class II power unit, no FG
- No load power consumption <0.5W
- IP42 design
- Suitable for LED lighting and moving sign applications
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

■ Applications


- Suitable for LED related fixture or appliance (such as LED Decoration or Advertisement devices)(Note.8)

■ Description

APV-12E series is one 12W AC/DC constant voltage mode single output LED power supply. It accepts input 180~264VAC and provides four models with different output voltage, 5V, 12V, 15V, 24V, respectively, that the small wattage LED applications employ the most frequently. Exploiting Class II design (without FG pin) and adopting the 94V-0 flame retardant plastic enclosure, APV-12E ideally fits the entry-level LED applications.

■ Model Encoding

APV - 12E - 15

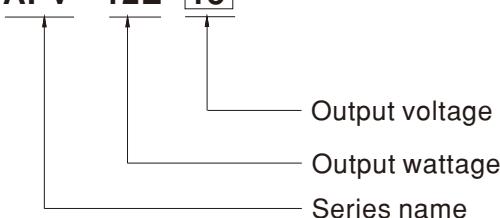



12W Single Output Switching Power Supply

APV-12E series

SPECIFICATION

MODEL	APV-12E-5	APV-12E-12	APV-12E-15	APV-12E-24			
OUTPUT	DC VOLTAGE	5V	12V	15V			
	RATED CURRENT	2A	1A	0.8A			
	CURRENT RANGE	0 ~ 2A	0 ~ 1A	0 ~ 0.8A			
	RATED POWER	10W	12W	12W			
	RIPPLE & NOISE (max.) Note.2	100mVp-p	120mVp-p	120mVp-p			
	VOLTAGE TOLERANCE Note.3	±5.0%					
	LINE REGULATION	±1.0%					
	LOAD REGULATION	±2.0%					
	SETUP, RISE TIME Note.6	500ms, 30ms / 230VAC at full load					
INPUT	HOLD UP TIME (Typ.)	20ms/230VAC at full load					
	VOLTAGE RANGE Note.4	180 ~ 264VAC	254 ~ 370VDC				
	FREQUENCY RANGE	47 ~ 63Hz					
	POWER FACTOR (Typ.)	PF>0.5/230VAC at full load					
	EFFICIENCY (Typ.)	75%	81%	81%			
	AC CURRENT	0.2A/230VAC					
	INRUSH CURRENT (Typ.)	COLD START 70A(twidth=120μs measured at 50% Ipeak) at 230VAC					
PROTECTION	MAX. No. of PSUs on 16A CIRCUIT BREAKER	17 units (circuit breaker of type B) / 29 units (circuit breaker of type C) at 230VAC					
	LEAKAGE CURRENT	0.25mA / 240VAC					
	OVER LOAD	Above 105% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed					
	OVER VOLTAGE	5.75 ~ 6.75V	13.8 ~ 16V	17.5 ~ 21V			
ENVIRONMENT	PROTECTION	Protection type : Shut off o/p voltage, clamping by zener diode					
	WORKING TEMP.	-30 ~ +70°C (Refer to "Derating Curve")					
	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)					
SAFETY & EMC	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes					
	SAFETY STANDARDS	EAC TP TC 004, IP42 approved; design refer to BS EN/EN 62368-1					
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC					
	ISOLATION RESISTANCE	I/P-O/P:>100M Ohms / 500VDC / 25°C / 70% RH					
OTHERS	EMC EMISSION	Compliance to BS EN/EN55032, BS EN/EN61000-3-2, BS EN/EN61000-3-3, EAC TP TC 020					
	EMC IMMUNITY	Compliance to BS EN/EN55024, BS EN/EN61000-4-2, 3, 4, 5, 6, 8, 11; light industry level (surge 2KV), criteria A, EAC TP TC 020					
	MTBF	1145.7K hrs min. MIL-HDBK-217F (25°C)					
NOTE	DIMENSION	77*40*29(L*W*H)					
	PACKING	0.08Kg; 120pcs/11.8Kg/1.06CUFT					
1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Derating may be needed under low input voltage. Please check the static characteristics for more details. 5. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 6. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time. 7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 8. This product is not intended for LED lighting luminaire applications in the EU.(In the EU the LPF/NPF/XLG series are recommended.) 9. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf							
※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx							




12W Single Output Switching Power Supply


APV-12E series

■ Mechanical Specification

Unit:mm

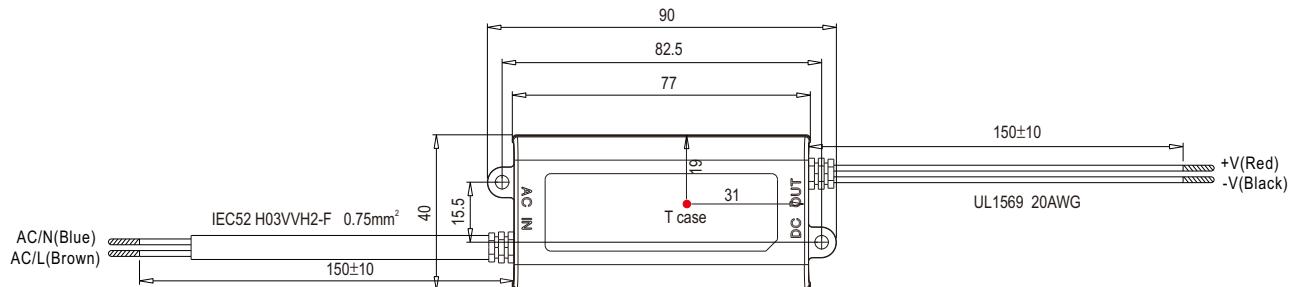


※ T case: Max. Case Temperature




■ Block Diagram

fosc · 67KHz

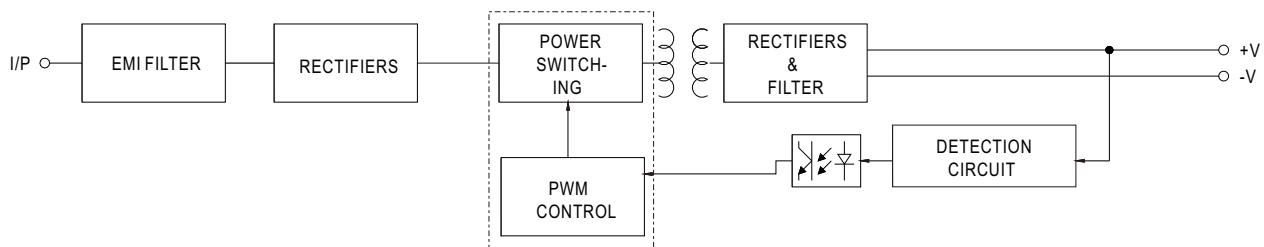

■ Derating Curve

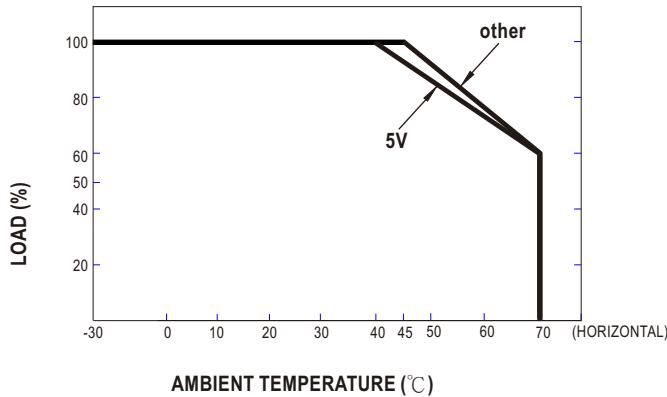

■ Static Characteristics

