



6W AC-DC Reliable Green Interchangeable Medical Adaptor

GEM06I series

■ Features

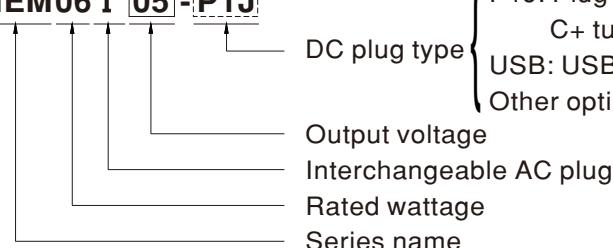
- Interchangeable AC plugs (plug kit sold separately)
- Medical safety approved (2 x MOPP) according to ANSI/AAMI ES60601-1/ES60601-1-11, BS EN/EN60601-1/BS EN/EN60601-1-11
- Extremely low leakage current
- No load power consumption < 0.3W
- **Energy efficiency Level V**
- -20~+70°C wide range working temperature
- Class II power (no earth pin)
- Protections: Short circuit / Overload / Over voltage
- Fully enclosed plastic case
- **Various DC plug quick adapter accessory available**
(Plug kit sold separately, please refer to :https://www.meanwell.com/upload/pdf/DC_plug.pdf)
- 3 years warranty

■ Description

GEM06I is a highly reliable, 6W wall-mounted style single-output green medical adaptor series, which is compact and convenient for carry. This product is equipped with an interchangeable AC plug (4 types, including European type, USA type, U.K. type and Australian type) that makes it very suitable for businessmen to use in the major countries around the globe. GEM06I is a class II power unit (no FG), accepting the input range from 80VAC to 264VAC that it can satisfy the demands for various types of medical electrical devices. The circuitry design meets the international medical standards (2*MOPP), having an ultra low leakage current (<55μA), fitting the medical devices in direct electrical contact with the patients.






With the working efficiency up to 80% and the extremely low no-load power consumption below 0.3W, GEM06I is compliant with the latest USA energy regulation EISA 2007/DoE(Level V) and EU ErP. The supreme feature allows the adaptor to save the energy when it is under either the operating mode or the standby mode. The entire series is approved for international safety regulations; moreover, it adopts the 94V-0 flame retardant plastic case that it can effectively prevent users from electric hazard.

■ Model Encoding

GEM06 I 05-P1J

P1J: Plug for standard model, 2.1 ϕ × 5.5 ϕ × 11mm,
C+ tuning fork type
USB: USB(type A) for 5V model only
Other option available by customer requested (See page 4~5)

Interchangeable AC plug Specifically for GEM06/12/18/30/40/60I

TYPE					
	Australian type	U.K type	European type	US type	Mix four type
ORDER NO.	AC plug-AU2	AC plug-UK2	AC plug-EU2	AC plug-US2	AC plug-MIX2

SPECIFICATION

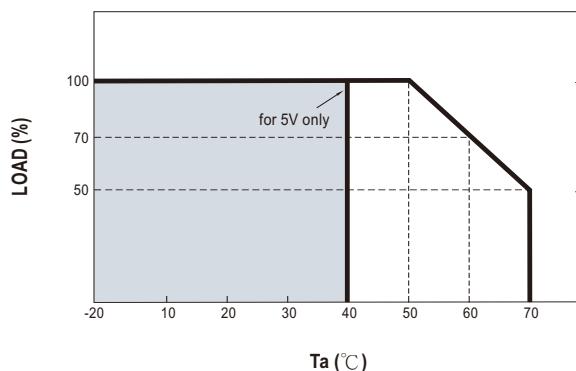
ORDER NO.	GEM06I05- <input type="checkbox"/> P1J <input type="checkbox"/> USB	GEM06I06-P1J	GEM06I07-P1J	GEM06I09-P1J	GEM06I12-P1J	GEM06I15-P1J	GEM06I18-P1J	GEM06I24-P1J																
OUTPUT	SAFETY MODEL NO.	GEM06I05	GEM06I06	GEM06I07	GEM06I09	GEM06I12	GEM06I15	GEM06I18	GEM06I24															
	DC VOLTAGE Note.2	5V	6V	7.5V	9V	12V	15V	18V	24V															
	RATED CURRENT	1.2A	1A	0.8A	0.66A	0.5A	0.4A	0.33A	0.25A															
	CURRENT RANGE	0 ~ 1.2A	0 ~ 1A	0 ~ 0.8A	0 ~ 0.66A	0 ~ 0.5A	0 ~ 0.4A	0 ~ 0.33A	0 ~ 0.25A															
	RATED POWER (max.)	6W	6W	6W	6W	6W	6W	6W	6W															
	RIPPLE & NOISE (max.) Note.3	50mVp-p	50mVp-p	80mVp-p	80mVp-p	100mVp-p	120mVp-p	150mVp-p	180mVp-p															
	VOLTAGE TOLERANCE Note.4	±5.0%	±5.0%	±5.0%	±5.0%	±5.0%	±5.0%	±5.0%	±4.0%															
	LINE REGULATION Note.5	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%															
INPUT	LOAD REGULATION Note.6	±5.0%	±5.0%	±5.0%	±5.0%	±3.0%	±3.0%	±3.0%	±2.0%															
	SETUP, RISE, HOLD UP TIME	1000ms, 50ms, 12ms at full load																						
PROTECTION	VOLTAGE RANGE Note.7	80 ~ 264VAC		113 ~ 370VDC																				
	FREQUENCY RANGE	47 ~ 63Hz																						
	EFFICIENCY (Typ.)	70%	74%	74%	76%	76%	79%	79%	80%															
	AC CURRENT	0.18A / 100VAC																						
	INRUSH CURRENT (max.)	Cold start 15A/ 115VAC 30A/ 230VAC																						
ENVIRONMENT	LEAKAGE CURRENT(max.)	Touch current < 55µA/264VAC																						
	OVERLOAD	>105% rated output power																						
		Protection type : Hiccup mode, recovers automatically after fault condition is removed																						
	OVER VOLTAGE	110 ~ 140% rated output power																						
		Protection type : Clamp by zener diode																						
SAFETY & EMC (Note. 8)	WORKING TEMP.	-20 ~ +70°C (Refer to "Derating Curve")																						
	WORKING HUMIDITY	20% ~ 90% RH non-condensing																						
	STORAGE TEMP., HUMIDITY	-20 ~ +85°C, 10 ~ 95% RH non-condensing																						
	TEMP. COEFFICIENT	±0.04% / °C (0 ~ 50°C)																						
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes																						
	SAFETY STANDARDS	TUV BS EN/EN60601-1/BS EN/EN60601-1-11,ANSI/AAMI ES60601-1/ES60601-1-11(3.1 version), CAN/CSA-C22 NO. 60601-1 3 rd edition, EAC TP TC 004 approved, GEM06I05-USB without BS EN/EN60601-1-11 , ANSI/AAMI ES60601-1-11																						
	ISOLATION LEVEL	Primary - Secondary: 2 x MOPP																						
	WITHSTAND VOLTAGE	I/P-O/P:5656VDC																						
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH																						
	EMC EMISSION	Parameter	Standard	Test Level / Note																				
		Conducted emission	BS EN/EN55011 (CISPR11),FCC PART 15 and 18/CISPR22	Class B																				
		Radiated emission	BS EN/EN55011 (CISPR11),FCC PART 15 and 18/CISPR22	Class B																				
		Harmonic current	BS EN/EN61000-3-2	Class A																				
	EMC IMMUNITY	Voltage flicker	BS EN/EN61000-3-3	-----																				
		BS EN/EN60601-1-2, BS EN/EN61204-3																						
		Parameter	Standard	Test Level / Note																				
		ESD	BS EN/EN61000-4-2	Level 4, 15KV air ; Level 4, 8KV contact																				
		RF field susceptibility	BS EN/EN61000-4-3	Level 3, 10V/m(80MHz~2.7GHz) Table 9, 9~28V/m(385MHz~5.78GHz)																				
OTHERS	CONNECTOR	EFT bursts	BS EN/EN61000-4-4	Level 3, 2KV																				
		Surge susceptibility	BS EN/EN61000-4-5	Level 3, 1KV/Line-Line																				
		Conducted susceptibility	BS EN/EN61000-4-6	Level 2, 3V																				
		Magnetic field immunity	BS EN/EN61000-4-8	Level 4, 30A/m																				
		Voltage dip, interruption	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods																				
NOTE	LIFE	3 years (12 hrs per day for 5V output)																						
	MTBF	500Khrs min. MIL-HDBK-217F(25°C)																						
	DIMENSION	73.9*39*48.5mm (L*W*H)																						
	PACKING	101g ; 72pcs / 8.3kg / CARTON for cable connection; 72g ; 150pcs / 11.8kg / CARTON for USB connection																						
	PLUG	See page 4~5 ; other type available by customer requested																						
	CABLE	See page 4~5 ; other type available by customer requested																						
	1.All parameters are specified at 230VAC input, rated load, 25°C 70% RH ambient. 2.DC voltage: The output voltage set at point measure by plug terminal & 50% load. 3.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1µF & 47µF capacitor. 4.Tolerance: includes set up tolerance, line regulation, load regulation. 5.Line regulation is measured from low line to high line at rated load. 6.Load regulation is measured from 10% to 100% rated load. 7.Derating may be needed under low input voltage. Please check the derating curve for more details. 8.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)																							
	※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx																							



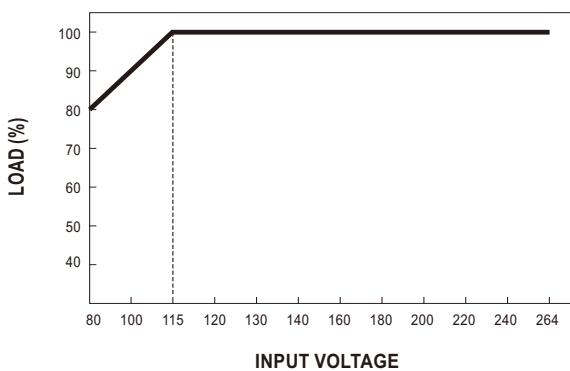
6W AC-DC Reliable Green Interchangeable Medical Adaptor

GEM06I series

■ Derating Curve



■ Static Characteristics

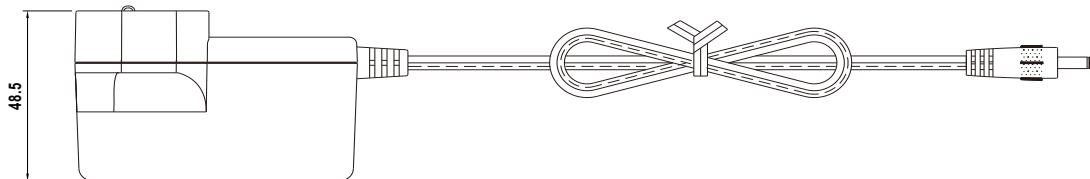
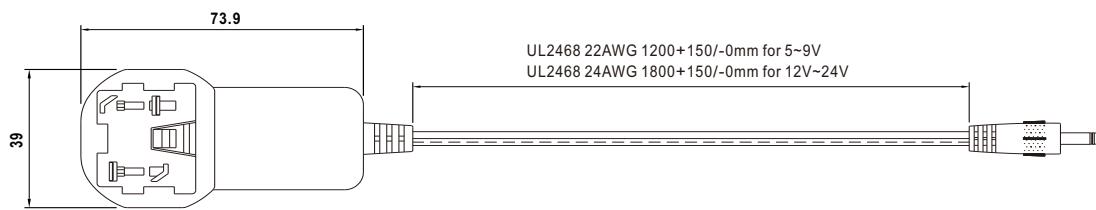


■ Mechanical Specification

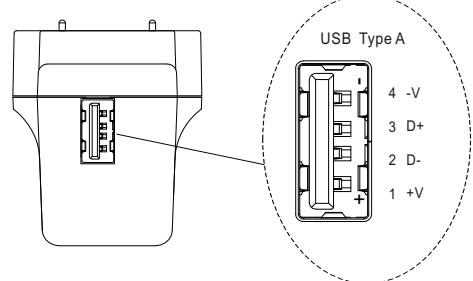
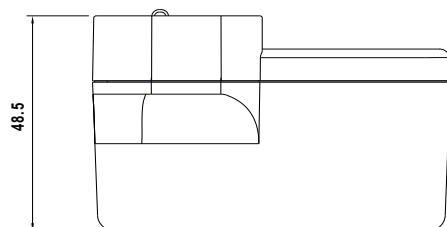
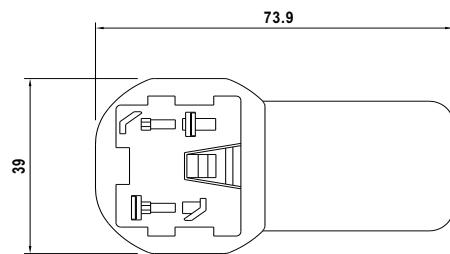
Unit:mm

TYPE				
Australian type				

※Cable connection



※USB connection



■ DC output plug

- ◎ Standard plug: P1J

Unit:mm

P1J	Pin Assignment
 	 Outside \ominus \oplus Inside

- ◎ DC plug changeable through:








- (1) Customization of the standard part with an optional DC plug according to the table (MOQ applicable)
- (2) Quick adapter accessory (sold separately without MOQ)

Please refer to below table and online selection guide : https://www.meanwell.com/upload/pdf/DC_plug.pdf

Example quick adapter accessory:






- ◎ Optional DC plug: (Available in customized cable or quick adapter)

Tuning Fork Style	Type No.	A	B	C	Quick Adapter Accessory
		OD	ID	L	
  	P1I	5.5	2.1	9.5	Available (Current rating: 7.5A max.)
	P1L	5.5	2.5	9.5	
	P1M	5.5	2.5	11.0	
	P1IR	5.5	2.1	9.5	
	P1JR	5.5	2.1	11.0	
	P1LR	5.5	2.5	9.5	
	P1MR	5.5	2.5	11.0	
Barrel Style		Type No.	A	B	None
  	Type No.	OD	ID	L	
	P2I	5.5	2.1	9.5	
	P2J	5.5	2.1	11.0	
	P2L	5.5	2.5	9.5	
	P2M	5.5	2.5	11.0	
	P2IR	5.5	2.1	9.5	
	P2JR	5.5	2.1	11.0	
	P2LR	5.5	2.5	9.5	
Lock Style		Type No.	A	B	None
  	Type No.	OD	ID	L	
	P2S(S761K)	5.53	2.03	12.06	
	P2K(761K)	5.53	2.54	12.06	
	P2C(S760K)	5.53	2.03	9.52	
Min. Pin Style		Type No.	A	B	Available (Current rating: 5A max.)
 	Type No.	OD	ID	L	
	P3A	2.35	0.7	11.0	
	P3B	4.0	1.7	11.0	
	P3C	4.75	1.7	11.0	



6W AC-DC Reliable Green Interchangeable Medical Adaptor

GEM06I series

Center Pin Style	Type No.	A	B	C	D	Quick Adapter Accessory	
		OD	ID	L	Center Pin		
	P4A	5.5	3.4	11.0	1.0	Available (Current rating: 7.5A max.)	
	P4B	6.5	4.4	11.0	1.4		
	P4C	7.4	5.1	11.0	0.6		
Min. DIN 3 Pin with Lock (male)	Type No.	Pin Assignment				Available (Current rating: 7.5A max.)	
		PIN No.		Output			
		1		+Vo			
	R6B	2		-Vo		Available (Current rating: 7.5A max.)	
		3		+Vo			
Min. DIN 4 Pin with Lock (male)		Pin Assignment					
	R7B	PIN No.		Output		Available (Current rating: 7.5A max.)	
		1		+Vo			
		2		-Vo			
		3		-Vo			
		4		+Vo			
Min. DIN 4 Pin with Lock (female)	R7BF	Pin Assignment				None	
		PIN No.		Output			
		1		+Vo			
		2		-Vo			
	R7BF	3		-Vo		None	
		4		+Vo			
Stripped and tinned leads		Pin Assignment					
	by customer	PIN No.		Output		None	
		1 (Ribbed)		+Vo			
Length of Land L1 by request (MW's standard length, L: <u>25</u> mm, L1: <u>10</u> mm)		2 (Letter)		-Vo			

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>