



■ Features

• Global certificates

- Universal AC input / Full range
- 3 pole AC inlet IEC320-C14, Class I power unit
- No load power consumption < 0.075W
- **Energy efficiency Level VI**
- Comply with EISA 2007/DoE, NRCan, Korea K-MEPS, AU/NZ MEPS, EU ErP and CoC Version 5
- Protections: Short circuit / Overload / Over voltage
- Fully enclosed plastic case
- Pass LPS
- -30~+70°C wide range working temperature
- LED indicator for power on
- **Various DC plug quick adapter accessory available**
(Plug kit sold separately, please refer to : https://www.meanwell.com/upload/pdf/DC_plug.pdf)
- 3 years warranty

■ Applications

- Consumer electronic devices
- Telecommunication devices
- Office facilities
- Industrial equipments

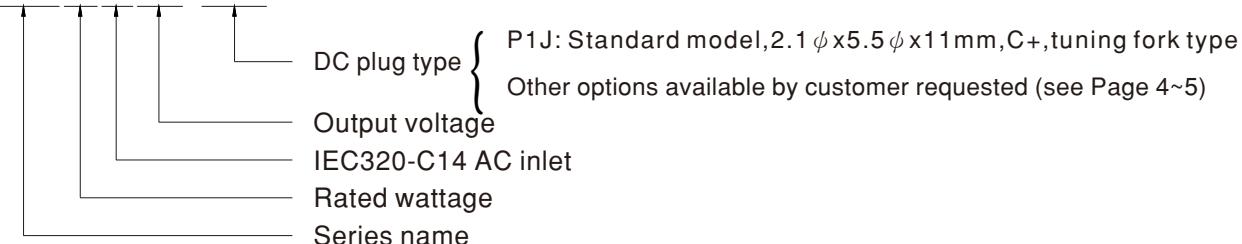
■ Description

GST18A is a highly reliable, 18W desktop style single-output green adaptor series. This product is a class I power unit (with FG), equipped with a standard IEC320-C14 AC inlet and adopting the input range from 85VAC to 264VAC. The entire series supplies different models with output voltages ranging between 5VDC and 48VDC that can satisfy the demands for various types of consumer electronic devices.

With the efficiency up to 89% and the extremely low no-load power consumption below 0.075W, GST18A is compliant with USA EISA 2007/DoE, Canada NRCan, Australia and New Zealand MEPS, Korea K-MEPS, EU ErP, and Code of Conduct(CoC) Version 5. The supreme feature allows the adaptor to save the energy when it is either under the operating mode or the standby mode. The entire series utilizes the 94V-0 flame retardant plastic case. GST18A is certified for the international safety regulations.

■ Model Encoding

GST 18 A 05 -P1J





SPECIFICATION

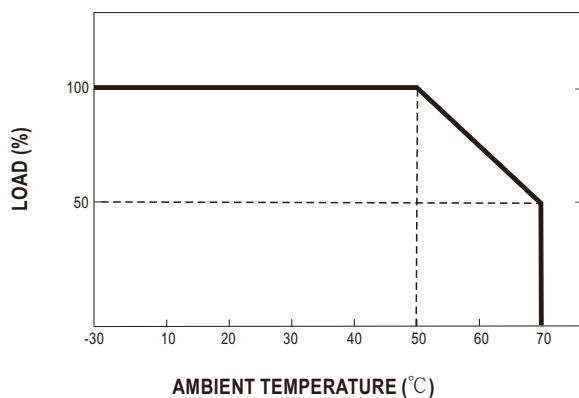
ORDER NO.	GST18A05-P1J	GST18A07-P1J	GST18A09-P1J	GST18A12-P1J	GST18A15-P1J	GST18A18-P1J	GST18A24-P1J	GST18A28-P1J	GST18A48-P1J														
OUTPUT	SAFETY MODEL NO.	GST18A05	GST18A07	GST18A09	GST18A12	GST18A15	GST18A18	GST18A24	GST18A28	GST18A48													
	DC VOLTAGE Note.2	5V	7.5V	9V	12V	15V	18V	24V	28V	48V													
	RATED CURRENT	3.0A	2.0A	2.0A	1.50A	1.20A	1.0A	0.75A	0.64A	0.375A													
	CURRENT RANGE	0 ~ 3.0A	0 ~ 2.0A	0 ~ 2.0A	0 ~ 1.50A	0 ~ 1.20A	0 ~ 1.0A	0 ~ 0.75A	0 ~ 0.64A	0 ~ 0.375A													
	RATED POWER (max.)	15W	15W	18W	18W	18W	18W	18W	18W	18W													
	RIPLPE & NOISE (max.) Note.3	80mVp-p	80mVp-p	80mVp-p	80mVp-p	100mVp-p	150mVp-p	150mVp-p	150mVp-p	150mVp-p													
	VOLTAGE TOLERANCE Note.4	±5.0%	±5.0%	±5.0%	±3.0%	±3.0%	±3.0%	±2.0%	±2.0%	±2.0%													
	LINE REGULATION Note.5	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%													
	LOAD REGULATION Note.6	±5.0%	±5.0%	±5.0%	±3.0%	±3.0%	±3.0%	±2.0%	±2.0%	±2.0%													
SETUP, RISE, HOLD UP TIME		1000ms, 30ms, 50ms/230VAC				1500ms, 30ms, 15ms/115VAC at full load																	
INPUT	VOLTAGE RANGE Note.7	85 ~ 264VAC																					
	FREQUENCY RANGE	47 ~ 63Hz																					
	EFFICIENCY (Typ.)	81%	85%	85%	86%	87%	88%	88%	88.5%	89%													
	AC CURRENT	0.5A / 115VAC	0.3A / 230VAC																				
	INRUSH CURRENT (max.)	Cold start 35A / 115VAC		65A / 230VAC																			
PROTECTION	LEAKAGE CURRENT(max.)	0.75mA / 240VAC																					
	OVERLOAD	110 ~ 150% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed																					
	OVER VOLTAGE	110 ~ 140% rated output voltage Protection type : Clamp by zener diode, output short																					
ENVIRONMENT	WORKING TEMP.	-30 ~ +70°C (Refer to "Derating Curve")																					
	WORKING HUMIDITY	20% ~ 90% RH non-condensing																					
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH non-condensing																					
	TEMP. COEFFICIENT	±0.03% / °C (0 ~ 50°C)																					
SAFETY & EMC (Note. 9)	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes																					
	SAFETY STANDARDS Note.8	UL62368-1, CSA C22.2 No.62368-1, TUV BS EN/EN62368-1, BSMI CNS 14336-1 , CCC GB4943.1, PSE J62368-1, AS/NZS 60950.1, BIS IS13252, KC K60950-1, EAC TP TC 004 approved; SIRIM MS IEC62368-1 (optional) approved																					
	WITHSTAND VOLTAGE	I/P-O/P:4242VDC , I/P-FG:2121VDC																					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG:100M Ohms / 500VDC / 25°C / 70% RH																					
	EMC EMISSION	Parameter	Standard	Test Level / Note																			
		Conducted emission	BS EN/EN55032(CISPR32),FCC PART 15/CISPR22 CAN ICES-3(B)/NMB-3(B),CNS13438,GB17625.1 EAC TP TC 020,MSIP KN32	Class B																			
		Radiated emission	BS EN/EN55032(CISPR32),FCC PART 15/CISPR22 CAN ICES-3(B)/NMB-3(B),CNS13438,GB17625.1 EAC TP TC 020,MSIP KN32	Class B																			
		Harmonic current	BS EN/EN61000-3-2,GB9254	Class A																			
	EMC IMMUNITY	Voltage flicker	BS EN/EN61000-3-3	-----																			
		Parameter	Standard	Test Level / Note																			
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air; Level 2, 4KV contact																			
		RF field susceptibility	BS EN/EN61000-4-3	Level 2, 3V/m																			
		EFT bursts	BS EN/EN61000-4-4	Level 2, 1KV																			
		Surge susceptibility	BS EN/EN61000-4-5	Level 3, 1KV/Line-Line , 2KV/Line-FG																			
		Conducted susceptibility	BS EN/EN61000-4-6	Level 2, 3V																			
OTHERS	PLUG	See page 4~5 ; Other type available by customer requested																					
	CABLE	See page 4~5 ; Other type available by customer requested																					
NOTE	1.All parameters are specified at 230VAC input, rated load, 25°C 70% RH ambient. 2.DC voltage: The output voltage set at point measure by plug terminal & 50% load. 3.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1μf & 47μf capacitor. 4.Tolerance: includes set up tolerance, line regulation, load regulation. 5.Line regulation is measured from low line to high line at rated load. 6.Load regulation is measured from 10% to 100% rated load. 7.Derating may be needed under low input voltage. Please check the derating curve for more details. 8.The demand for Malaysia safety is processed with the order no. GST18A □ -SIRIM by request. Please contact MEAN WELL for details. 9.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)																						
	※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx																						



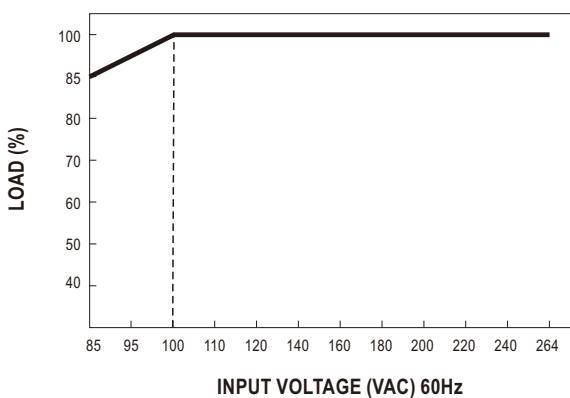
18WAC-DC Reliable Green Industrial Adaptor

GST18A series

■ Derating Curve

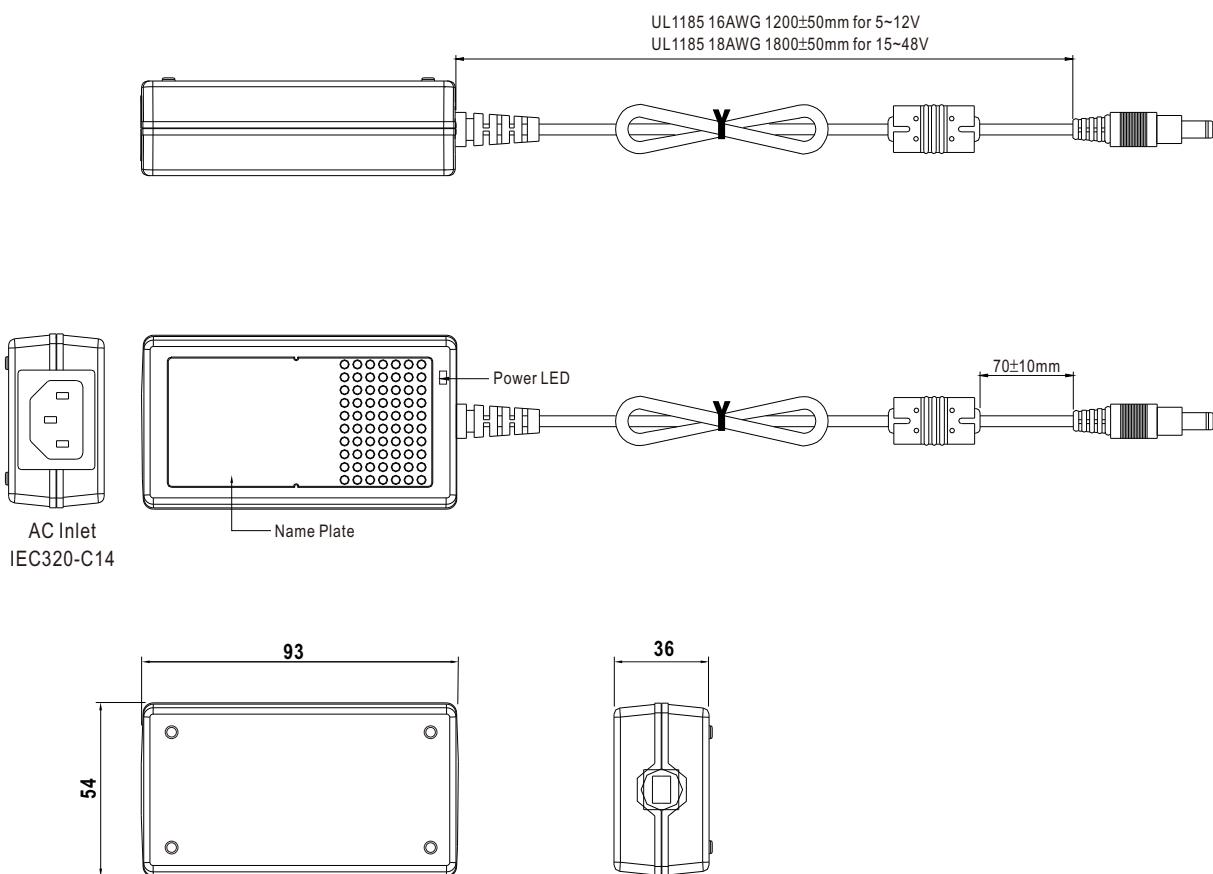


■ Static Characteristics




■ Mechanical Specification

Unit:mm



■ DC output plug

- ◎ Standard plug: P1J

P1J	Pin Assignment
	 Outside  Inside <small>-V not connected to AC FG(standard) -V connected to AC FG(optional)</small>
	

- ◎ DC plug changeable through:

(1) Customization of the standard part with an optional DC plug according to the table (MOQ applicable)




(2) Quick adapter accessory (sold separately without MOQ)

Please refer to below table and online selection guide : https://www.meanwell.com/upload/pdf/DC_plug.pdf

Example quick adapter accessory:







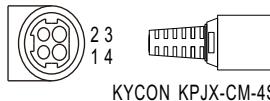
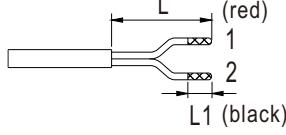
- ◎ Optional DC plug: (Available in customized cable or quick adapter)

Tuning Fork Style	Type No.	A	B	C	Quick Adapter Accessory
		OD	ID	L	
  (Straight)	P1I	5.5	2.1	9.5	Available (Current rating: 7.5A max.)
	P1L	5.5	2.5	9.5	
	P1M	5.5	2.5	11.0	
	P1IR	5.5	2.1	9.5	
	P1JR	5.5	2.1	11.0	
	P1LR	5.5	2.5	9.5	
	P1MR	5.5	2.5	11.0	
Barrel Style	Type No.	A	B	C	None
		OD	ID	L	
  (Straight)	P2I	5.5	2.1	9.5	
	P2J	5.5	2.1	11.0	
	P2L	5.5	2.5	9.5	
	P2M	5.5	2.5	11.0	
	P2IR	5.5	2.1	9.5	
	P2JR	5.5	2.1	11.0	
	P2LR	5.5	2.5	9.5	
Lock Style	Type No.	A	B	C	None
		OD	ID	L	
  (Straight)	P2S(S761K)	5.53	2.03	12.06	
	P2K(761K)	5.53	2.54	12.06	
	P2C(S760K)	5.53	2.03	9.52	
	P2D(760K)	5.53	2.54	9.52	
Floating Locking  SWITCHCRAFT original or equivalent					



18WAC-DC Reliable Green Industrial Adaptor

GST18A series

Min. Pin Style	Type No.	A	B	C	Quick Adapter Accessory	
		OD	ID	L		
  EIAJ equivalent	P3A	2.35	0.7	11.0	Available (Current rating: 5A max.)	
	P3B	4.0	1.7	11.0		
	P3C	4.75	1.7	11.0		
  EIAJ equivalent	Type No.	A	B	C	Available (Current rating: 7.5A max.)	
	P4A	OD	ID	L		
		5.5	3.4	11.0		
  KYCON KPPX-3P equivalent	Type No.	Pin Assignment			Available (Current rating: 7.5A max.)	
	R6B	PIN No.	Output			
		1	+Vo			
  KYCON KPPX-4P equivalent	Type No.	Pin Assignment			Available (Current rating: 7.5A max.)	
	R7B	PIN No.	Output			
		1	+Vo			
		2	-Vo			
		3	-Vo			
  KYCON KPJX-CM-4S equivalent	Type No.	Pin Assignment			None	
	R7BF	PIN No.	Output			
		1	+Vo			
		2	-Vo			
 	Type No.	Pin Assignment			Available (Current rating: 7.5A max.)	
	R1B	PIN No.	Output			
		1	-Vo			
		2	-Vo			
		3	+Vo			
  Length of Land L1 by request (MW's standard length, L: <u>25</u> mm, L1: <u>5</u> mm)	Type No.	Pin Assignment			None	
	by customer	PIN No.	Output			
		1	+Vo			
		2	-Vo			

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>