


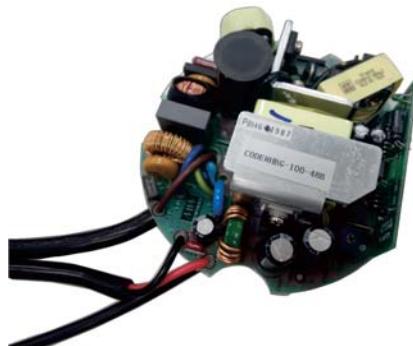

100W Constant Current Mode LED Driver

HBG-100P series

■ Features

- Constant Current mode output
- Circular shape PCB type design
- Built-in active PFC function
- Function options: output adjustable via potentiometer; 3 in 1 dimming; DALI
- Typical lifetime >50000 hours
- 5 years warranty


■ Applications

- LED bay lighting
- LED down lighting
- LED spot lighting
- LED mining lighting
- LED stage lighting

■ Description

HBG-100P series is a 100W AC/DC PCB type LED driver featuring the circular shape design. It operates from 90~305VAC and offers constant current output models with different rated voltage ranging between 36V and 60V. Thanks to the high efficiency up to 91.5%, with the fanless design, the entire series is able to operate for -40°C ~ +45°C under free air convection. HBG-100P is equipped with various function options, such as dimming methodology, so as to provide the optimal design flexibility for LED lighting system.

■ Model Encoding

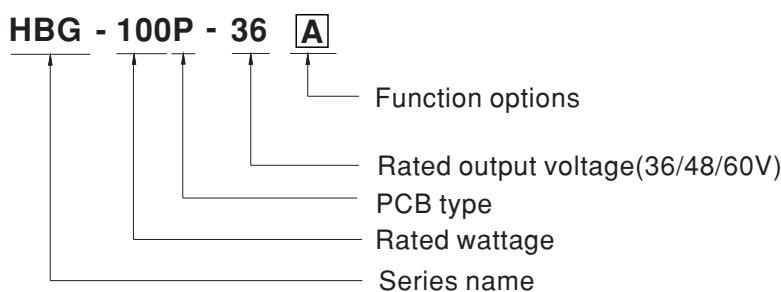

Type	Function	Note
A	I _o adjustable through built-in potentiometer.	In Stock
B	3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)	In Stock
DA	DALI control technology.	In Stock



100W Constant Current Mode LED Driver

HBG-100P series

SPECIFICATION


MODEL	HBG-100P-36 <input type="checkbox"/>	HBG-100P-48 <input type="checkbox"/>	HBG-100P-60 <input type="checkbox"/>
OUTPUT	RATED CURRENT 2.7A	2A	1.6A
	RATED POWER 97.2W	96W	96W
	CONSTANT CURRENT REGION Note.2 21.6 ~ 36V	28.8 ~ 48V	36 ~ 60V
	OPEN CIRCUIT VOLTAGE (max.) 37V	49V	62V
	CURRENT ADJ. RANGE Adjustable for A-Type only (via built-in potentiometer)		
	1.62 ~ 2.7A	1.2 ~ 2A	1.0 ~ 1.6A
	CURRENT RIPPLE 5.0% max. @rated current		
INPUT	CURRENT TOLERANCE $\pm 5.0\%$		
	SET UP TIME Note.4 2000ms / 115VAC 500ms / 230VAC		
	VOLTAGE RANGE Note.3 90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)		
	FREQUENCY RANGE 47 ~ 63Hz		
	POWER FACTOR PF $\geq 0.96/115VAC$, PF $\geq 0.96/230VAC$, PF $\geq 0.94/277VAC$ @full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)		
	TOTAL HARMONIC DISTORTION THD $< 20\%$ (@load $\geq 60\%$ /115V, 230VAC; @load $\geq 75\%$ /277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)		
	EFFICIENCY (Typ.) Note.5 91%	91%	91.5%
PROTECTION	AC CURRENT 1.1A / 115VAC 0.5A / 230VAC 0.45A / 277VAC		
	INRUSH CURRENT(Typ.) COLD START 60A(twidth=550 μ s measured at 50% Ipeak) at 230VAC; Per NEMA 410		
	MAX. No. of PSUs on 16A CIRCUIT BREAKER 4 units (circuit breaker of type B) / 8 units (circuit breaker of type C) at 230VAC		
	LEAKAGE CURRENT <0.75mA / 277VAC		
	NO LOAD / STANDBY POWER CONSUMPTION Standby power consumption <0.5W for B/DA-Type A-Type please refer to Note. 7		
	OVER CURRENT 95 ~ 108%		
	Constant current limiting, recovers automatically after fault condition is removed		
ENVIRONMENT	OVER VOLTAGE 41 ~ 49V	54 ~ 63V	65 ~ 75V
	Shut down o/p voltage, re-power on to recovery		
	OVER TEMPERATURE Note.11 Shut down o/p voltage, re-power on to recovery		
	WORKING TEMP. Ta=-40 ~ +45°C (Please refer to " OUTPUT LOAD vs TEMPERATURE" section)		
	WORKING HUMIDITY 20 ~ 95% RH non-condensing		
	STORAGE TEMP., HUMIDITY -40 ~ +80°C, 10 ~ 95% RH		
	TEMP. COEFFICIENT $\pm 0.03\%/\text{C}$ (0 ~ 45°C)		
SAFETY & EMC	VIBRATION 10 ~ 500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes		
	SAFETY STANDARDS UL8750, CSA C22.2 No.250.13-12; ENEC BS EN/EN1347-1, BS EN/EN1347-2-13, BS EN/EN62384, GB19510.1, GB19510.14, EAC TP 004 approved		
	DALI STANDARDS Compliance to IEC62386-101, 102, 207 for DA-Type only		
	WITHSTAND VOLTAGE I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC		
	ISOLATION RESISTANCE I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH		
	EMC EMISSION Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@load $\geq 60\%$) ; BS EN/EN61000-3-3, GB17743, GB17625.1, EAC TP TC 020		
	EMC IMMUNITY Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN61547, light industry level(surge immunity:Line-Earth:4KV, Line-Line:2KV), EAC TP TC 020		
OTHERS	MTBF 346.8Khrs min. MIL-HDBK-217F (25°C)		
	DIMENSION Refer to mechanical specification		
	PACKING 0.3Kg; 45pcs/14.5Kg/1.60CUFT		
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. 2. Please refer to "DRIVING METHODS OF LED MODULE". 3. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. 4. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time. 5. The DA type power supply is less efficient than the typical efficiency in specification by 1%. 6. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 7. To fulfil requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains. 8. This series meets the typical life expectancy of >50,000 hours of operation when Ta is about 45°C or less. 9. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com 10. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 11. All functional testing must be filled with potting, including OTP function. ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx		



100W Constant Current Mode LED Driver


HBG-100P series

■ BLOCK DIAGRAM

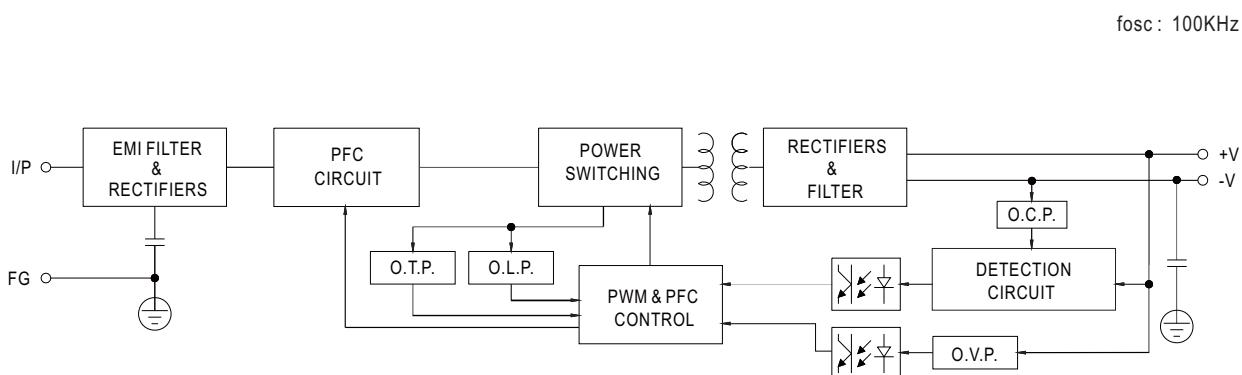


■ DRIVING METHODS OF LED MODULE

※ This series works in constant current mode to directly drive the LEDs.

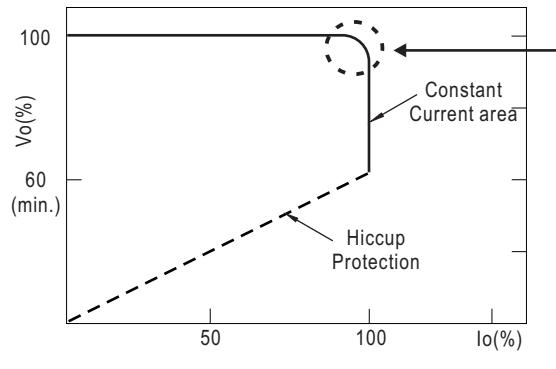

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.
Should there be any compatibility issues, please contact MEAN WELL.



■ DIMMING OPERATION

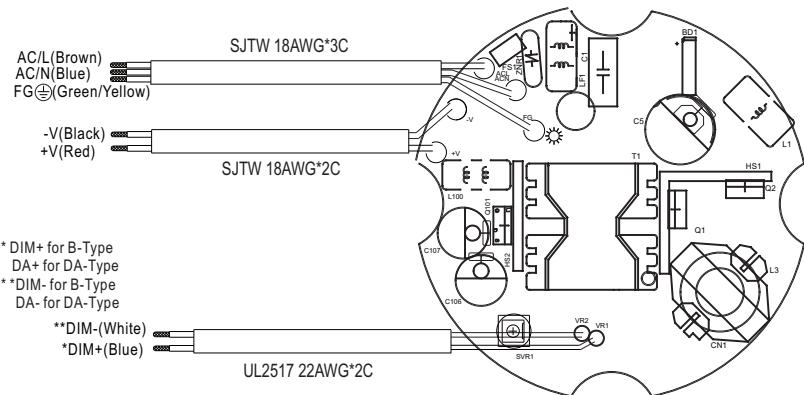



※ 3 in 1 dimming function (for B-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100 μ A (typ.)

◎ Applying additive 1 ~ 10VDC

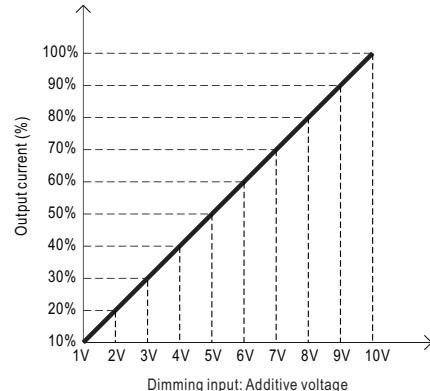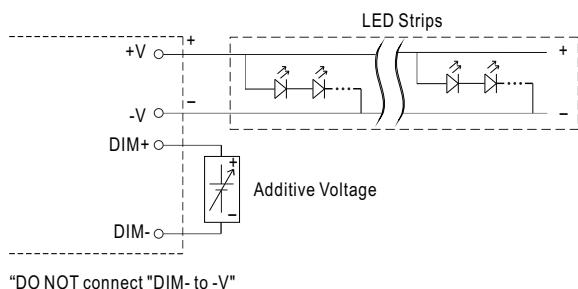

◎ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

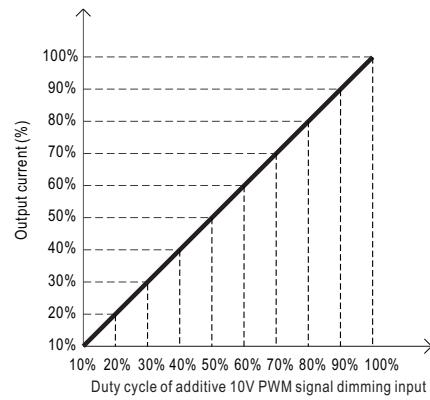
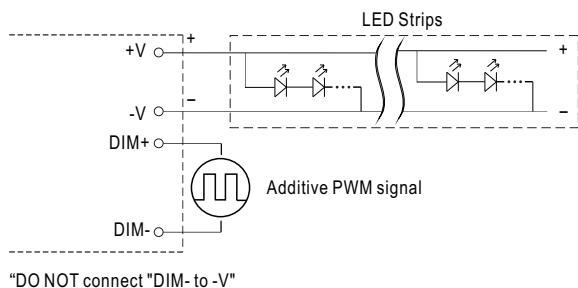





100W Constant Current Mode LED Driver

HBG-100P series

◎ Applying additive resistance:

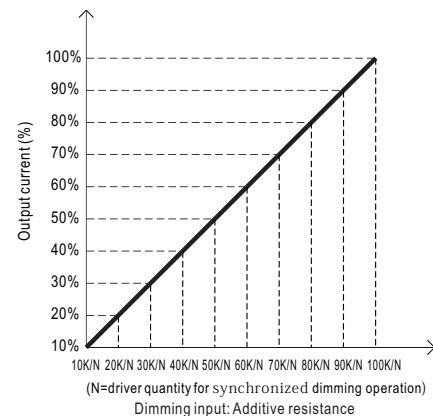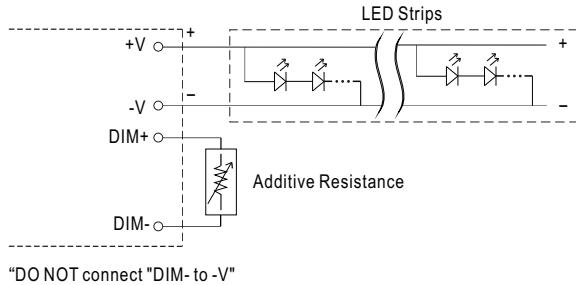

Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

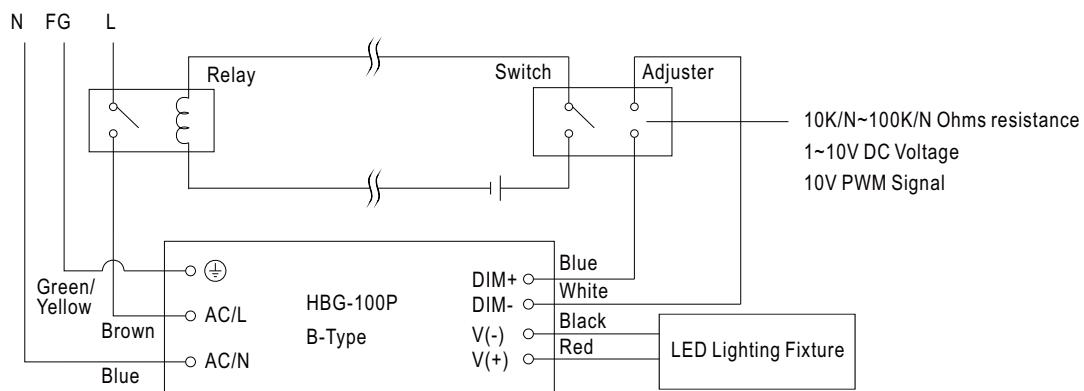


Using a switch and relay can turn ON/OFF the lighting fixture.


※ DALI Interface (primary side; for DA-Type)

- Apply DALI signal between DA+ and DA-.
- DALI protocol comprises 16 groups and 64 addresses.
- First step is fixed at 8% of output.

■ OUTPUT LOAD vs TEMPERATURE

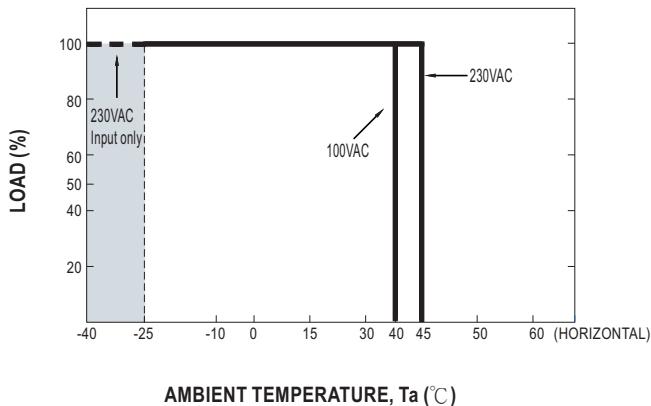


■ STATIC CHARACTERISTIC

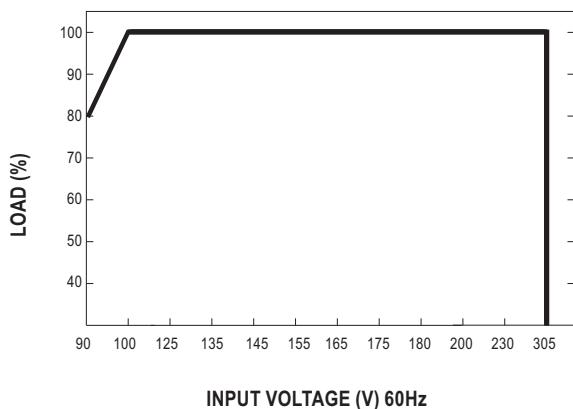


※ De-rating is needed under low input voltage.

■ POWER FACTOR (PF) CHARACTERISTIC

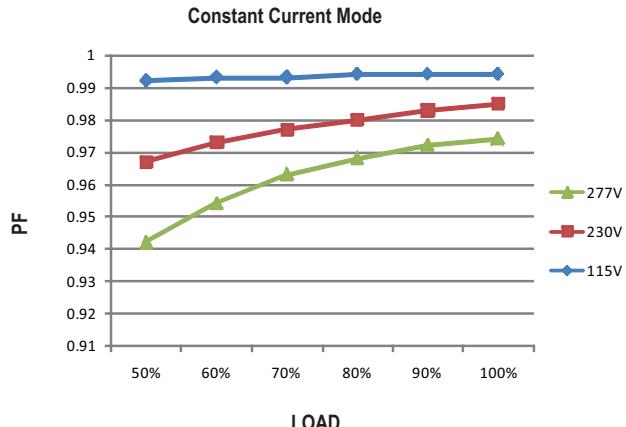

■ TOTAL HARMONIC DISTORTION (THD)


※ 60V Model

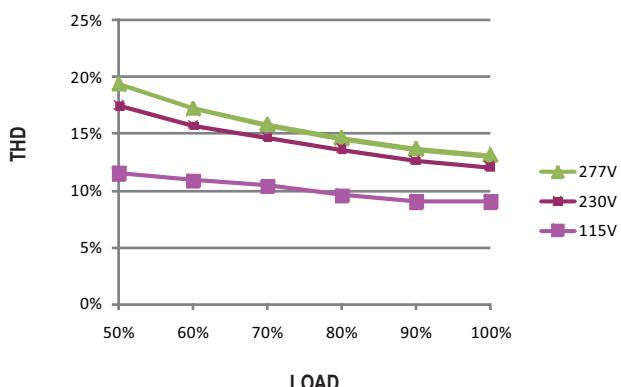

■ EFFICIENCY vs LOAD

HBG-100P series possess superior working efficiency that up to 91.5% can be reached in field applications.

※ 60V Model

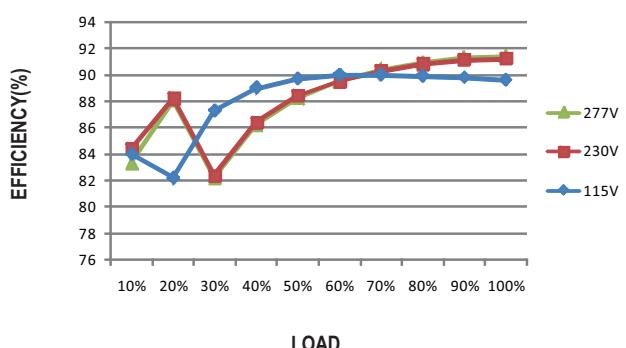





100W Constant Current Mode LED Driver



HBG-100P series

■ MECHANICAL SPECIFICATION

※ A-type

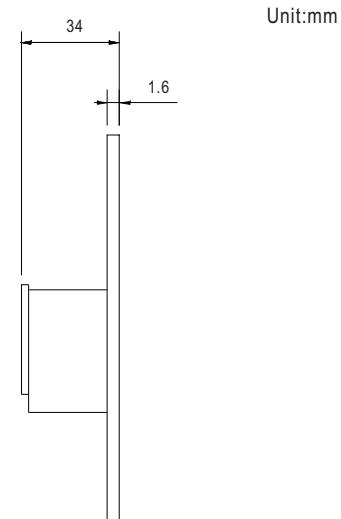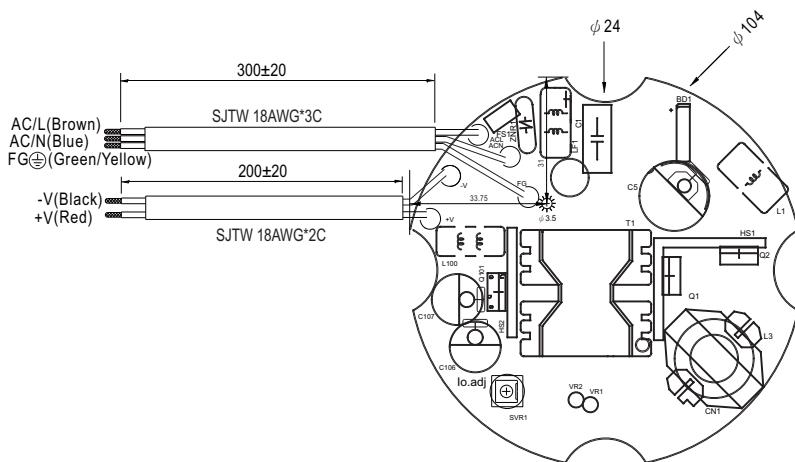

※ B/DA type

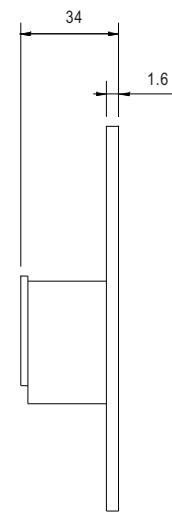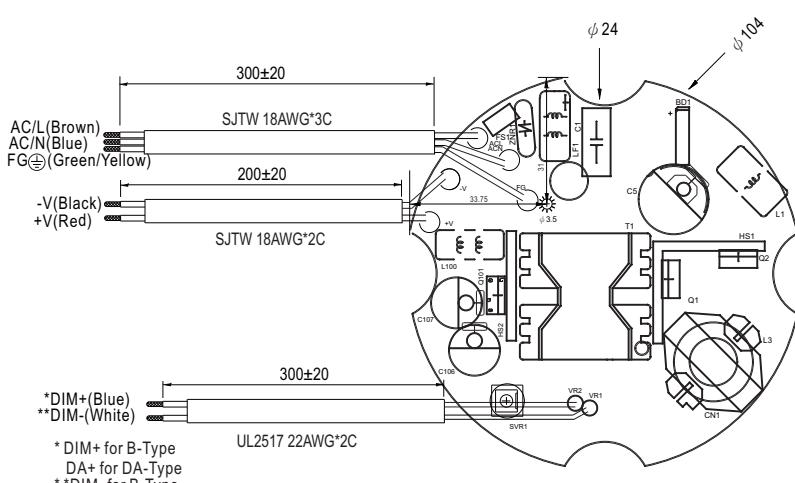

* DIM+(Blue)
**DIM-(White)
* DIM+ for B-Type
DA+ for DA-Type
* **DIM- for B-Type
DA- for DA-Type