



5W High Reliable Green Medical Encapsulated Type

MPM-05 series



ANSI/AAMI ES60601-1 BS EN/EN60601-1 IEC60601-1 TPTC004



■ Features

- 1.8"x1" compact size
- Medical safety approved (2 x MOPP) according to ANSI/AAMI ES60601-1 and IEC/BS EN/EN60601-1
- Suitable for BF application with appropriate system consideration
- No load power consumption<0.075W
- Extremely low leakage current
- Wide operating temp. range -40 ~ +85°C
- EMI class B for class II configuration
- Protections:
Short circuit / Overload / Over voltage / Over temperature
- No minimum load required
- Typical lifetime > 48K hours
- 3 years warranty

■ Applications


- Portable medical device
- Mobile clinical workstation
- Medical computer monitor
- Medical examination instrument

■ Description

MPM-05 is a 5W high density and small size (45.7*25.4*21.5mm) AC/DC module type medical grade power supply series offered in pin type. It features the operation for 80~264VAC, a low no load power consumption less than 0.075W, a high efficiency up to 82%, Class II (no FG) double insulation, outstanding dissipation and high lifespan thanks to the interior potting, 5G anti-vibration, high EMC performance, 4KVAC isolation, etc.

The design observes IEC/BS EN/EN60601-1 and ANSI/AAMI ES60601-1 version three with 2xMOPP level and ultra-low leakage current (<80 μ A). It is very suitable for BF (patient contact) type medical device or relevant equipment.

■ Model Encoding

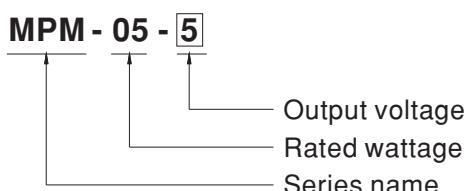

SPECIFICATION


MODEL	MPM-05-3.3	MPM-05-5	MPM-05-12	MPM-05-15	MPM-05-24
OUTPUT	DC VOLTAGE	3.3V	5V	12V	15V
	RATED CURRENT	1.25A	1A	0.42A	0.33A
	CURRENT RANGE	Note.2 0 ~ 1.25A	0 ~ 1A	0 ~ 0.42A	0 ~ 0.33A
	PEAK CURRENT	1.38A	1.1A	0.46A	0.36A
	RATED POWER	4.1W	5W	5W	5.5W
	PEAK LOAD(10sec.)	Note.3 4.6W	5.5W	5.5W	5.4W
	RIPPLE & NOISE (max.)	Note.4 100mVp-p	100mVp-p	150mVp-p	150mVp-p
	VOLTAGE TOLERANCE	Note.5 $\pm 2.5\%$	$\pm 2.5\%$	$\pm 2.5\%$	$\pm 2.5\%$
	LINE REGULATION	$\pm 0.3\%$	$\pm 0.3\%$	$\pm 0.3\%$	$\pm 0.3\%$
	LOAD REGULATION	$\pm 0.5\%$	$\pm 0.5\%$	$\pm 0.5\%$	$\pm 0.5\%$
INPUT	SETUP, RISE TIME	1000ms, 30ms/230VAC	1000ms, 30ms/115VAC at full load		
	HOLD UP TIME (Typ.)	40ms/230VAC	12ms/115VAC at full load		
PROTECTION	VOLTAGE RANGE	Note.6 80 ~ 264VAC			
	FREQUENCY RANGE	47 ~ 440Hz			
	EFFICIENCY (Typ.)	74%	78%	80%	81%
	AC CURRENT (Typ.)	0.2A/115VAC	0.1A/230VAC		
	INRUSH CURRENT (Typ.)	COLD START 25A/115VAC	45A/230VAC		
ENVIRONMENT	LEAKAGE CURRENT (max.)	Note.7 Touch current <80 μ A/264VAC			
	OVERLOAD	110% ~ 180% rated output power			
		Protection type : Hiccup mode, recovers automatically after fault condition is removed			
	OVER VOLTAGE	3.8 ~ 5V	5.8 ~ 6.8V	13.8 ~ 16.2V	17.3 ~ 20.3V
SAFETY & EMC (Note 9)	OVER TEMPERATURE	Protection type : Shut down o/p voltage, recovers automatically after temperature goes down			
	WORKING TEMP.	-40 ~ +85°C (Refer to "Derating Curve")			
	WORKING HUMIDITY	20 ~ 90% RH non-condensing			
	STORAGE TEMP., HUMIDITY	-40 ~ +100°C, 10 ~ 95% RH non-condensing			
	TEMP. COEFFICIENT	$\pm 0.03\%/\text{°C}$ (0 ~ 60°C)			
	SOLDERING TEMPERATURE	260°C $\pm 5\text{°C}$ /10sec.max.			
	VIBRATION	10 ~ 500Hz, 5G 10min./1cycle, period for 60min. each along X, Y, Z axes			
OTHERS	LEAD TEMPERATURE	260 $\pm 5\text{°C}$, 5s (max.)			
	OPERATING ALTITUDE	Note.8 5000 meters			
	SAFETY STANDARDS	IEC60601-1, BS EN/EN60601-1, EAC TP TC 004, UL ANSI/AAMI ES60601-1(3.1 version), CAN/CSA-C22 3 rd Edition approved ; Design refer to BS EN/EN60335-1(by request)			
	ISOLATION LEVEL	Primary-Secondary: 2xMOPP			
	WITHSTAND VOLTAGE	I/P-O/P:4KVAC			
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH			
	EMC EMISSION	Parameter	Standard	Test Level / Note	
		Conducted	BS EN/EN55011 (CISPR11)	Class B	
		Radiated	BS EN/EN55011 (CISPR11)	Class B	
		Harmonic Current	BS EN/EN61000-3-2	Class A	
	EMC IMMUNITY	Voltage Flicker	BS EN/EN61000-3-3	-----	
		BS EN/EN60601-1-2			
		Parameter	Standard	Test Level / Note	
		ESD	BS EN/EN61000-4-2	Level 4, 15KV air ; Level 4, 8KV contact	
		RF field susceptibility	BS EN/EN61000-4-3	Level 3, 10V/m(80MHz~2.7GHz) Table 9, 9~28V/m(385MHz~5.78GHz)	
		EFT bursts	BS EN/EN61000-4-4	Level 3, 2KV	
		Surge susceptibility	BS EN/EN61000-4-5	Level 3, 1KV/Line-Line	
		Conducted susceptibility	BS EN/EN61000-4-6	Level 3, 10V	
		Magnetic field immunity	BS EN/EN61000-4-8	Level 4, 30A/m	
		Voltage dip, interruption	BS EN/EN61000-4-11	100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods	
NOTE	MTBF	1799.5Khrs min. MIL-HDBK-217F (25°C)			
	DIMENSION	45.7*25.4*21.5mm (L*W*H) or 1.8*1.0*0.85" inch			
	PACKING	0.035Kg; 270pcs/10.5Kg/0.94CUFT			
NOTE	1.	All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.			
	2.	No minimum load required.			
	3.	33% Duty cycle maximum within every 30 seconds. Average output power should not exceed the rated power			
	4.	Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μ f & 47 μ f parallel capacitor.			
	5.	Tolerance : includes set up tolerance, line regulation and load regulation.			
	6.	Derating may be needed under low input voltages. Please check the derating curve for more details.			
	7.	Touch current was measured from primary input to DC output.			
	8.	The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).			
	9.	The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)			
	※	Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx			




5W High Reliable Green Medical Encapsulated Type

MPM-05 series


■ Block Diagram

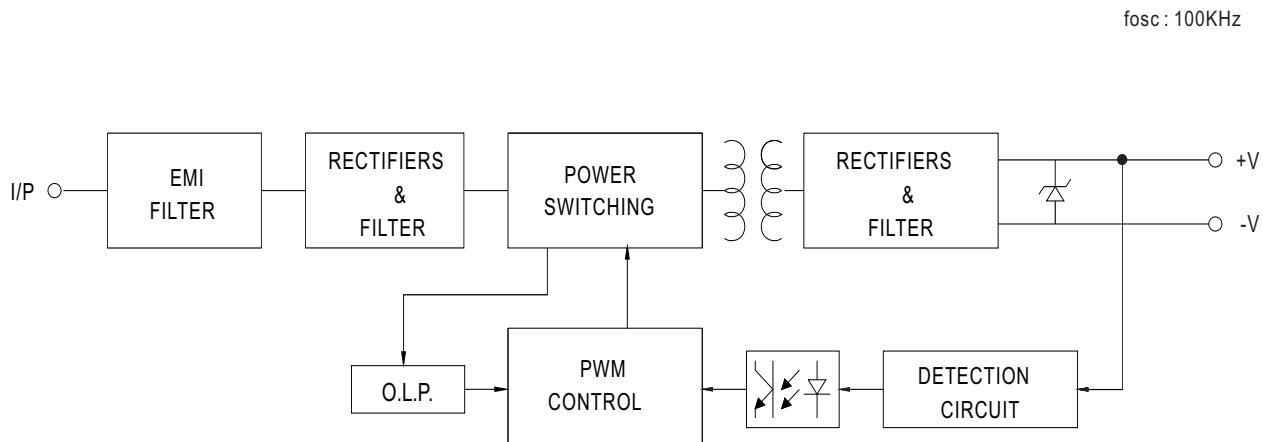

■ Derating Curve

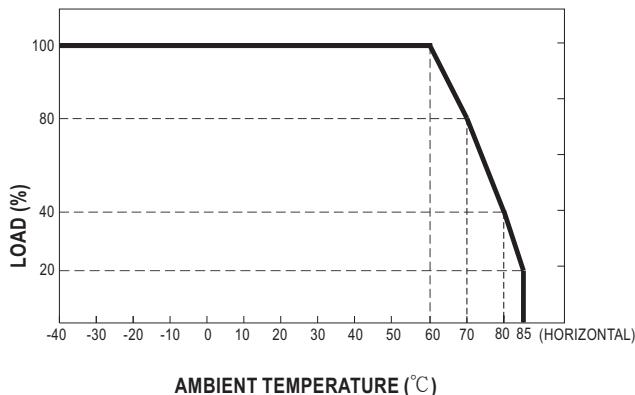


■ Output Derating VS Input Voltage

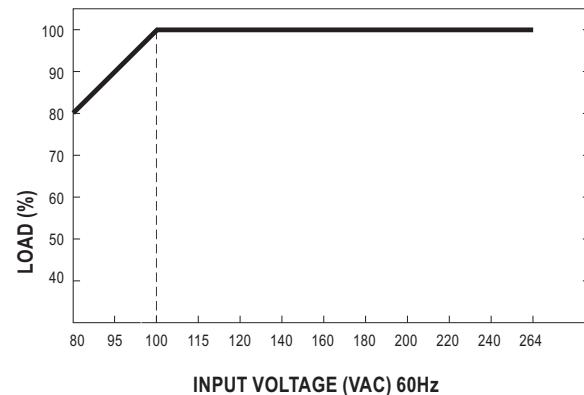

■ Mechanical Specification

Case No.222A Unit:(mm)

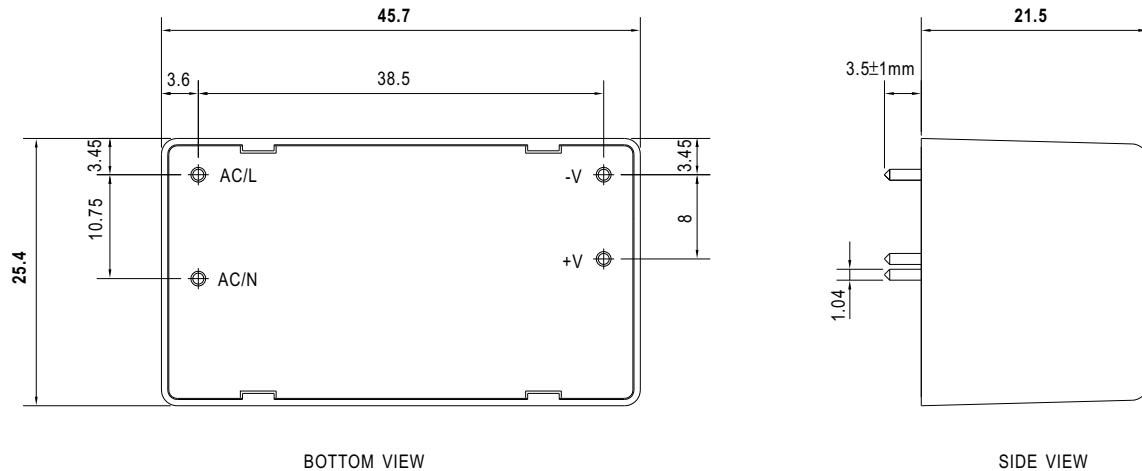**■ Installation Manual**

Please refer to : <http://www.meanwell.com/manual.html>