



15W High Reliable Green Medical Encapsulated Type

**MPM-15** series



BS EN/EN60335-1 ANSI/AAMI ES60601-1 BS EN/EN60601-1 IEC60601-1 TPTC004

## ■ Features

- 2.06"x1.07" compact size
- Medical safety approved (2 x MOPP) according to ANSI/AAMI ES60601-1 and IEC/BS EN/EN60601-1
- Suitable for BF application with appropriate system consideration
- No load power consumption<0.1W
- Extremely low leakage current
- Wide operating temp. range -40 ~ +85°C
- EMI class B for class II configuration
- Protections:
  - Short circuit / Overload / Over voltage / Over temperature
- No minimum load required
- 3 years warranty


## ■ Applications

- Portable medical device
- Mobile clinical workstation
- Medical computer monitor
- Medical examination instrument

## ■ Description

MPM-15 is a 15W high density and small size (52.4\*27.2\*24mm) AC/DC module type medical power supply series offered in pin type. It features the operation for 80~264VAC, a low no load power consumption less than 0.1W, a high efficiency up to 87%, Class II (no FG) double insulation, outstanding dissipation and high lifespan thanks to the interior potting, 2G anti-vibration, high EMC performance, 4KVAC isolation, etc. The design observes IEC/BS EN/EN60601-1 and ANSI/AAMI ES60601-1 version three with 2xMOPP level and ultra-low leakage current (<80  $\mu$  A). It is very suitable for BF (patient contact) type medical device or relevant equipment.

## ■ Model Encoding

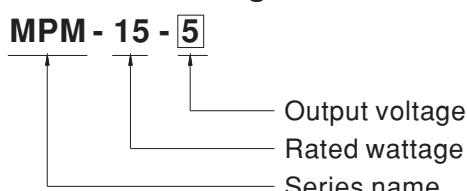

**SPECIFICATION**


MODEL	MPM-15-3.3	MPM-15-5	MPM-15-12	MPM-15-15	MPM-15-24					
OUTPUT	DC VOLTAGE	3.3V	5V	12V	15V					
	RATED CURRENT	3.5A	3A	1.25A	1A					
	CURRENT RANGE Note.2	0 ~ 3.5A	0 ~ 3A	0 ~ 1.25A	0 ~ 1A					
	PEAK CURRENT	3.85A	3.3A	1.38A	1.1A					
	RATED POWER	11.6W	15W	15W	15.1W					
	PEAK LOAD(10sec.) Note.3	12.7W	16.5W	16.6W	16.6W					
	RIPLPE & NOISE (max.) Note.4	150mVp-p	150mVp-p	150mVp-p	180mVp-p					
	VOLTAGE TOLERANCE Note.5	±2.0%	±2.0%	±2.0%	±2.0%					
	LINE REGULATION	±0.5%	±0.5%	±0.3%	±0.3%					
	LOAD REGULATION	±0.5%	±0.5%	±0.5%	±0.5%					
INPUT	SETUP, RISE TIME	1500ms, 30ms/230VAC	1500ms, 30ms/115VAC at full load							
	HOLD UP TIME (Typ.)	40ms/230VAC	10ms/115VAC at full load							
PROTECTION	VOLTAGE RANGE Note.6	80 ~ 264VAC	113V~370VDC							
	FREQUENCY RANGE	47 ~ 440Hz								
	EFFICIENCY (Typ.)	83.5%	85.5%	86.5%	87%					
	AC CURRENT (Typ.)	0.6A/115VAC	0.3A/230VAC							
	INRUSH CURRENT (Typ.)	COLD START	20A/115VAC	45A/230VAC						
ENVIRONMENT	LEAKAGE CURRENT (max.) Note.7	Touch current <80µA/264VAC								
	OVERLOAD	110% ~ 150% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed								
	OVER VOLTAGE	3.8 ~ 5V	5.8~ 6.8V	13.8 ~ 16.2V	17.3 ~ 20.3V					
	OVER TEMPERATURE	Protection type : Shut off o/p voltage, clamping by zener diode								
SAFETY & EMC (Note.9)	WORKING TEMP.	-40 ~ +85°C (Refer to "Derating Curve")								
	WORKING HUMIDITY	20 ~ 90% RH non-condensing								
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH non-condensing								
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 60°C)								
	SOLDERING TEMPERATURE	260°C ±5°C/10sec.max.								
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes								
SAFETY & EMC (Note.9)	LEAD TEMPERATURE	260±5°C, 5s (max.)								
	OPERATING ALTITUDE Note.8	5000 meters								
	SAFETY STANDARDS	IEC60601-1, BS EN/EN60601-1, IEC60335-1, BS EN/EN60335-1, EAC TP TC 004, UL ANSI/AAMI ES60601-1(3.1 version), CAN/CSA-C22 3 <sup>rd</sup> Edition approved								
	ISOLATION LEVEL	Primary-Secondary: 2xMOPP								
	WITHSTAND VOLTAGE	I/P-O/P:4KVAC								
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH								
	EMC EMISSION	Parameter	Standard	Test Level / Note						
		Conducted emission	BS EN/EN55011 (CISPR11)	Class B						
		Radiated emission	BS EN/EN55011 (CISPR11)	Class B						
		Harmonic current	BS EN/EN61000-3-2	Class A						
	EMC IMMUNITY	Voltage flicker	BS EN/EN61000-3-3	-----						
		BS EN/EN60601-1-2								
		Parameter	Standard	Test Level / Note						
		ESD	BS EN/EN61000-4-2	Level 4, 15KV air ; Level 4, 8KV contact						
		RF field susceptibility	BS EN/EN61000-4-3	Level 3, 10V/m( 80MHz~2.7GHz ) Table 9, 9~28V/m( 385MHz~5.78GHz )						
		EFT bursts	BS EN/EN61000-4-4	Level 3, 2KV						
		Surge susceptibility	BS EN/EN61000-4-5	Level 3, 1KV/Line-Line						
		Conducted susceptibility	BS EN/EN61000-4-6	Level 3, 10V						
OTHERS	Magnetic field immunity	BS EN/EN61000-4-8	Level 4, 30A/m							
	Voltage dip, interruption	BS EN/EN61000-4-11	100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods							
	MTBF	1210Khrs min. MIL-HDBK-217F (25°C)								
NOTE	DIMENSION	52.4*27.2*24mm (L*W*H) or 2.06"**1.07"**0.94" inch								
	PACKING	0.056Kg; 240pcs/14.4Kg/0.94CUFT								
NOTE	1.	All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.								
	2.	No minimum load required.								
	3.	33% Duty cycle maximum within every 30 seconds. Average output power should not exceed the rated power.								
	4.	Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 µf & 47 µf parallel capacitor.								
	5.	Tolerance : includes set up tolerance, line regulation and load regulation.								
	6.	Derating may be needed under low input voltages. Please check the derating curve for more details.								
	7.	Touch current was measured from primary input to DC output.								
	8.	The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).								
	9.	The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="http://www.meanwell.com">http://www.meanwell.com</a> )								
	※	Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a>								




15W High Reliable Green Medical Encapsulated Type

**MPM-15 series**


■ Block Diagram

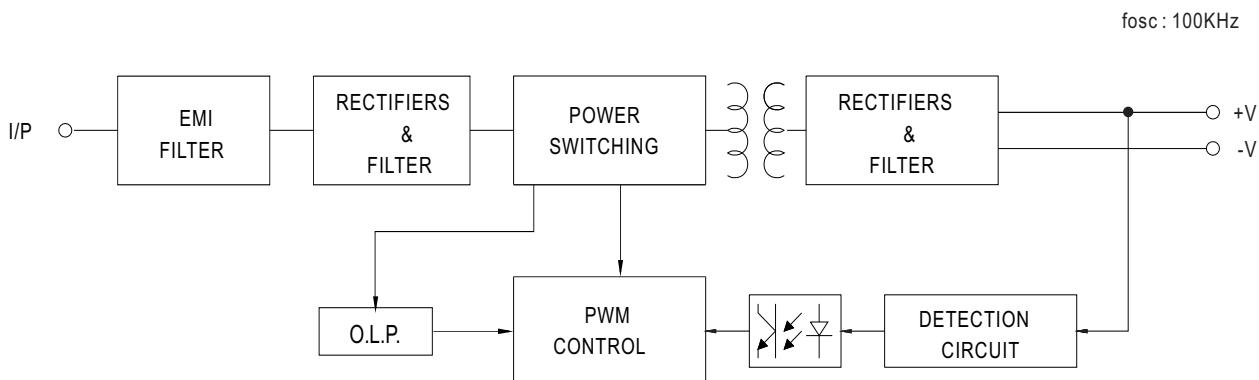

■ Derating Curve

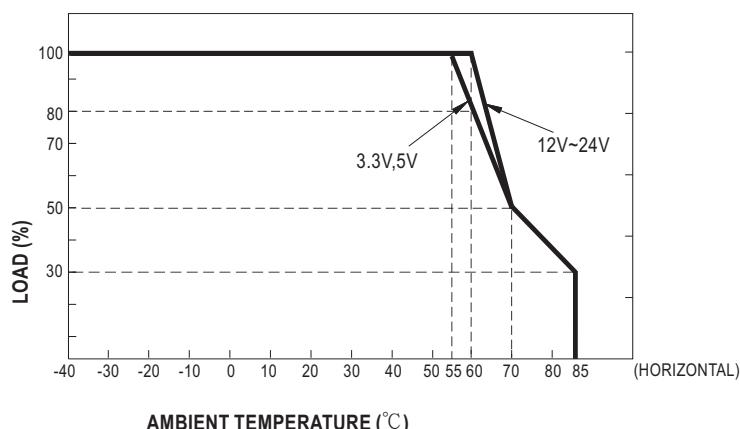


■ Output Derating VS Input Voltage

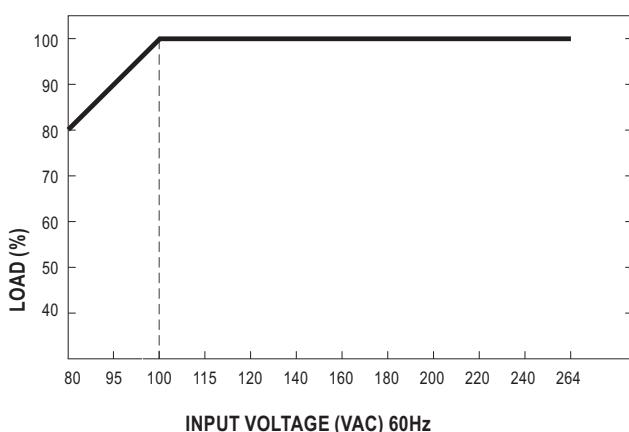

**■ Mechanical Specification**

Case No.219A Unit:(mm)

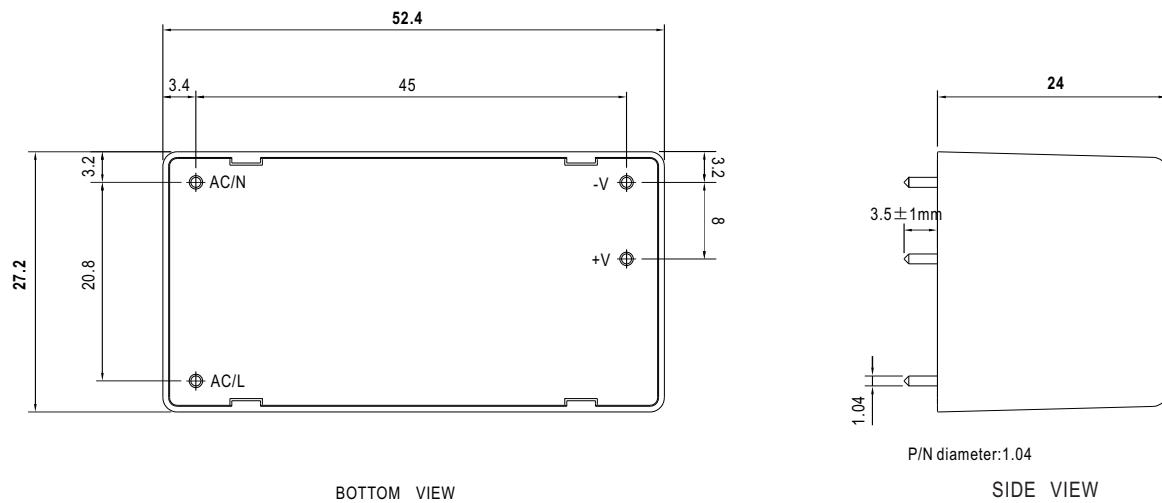

BOTTOM VIEW

SIDE VIEW

**■ Installation Manual**Please refer to : <http://www.meanwell.com/manual.html>