



25W Single Output LED Power Supply

PLM-25 series



BS EN/EN61347-1,-2-13

■ Features

- 230VAC only or Full range (up to 295VAC) models available
- Built-in active PFC function
- Constant current design
- Protections: Short circuit
- Cooling by free air convection
- Fully isolated plastic case
- Class II power unit, no FG
- Class 2 power unit (for PLM-25-500/700/1050)
- No load power consumption <0.5W
- High reliability, low cost
- 2 years warranty

■ Applications


- Indoor LED lighting
- LED office lighting
- LED commercial lighting
- LED decorative lighting

■ Description

PLM-25 is a 25W economical AC/DC LED power supply series. Incorporating a built-in active PFC design, PLM-25 provides a high Power Factor value greater than 0.9. In addition, with the low no load power consumption below 0.5W, and the setup time less than 500ms, PLM-25 is complied with the ErP regulation required by European Union for lighting fixtures.

PLM-25 is a class II (without FG pin) power unit housed with the UL 94V-0 rated flame retardant plastic case. The I/O terminals are designed with screw-less clamp style terminal block that greatly simplifies the wiring installation. Two types of models with different input voltage range are offered: PLM-25 series, which operates from 110~295VAC, and PLM-25E series, which operates from 180~295VAC. These two series are both constant current output design, supplying models with the current of 350mA, 500mA, 700mA and 1050mA, respectively.

■ Model Encoding

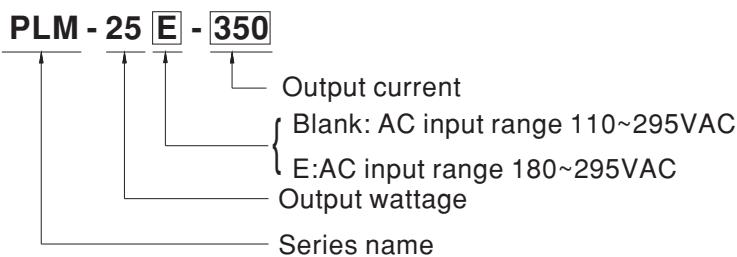



25W Single Output LED Power Supply

PLM-25 series

SPECIFICATION

MODEL	PLM-25□-350	PLM-25□-500	PLM-25□-700	PLM-25□-1050	
OUTPUT	CONSTANT CURRENT REGION Note.5	42 ~ 72V	30 ~ 50V	21 ~ 36V	
	RATED CURRENT	0.35A	0.5A	0.7A	
	NO LOAD OUTPUT VOLTAGE(max.)	80V	56V	42V	
	RATED POWER	25.2W	25W	25.2W	
	RIPPLE & NOISE (max.) Note.2	Blank type 7.2Vp-p E type 9Vp-p	5.0Vp-p 7.5Vp-p	3.6Vp-p 5.4Vp-p	
	CURRENT ACCURACY Note.3	±5.0%			
	SETUP TIME	Blank type: 500ms / 115VAC, 230VAC at full load; E type: 500ms / 230VAC at full load			
INPUT	VOLTAGE RANGE Note.4	Blank type: 110 ~ 295VAC 156 ~ 417VDC; E type: 180 ~ 295VAC 254 ~ 417VDC			
	FREQUENCY RANGE	47 ~ 63Hz			
	POWER FACTOR	Blank type	PF ≥ 0.97/115VAC, PF ≥ 0.95/230VAC, PF > 0.9/277VAC (at full load) (Please refer to "Power Factor Characteristic" curve)		
		E type	PF ≥ 0.95/230VAC, PF ≥ 0.9/277VAC (at full load) (Please refer to "Power Factor Characteristic" curve)		
	TOTAL HARMONIC DISTORTION	Blank type	THD < 20% when output loading ≥ 60% at 115VAC/230VAC input and output loading ≥ 75% at 277VAC input		
		E type	THD < 20% when output loading ≥ 60% at 230VAC input and output loading ≥ 75% at 277VAC input		
	EFFICIENCY (Typ.)	Blank type	87%	86%	86%
		E type	86%	85%	85%
	AC CURRENT	Blank type: 0.3A/115VAC 0.15A/230VAC 0.12A/277VAC; E type: 0.15A/230VAC 0.12A/277VAC			
	INRUSH CURRENT(Typ.)	COLD START 15A(twidth=50μs measured at 50% Ipeak) at 230VAC			
PROTECTION	MAX. No. of PSUs on 16A CIRCUIT BREAKER	80 units (circuit breaker of type B) / 80 units (circuit breaker of type C) at 230VAC			
	LEAKAGE CURRENT	0.25mA / 240VAC			
ENVIRONMENT	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed.			
SAFETY & EMC	WORKING TEMP.	-30 ~ +45°C			
	WORKING HUMIDITY	20 ~ 90% RH non-condensing			
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH			
	TEMP. COEFFICIENT	±0.06%/°C (0 ~ 50°C)			
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes			
OTHERS	SAFETY STANDARDS	UL8750, CSA C22.2 No. 250.13-12(for Blank type only); ENEC BS EN/EN61347-1, BS EN/EN61347-2-13, BS EN/EN62384, GB19510.14, GB19510.1(for E type only), EAC TP TC 004, IP30 approved			
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC			
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms/500VDC / 25°C/ 70%RH			
	EMC EMISSION	Compliance to BS EN/EN55015, GB17743, GB17625.1(for E type only), BS EN/EN61000-3-2 Class C (≥60% load); BS EN/EN61000-3-3, EAC TP TC 020			
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level, criteria B(surge 2KV), EAC TP TC 020			
NOTE	MTBF	808.162Khrs min. MIL-HDBK-217F (25°C)			
	DIMENSION	145*38*22mm (L*W*H)			
	PACKING	0.126Kg; 60pcs/8.6 Kg/0.48CUFT			
1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Please see "AC input voltage drop vs. output current characteristics" table. 4. Derating may be needed under low input voltage, please check the static characteristic for more details. 5. Constant current operation region is within 60% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design. 6. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 7. Direct connecting to LEDs is suggested, but is not suitable for using additional drivers. ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx					




25W Single Output LED Power Supply

PLM-25 series

■ Mechanical Specification

Case No.PLM-25 Unit:mm

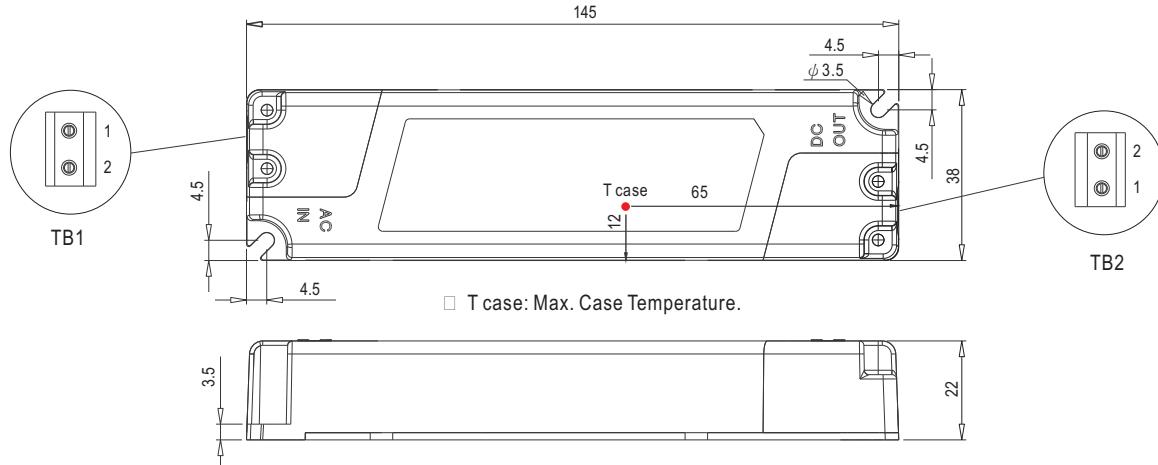

NOTE: The input and output line for using UL1015 18AWG*2C is suggested


Terminal Pin No. Assignment (TB1) :
SWITCHLAB MWX201-75002EB(GRAY)

Pin No.	Assignment
1	AC/L
2	AC/N


Terminal Pin No. Assignment (TB2) :
SWITCHLAB MWX201-75002B(BLUE)

Pin No.	Assignment
1	+V
2	-V


■ Block Diagram




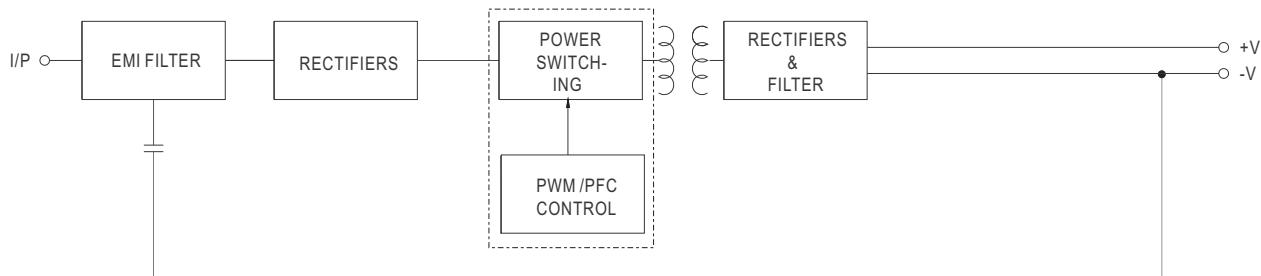


■ Derating Curve

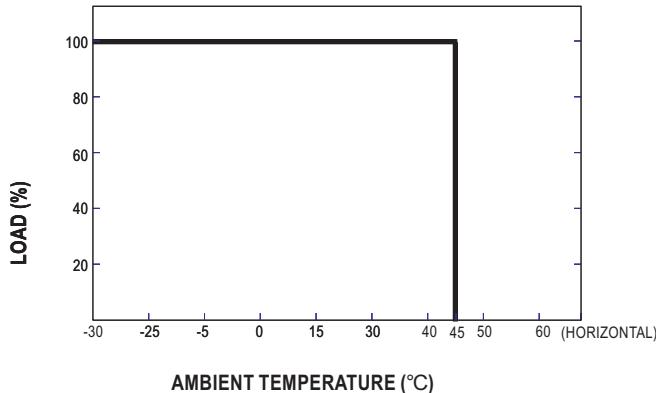

■ Static Characteristics

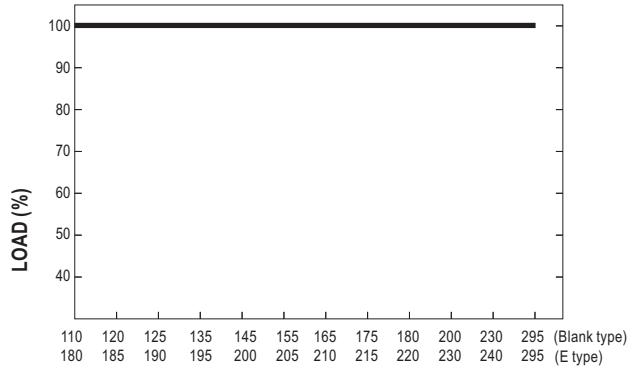

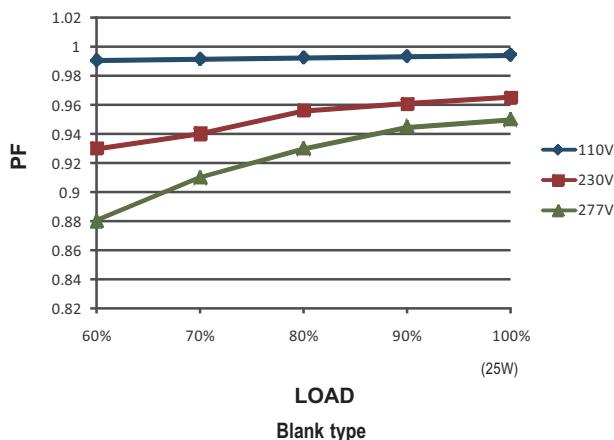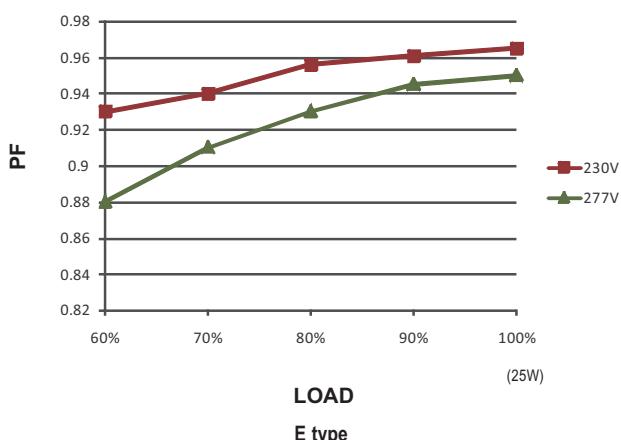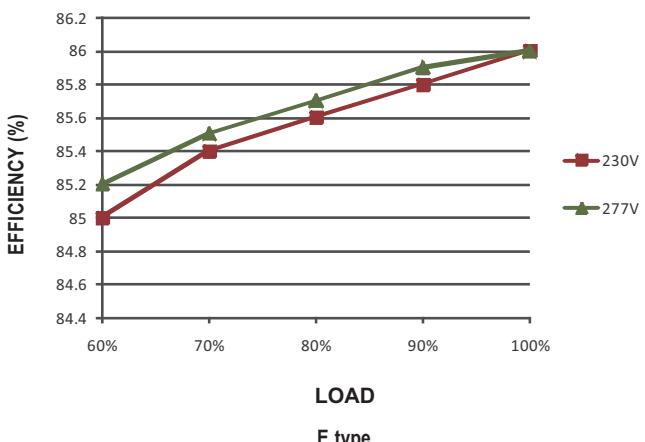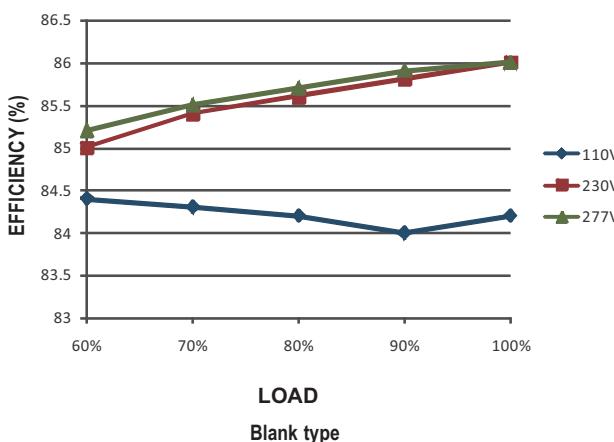■ Power Factor Characteristic
Constant Current Mode

Constant Current Mode

■ EFFICIENCY vs LOAD (500mA Model)

■ AC input voltage drop vs. output current characteristics

AC input drop	10%	8%	5%	3%
Io drop	<16%	<12%	<8%	<7%

NOTE: Output current will return to the rated value within 50ms