



35W Dual Output Switching Power Supply

RD-35 series



■ Features :

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- LED indicator for power on
- 100% full load burn-in test
- All using 105°C long life electrolytic capacitors
- Withstand 300VAC surge input for 5 second
- High operating temperature up to 70°C
- Withstand 5G vibration test
- High efficiency, long life and high reliability
- 3 years warranty

User's Manual




us BS EN/EN62368-1 IEC62368-1 TPTC004

SPECIFICATION

MODEL	RD-35A		RD-35B		RD-3513										
OUTPUT	OUTPUT NUMBER	CH1	CH2	CH1	CH2	CH1	CH2								
	DC VOLTAGE	5V	12V	5V	24V	13.5V	-13.5V								
	RATED CURRENT	4A	1A	2.2A	1A	1.3A	1.3A								
	CURRENT RANGE	0 ~ 4A	0 ~ 1A	0 ~ 4A	0 ~ 1.3A	0 ~ 2A	0 ~ 1.5A								
	RATED POWER	32W		35W		35.1W									
	RIPPLE & NOISE (max.) Note.2	80mVp-p	120mVp-p	80mVp-p	120mVp-p	120mVp-p	120mVp-p								
	VOLTAGE ADJ. RANGE	CH1: 4.75 ~ 5.5V		CH1: 4.75 ~ 5.5V		CH1: 11.5 ~ 15.5V									
	VOLTAGE TOLERANCE Note.3	±2.0%	±6.0%	±2.0%	±5.0%	±4.0%	±4.0%								
	LINE REGULATION Note.4	±0.5%	±1.5%	±0.5%	±1.0%	±0.5%	±0.5%								
	LOAD REGULATION Note.5	±0.5%	±3.0%	±0.5%	±2.0%	±3.0%	±3.0%								
INPUT	SETUP, RISE TIME	500ms, 30ms/230VAC 1200ms, 30ms/115VAC at full load													
	HOLD UP TIME (Typ.)	80ms/230VAC 16ms/115VAC at full load													
PROTECTION	VOLTAGE RANGE	88 ~ 264VAC	125 ~ 373VDC (Withstand 300VAC surge for 5sec. Without damage)												
	FREQUENCY RANGE	47 ~ 63Hz													
	EFFICIENCY (Typ.)	79%		80%	80%										
	AC CURRENT (Typ.)	0.8A/115VAC	0.55A/230VAC												
	INRUSH CURRENT (Typ.)	COLD START 45A/230VAC													
ENVIRONMENT	LEAKAGE CURRENT	<2mA / 240VAC													
	OVERLOAD	110 ~ 150% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed													
	OVER VOLTAGE	CH1: 5.75 ~ 6.75V		CH1: 16.87 ~ 19.57V											
		Protection type : Hiccup mode, recovers automatically after fault condition is removed													
SAFETY & EMC (Note 6)	WORKING TEMP.	-25 ~ +70°C (Refer to "Derating Curve")													
	WORKING HUMIDITY	20 ~ 90% RH non-condensing													
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH													
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)on CH1 output													
	VIBRATION	10 ~ 500Hz, 5G 10min./1cycle, period for 60min. each along X, Y, Z axes													
OTHERS	SAFETY STANDARDS	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved													
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC	I/P-FG:2KVAC	O/P-FG:0.5KVAC											
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH													
	EMC EMISSION	Compliance to BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2,-3, EAC TP TC 020													
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN61000-6-2 (BS EN/EN50082-2), heavy industry level, criteria A, EAC TP TC 020													
NOTE	MTBF	179Khrs min. MIL-HDBK-217F (25°C)													
	DIMENSION	99*82*36mm (L*W*H)													
	PACKING	0.3Kg; 45pcs/14Kg/0.76CUFT													
1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. (In order to meet tolerance, it is recommended that CH1 load >15% rated current for A type and CH1 load > 10% rated current for B type.) 4. Line regulation is measured from low line to high line at rated load. 5. Load regulation is measured from 0% to 100% rated load. 6. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) 7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx															

■ Mechanical Specification


Case No. 932A Unit:mm

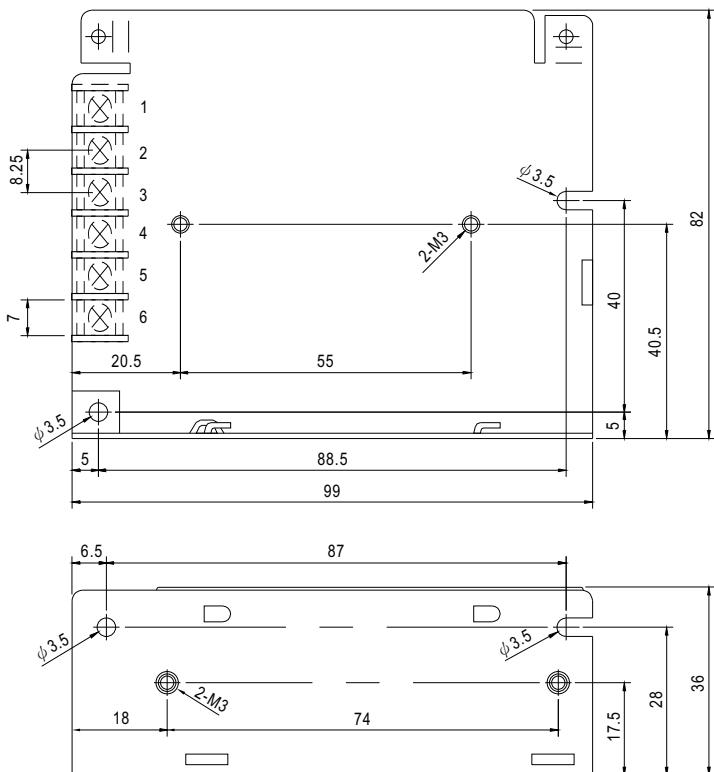


Terminal Pin No. Assignment

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	4	DC OUTPUT V2
2	AC/N	5	DC OUTPUT COM
3	FG \pm	6	DC OUTPUT V1

■ Block Diagram

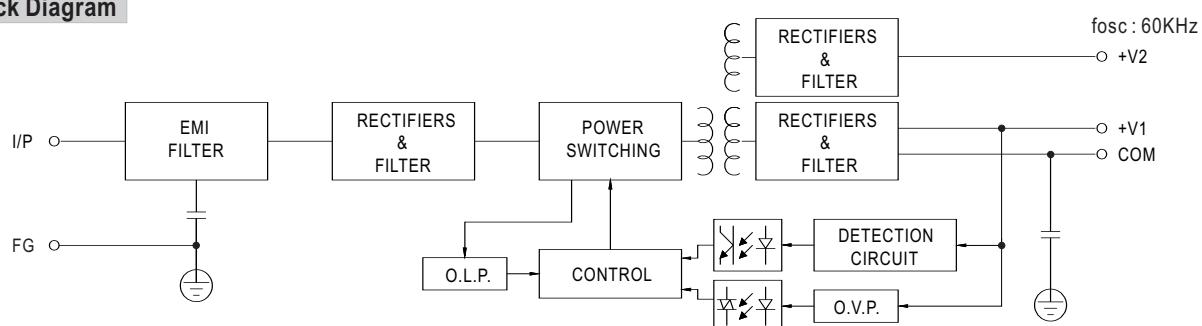

■ Derating Curve

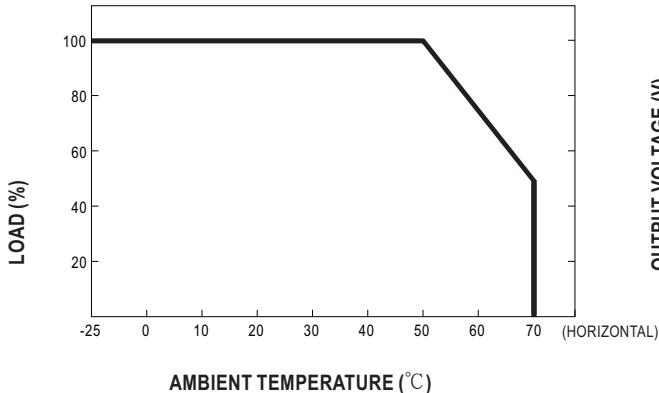

■ Static Characteristics (A)

