



## 65W Dual Output Switching Power Supply

## RID-65 series



## ■ Features :

- Isolated output & GND for CH1,CH2
- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- LED indicator for power on
- 100% full load burn-in test
- All using 105°C long life electrolytic capacitors
- Withstand 300VAC surge input for 5 second
- High operating temperature up to 70°C
- Withstand 5G vibration test
- High efficiency, long life and high reliability
- 3 years warranty

User's Manual




## SPECIFICATION

| MODEL                    | RID-65A   |  | RID-65B  |                                  |
|--------------------------|---|--|--|----------------------------------|
| OUTPUT                   | OUTPUT NUMBER   | CH1  | CH2  | CH1                              |
|                          | DC VOLTAGE  | 5V   | 12V  | 5V                               |
|                          | RATED CURRENT   | 6A   | 3A   | 4A                               |
|                          | CURRENT RANGE   | Note.6 0 ~ 8A  | 0 ~ 4A   | 0 ~ 8A                           |
|                          | RATED POWER   | Note.6 66W   |  | 68W                              |
|                          | RIPPLE & NOISE (max.)   | Note.2 80mVp-p   | 120mVp-p   | 80mVp-p                          |
|                          | VOLTAGE ADJ. RANGE  | CH1: 4.75 ~ 5.5V   |  | CH1: 4.75 ~ 5.5V                 |
|                          | VOLTAGE TOLERANCE   | Note.3 $\pm 2.0\%$   | $\pm 8.0\%$  | $\pm 2.0\%$                      |
|                          | LINE REGULATION   | Note.4 $\pm 0.5\%$   | $\pm 1.5\%$  | $\pm 0.5\%$                      |
|                          | LOAD REGULATION   | Note.5 $\pm 0.5\%$   | $\pm 5.0\%$  | $\pm 0.5\%$                      |
| INPUT                    | SETUP, RISE TIME  | 500ms, 20ms/230VAC   |  | 1200ms, 30ms/115VAC at full load |
|                          | HOLD UP TIME (Typ.)   | 50ms/230VAC 12ms/115VAC at full load   |  |                                  |
|                          | VOLTAGE RANGE   | 88 ~ 264VAC  | 125 ~ 373VDC (Withstand 300VAC surge for 5sec. Without damage) |                                  |
|                          | FREQUENCY RANGE   | 47 ~ 63Hz  |  |                                  |
|                          | EFFICIENCY(Typ.)  | 80%  |  | 81%                              |
|                          | AC CURRENT (Typ.)   | 2A/115VAC  | 1.2A/230VAC  |                                  |
| PROTECTION               | INRUSH CURRENT (Typ.)   | COLD START 50A/230VAC  |  |                                  |
|                          | LEAKAGE CURRENT   | <2mA / 240VAC  |  |                                  |
|                          | OVERLOAD  | 110 ~ 150% rated output power<br>Protection type : Hiccup mode, recovers automatically after fault condition is removed            |  |                                  |
|                          | OVER VOLTAGE  | CH1: 5.75 ~ 6.75V<br>Protection type : Hiccup mode, recovers automatically after fault condition is removed                        |  |                                  |
| ENVIRONMENT              | WORKING TEMP.   | -25 ~ +70°C (Refer to "Derating Curve")  |  |                                  |
|                          | WORKING HUMIDITY  | 20 ~ 90% RH non-condensing   |  |                                  |
|                          | STORAGE TEMP., HUMIDITY   | -40 ~ +85°C, 10 ~ 95% RH   |  |                                  |
|                          | TEMP. COEFFICIENT   | $\pm 0.03\%/\text{°C}$ (0 ~ 50°C)on +5V output   |  |                                  |
|                          | VIBRATION   | 10 ~ 500Hz, 5G 10min./1cycle, period for 60min. each along X, Y, Z axes  |  |                                  |
| SAFETY & EMC<br>(Note 7) | SAFETY STANDARDS  | UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved   |  |                                  |
|                          | WITHSTAND VOLTAGE   | I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC  |  |                                  |
|                          | ISOLATION RESISTANCE  | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH   |  |                                  |
|                          | EMC EMISSION  | Compliance to BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2,-3, EAC TP TC 020   |  |                                  |
|                          | EMC IMMUNITY  | Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN61000-6-2 (BS EN/EN50082-2), heavy industry level, criteria A, EAC TP TC 020 |  |                                  |
| OTHERS                   | MTBF  | 265.9Khrs min. MIL-HDBK-217F (25°C)  |  |                                  |
|                          | DIMENSION   | 129*98*38mm (L*W*H)  |  |                                  |
|                          | PACKING   | 0.44Kg; 30pcs/14.2Kg/0.72CUFT  |  |                                  |
| NOTE                     | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.<br>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.<br>3. Tolerance : includes set up tolerance, line regulation and load regulation, when multi-channel output, it is recommended that CH1 load > 10%.<br>4. Line regulation is measured from low line to high line at rated load.<br>5. Load regulation is measured from 20% to 100% rated load, and other output at 60% rated load.<br>6. Each output can work within current range. But total output power can't exceed rated output power.<br>7. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="http://www.meanwell.com">http://www.meanwell.com</a> )<br>8. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).<br>※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a> |  |  |                                  |

## ■ Mechanical Specification



Case No. 903 Unit:mm

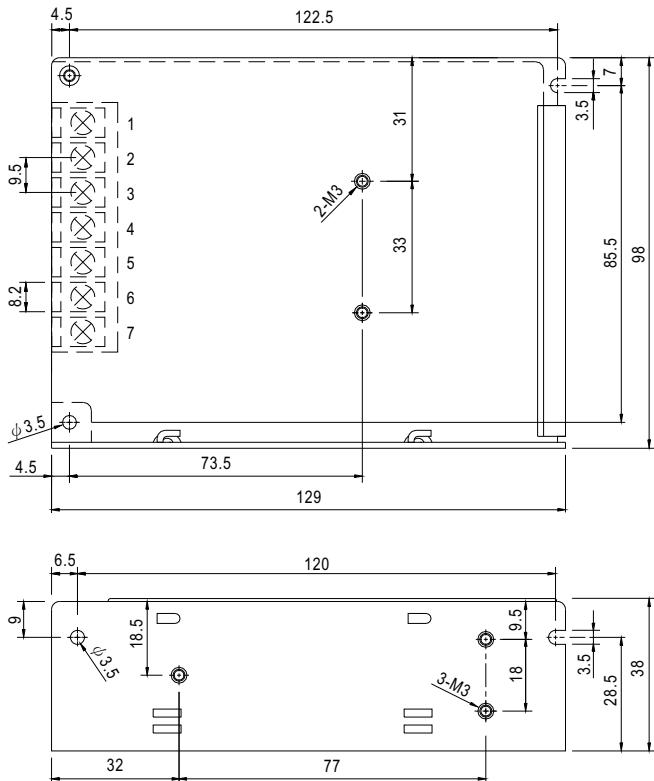


## Terminal Pin No. Assignment

| Pin No. | Assignment   | Pin No. | Assignment    |
|---------|--------------|---------|---------------|
| 1       | AC/L         | 5       | DC OUTPUT +V2 |
| 2       | AC/N         | 6       | DC OUTPUT G1  |
| 3       | FG $\pm$     | 7       | DC OUTPUT +V1 |
| 4       | DC OUTPUT G2 |         |               |

## ■ Block Diagram

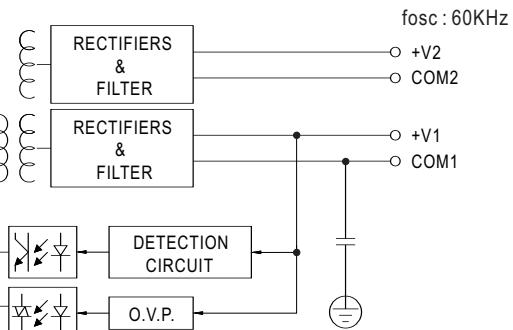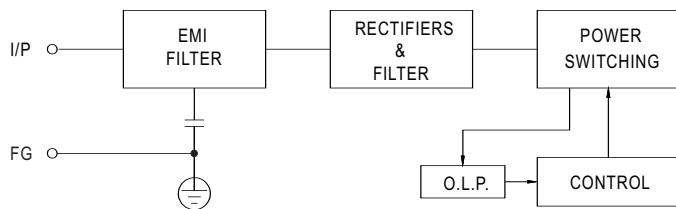

## ■ Derating Curve

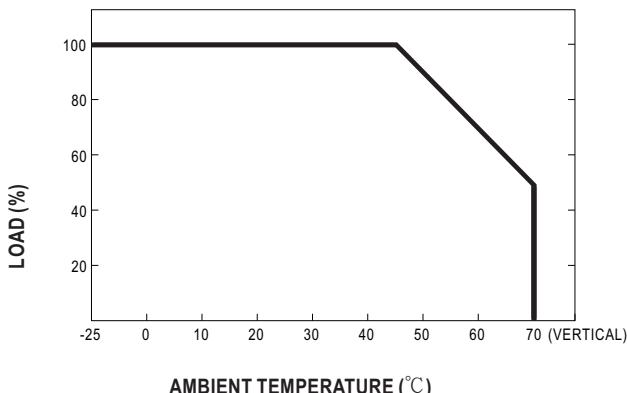

## ■ Output Derating VS Input Voltage

