



120W Reliable Green Medical Power Supply

RPS-120 series



ANSI/AAMI ES60601-1 BS EN/EN60601-1 IEC60601-1 TPTC004



■ Features

- 4"×2" compact size
- Medical safety approved (2 x MOPP) according to ANSI/AAMI ES60601-1 and IEC/BS EN/EN60601-1
- Suitable for BF application with appropriate system consideration
- 84W convention, 120W force air
- EMI Class B for both Class I (with FG) & Class II (no FG) configuration
- No load power consumption<0.3W
- Extremely low leakage current
- 12V/0.5A fan supply
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Operating altitude up to 4000 meters
- 3 years warranty


■ Applications

- Oral irrigator
- Hemodialysis machine
- Medical monitors
- Sleep apnea devices
- Pumps machine

■ Description

RPS-120 is a 120W highly reliable green PCB type medical power supply with a high power density on a 4" by 2" footprint. It accepts 80~264VAC input and offers various models with the output voltages between 12V and 48V. The working efficiency is up to 91% and the extremely low no load power consumption is down below 0.3W. RPS-120 is able to be used for both Class I (with FG) or Class II (no FG) system design. The extremely low leakage current is less than 150 μ A. In addition, it conforms to the international medical regulations (2*MOPP) and EMC BS EN/EN55011, perfectly fitting all kinds of BF rated "patient contact" medical system equipment.

■ Model Encoding

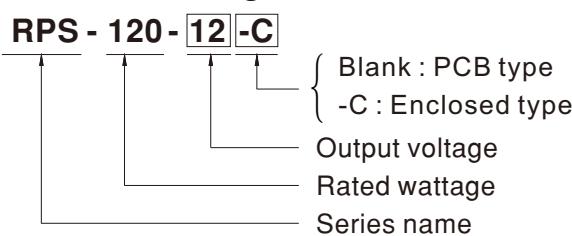


SPECIFICATION

MODEL	RPS-120-12		RPS-120-15		RPS-120-24		RPS-120-27		RPS-120-48		
OUTPUT	DC VOLTAGE	12V	15V	24V	27V		48V				
	CURRENT	10CFM	10A	8A	5A	4.5A	2.5A				
		Convection	7.0A	5.6A	3.5A	3.15A	1.75A				
	RATED POWER	10CFM	120W	120W	120W	121.5W	120W				
		Convection	84W	84W	84W	85W	84W				
	RIPPLE & NOISE (max.) Note.2	100mVp-p	120mVp-p	150mVp-p	150mVp-p	150mVp-p	150mVp-p				
	VOLTAGE ADJ. RANGE	11.4~12.6V	14.3~15.8V	22.8~25.2V	25.6~28.4V	45.6~50.4V					
	VOLTAGE TOLERANCE Note.3	±2.0%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%				
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
	LOAD REGULATION	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%				
INPUT	SETUP, RISE TIME	500ms, 30ms/230VAC	500ms, 30ms/115VAC at full load								
	HOLD UP TIME (Typ.)	50ms/230VAC	10ms/115VAC at full load								
	VOLTAGE RANGE Note.4	80~264VAC	113~370VDC								
	FREQUENCY RANGE	47~63Hz									
	EFFICIENCY (Typ.)	89%	89%	90%	90%	91%					
	AC CURRENT (Typ.)	2.1A/115VAC	1.2A/230VAC								
	INRUSH CURRENT (Typ.)	COLD START 30A/115VAC	60A/230VAC								
	LEAKAGE CURRENT(max.) Note.5	Earth leakage current < 150µA/264VAC, Touch current < 80µA/264VAC									
	OVERLOAD	115~150% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed									
	OVER VOLTAGE	13.2~15.6V	16.5~19.5V	26.4~31.2V	29.7~35V	52.8~62.4V					
PROTECTION	OVER TEMPERATURE	Protection type : Shut down o/p voltage, re-power on to recover									
	FUNCTION	FAN SUPPLY	12V@0.5A for driving a fan ; tolerance -15% ~ +10%								
	WORKING TEMP.	-30~+70°C (Refer to "Derating Curve")									
	WORKING HUMIDITY	20~90% RH non-condensing									
	STORAGE TEMP., HUMIDITY	-40~+85°C, 10~95% RH non-condensing									
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)									
	VIBRATION	10~500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes									
	OPERATING ALTITUDE Note.6	4000 meters									
	SAFETY STANDARDS	IEC60601-1, TUV BS EN/EN60601-1, EAC TP TC 004, UL ANSI / AAMI ES60601-1 (3.1 version), CAN/CSA-C22.2 No. 60601-1:14 - Edition 3 approved; Design refer to BS EN/EN60335-1									
	ISOLATION RESISTANCE	Primary-Secondary: 2xMOPP, Primary-Earth:1xMOPP, Secondary-Earth:1xMOPP									
SAFETY & EMC (Note 7)	WITHSTAND VOLTAGE	I/P-O/P:4KVAC	I/P-FG:2KVAC	O/P-FG:1.5KVAC							
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG:100M Ohms / 500VDC / 25°C / 70% RH									
	EMC EMISSION	Parameter	Standard	Test Level / Note							
		Conducted emission	BS EN/EN55011 (CISPR11)	Class B							
		Radiated emission	BS EN/EN55011 (CISPR11)	Class B							
		Harmonic current	BS EN/EN61000-3-2	Class A							
	EMC IMMUNITY	Voltage flicker	BS EN/EN61000-3-3	-----							
		BS EN/EN60601-1-2									
		Parameter	Standard	Test Level / Note							
		ESD	BS EN/EN61000-4-2	Level 4, 15KV air ; Level 4, 8KV contact							
		RF field susceptibility	BS EN/EN61000-4-3	Level 3, 10V/m (80MHz~2.7GHz) Table 9, 9~28V/m (385MHz~5.78GHz)							
		EFT bursts	BS EN/EN61000-4-4	Level 3, 2KV							
		Surge susceptibility	BS EN/EN61000-4-5	Level 4, 4KV/Line-FG; 2KV/Line-Line							
		Conducted susceptibility	BS EN/EN61000-4-6	Level 3, 10V							
OTHERS	Magnetic field immunity	BS EN/EN61000-4-8		Level 4, 30A/m							
	Voltage dip, interruption	BS EN/EN61000-4-11		100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods							
	DIMENSION (L*W*H)	PCB:101.6*50.8*29mm or 4" * 2" * 1.141" inch ; Enclosed type:103.4*62*40mm or 4.07" * 2.44" * 1.57" inch									
NOTE	PACKING	PCB:0.15Kg; 72pcs/11.8Kg/0.84CUFT ; Enclosed type:0.24Kg; 60pcs/15.4Kg/1.06CUFT									
	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µF & 47µF parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Derating may be needed under low input voltages. Please check the derating curve for more details. 5. Touch current was measured from primary input to DC output. 6. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 7. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (available on http://www.meanwell.com)										
※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx											





120W Reliable Green Medical Power Supply

RPS-120 series

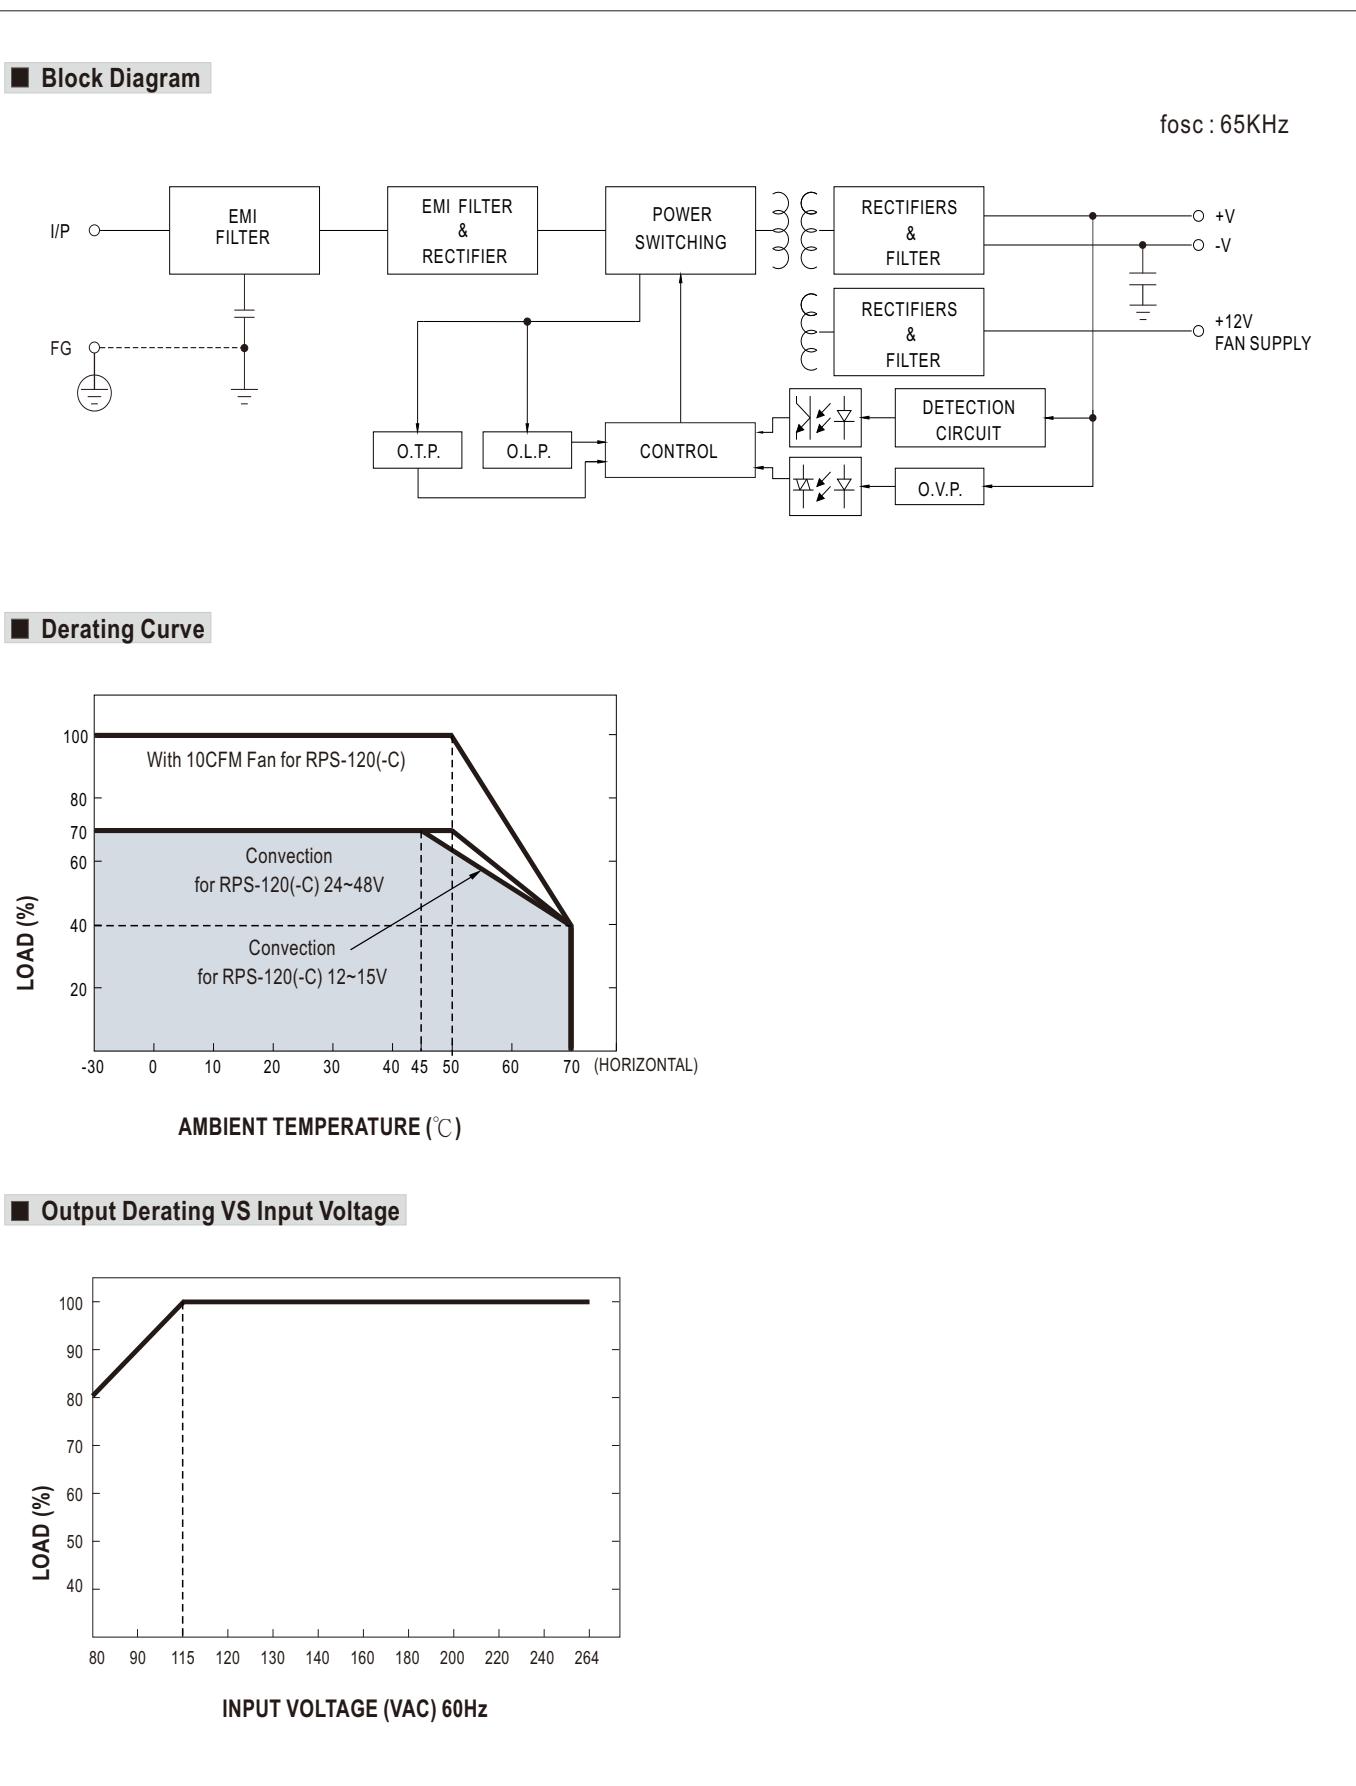

■ Mechanical Specification

● RPS-120 (PCB Type)

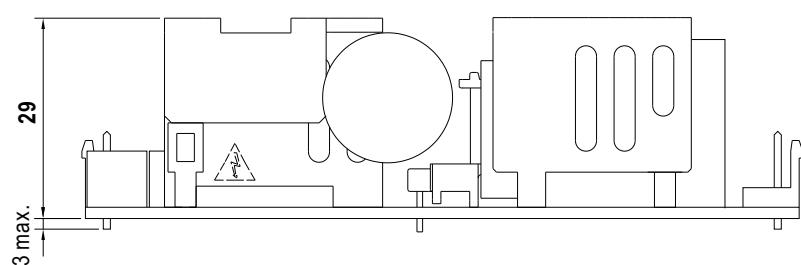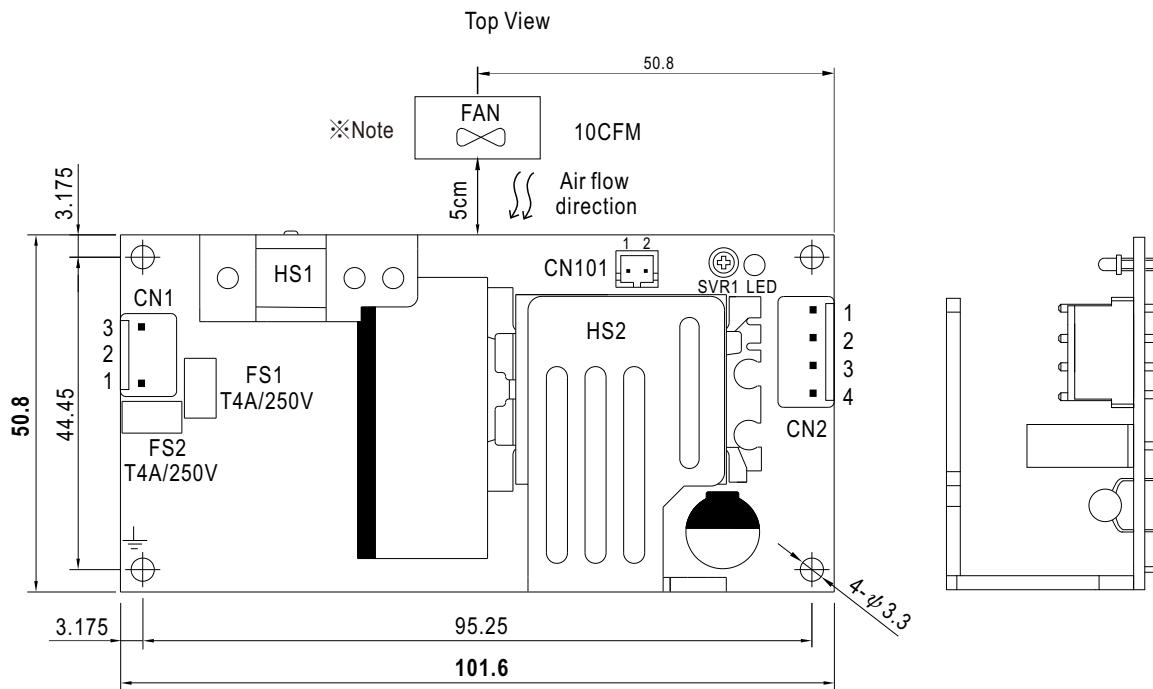

Side View








120W Reliable Green Medical Power Supply

RPS-120 series

■ Mechanical Specification

● RPS-120-C (Enclosed Type)


Case No.245A Unit:mm

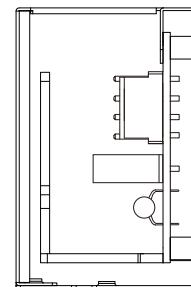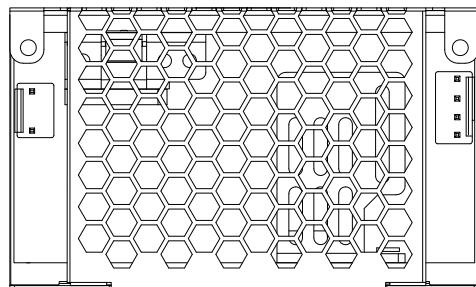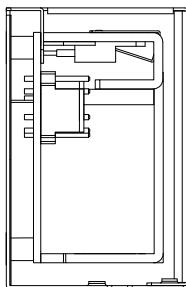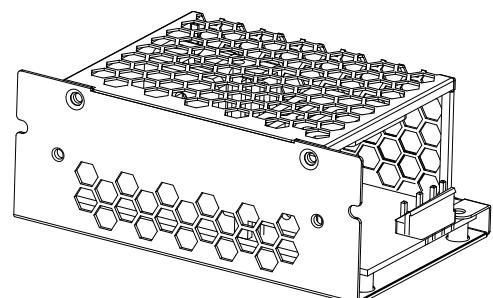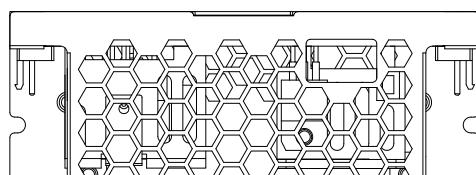


Side View

Top View

Side View

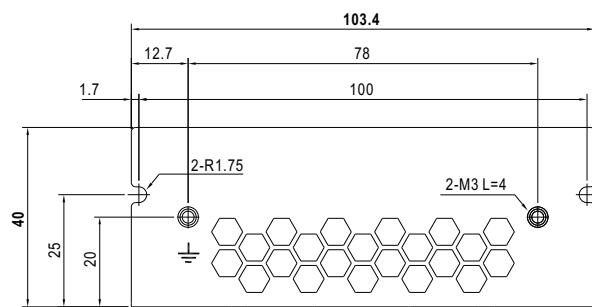

Side View

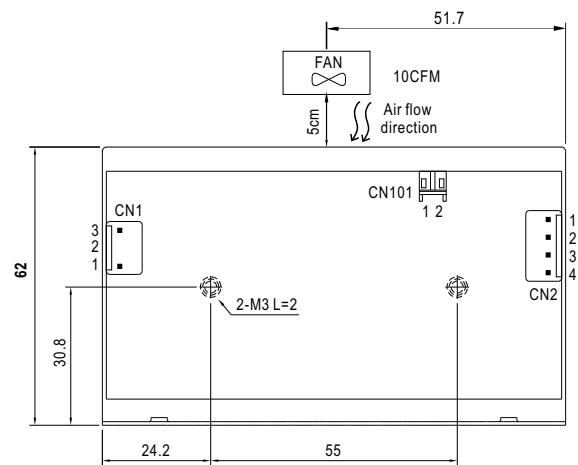

Bottom View

AC Input Connector (CN1) : JST B3P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	AC/N	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
2	No Pin		
3	AC/L		

DC Output Connector (CN2) : JST B4P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1,2	+V	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
3,4	-V		

FAN Connector(CN101) : JST S2B-PH-K-S or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	DC COM(FAN-)	JST PHR-2 or equivalent	JST SPH-002T-P0.5S or equivalent
2	+12V(FAN+)		



- 1.HS1,HS2 cannot be shorted.
- 2.HS1 must have safety isolation distance with system case.

※Note : 1. The FAN supply is designed to serve as the source of the additive external fan for the cooling of the power supply, enabling the full load delivery and assuring the best life span of the product. Please do not use this FAN supply to drive other devices.
2.The PCB type(Blank type)model delivers EMI Class B for both conducted emission and radiated emission for the power supply, when configured into either Class I (with FG) or Class II (no FG) system.
3.The Enclosed type(-C type) model is not suitable for the configuration within a Class II (no FG) system but is suggested to used within a Class I (with FG) system.

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>