



3W DIP Package DC-DC Regulated Converter

SLC03 & DLC03 series**■ Features**


- DIP16 package with industry standard pinout
- 2:1 wide input range
- Operating temperature range -40 ~ +85°C
- No minimum load required
- Comply to BS EN/EN55032 radiated Class B without additional components
- High efficiency up to 82%
- Protections: Short circuit (Continuous) / Overload / Input under voltage
- 1.5KVDC I/O isolation
- 3 years warranty

■ Applications

- Telecom/datacom system
- Wireless network
- Industrial control facility
- Instrument
- Analyzer
- Detector
- Data switch

■ Description

SLC03 and DLC03 series are 3W isolated and regulated module type DC-DC converter with DIP16 package. It features international standard pins, a high efficiency up to 82%, wide working temperature range -40~+85°C, 1.5KVDC I/P-O/P isolation voltage, the compliance to BS EN/EN55032 radiated Class B without additional components, continuous-mode short circuit protection, etc. The models account for different input voltage, 9~18V, 18~36V and 36~75V 2:1 wide input range, and various output voltage, 5V/12V/15V for single output and ±5V/±12V/±15V for dual outputs, which are suitable for all kinds of systems, such as industrial control, telecommunication field, distributed power architecture, and so on.

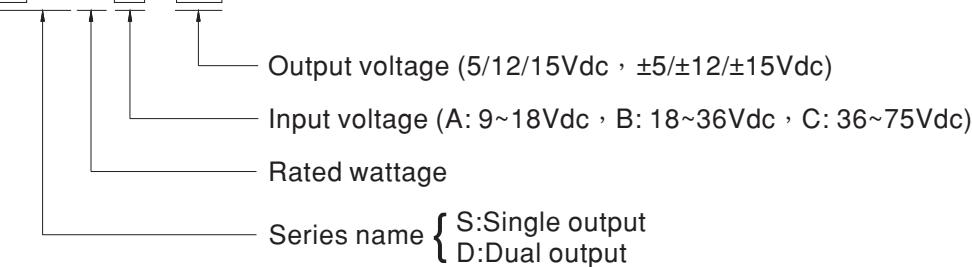■ Model Encoding**SLC03A-12**



3W DIP Package DC-DC Regulated Converter

SLC03 & DLC03 series**MODEL SELECTION TABLE**

ORDER NO.	INPUT			OUTPUT		EFFICIENCY (TYP.)	CAPACITOR LOAD (MAX.)		
	INPUT VOLTAGE (RANGE)	INPUT CURRENT		OUTPUT VOLTAGE	OUTPUT CURRENT				
		NO LOAD	FULL LOAD						
SLC03A-05	12V (9 ~ 18V)	25mA	330mA	5V	600mA	79%	1000µF		
SLC03A-12		15mA	320mA	12V	250mA	81%	470µF		
SLC03A-15		15mA	309mA	15V	200mA	81%	330µF		
DLC03A-05		30mA	325mA	±5V	±0 ~ 300mA	79%	* 220µF		
DLC03A-12		32mA	305mA	±12V	±0 ~ 125mA	82%	* 220µF		
DLC03A-15		32mA	313mA	±15V	±0 ~ 100mA	81%	* 220µF		
SLC03B-05	24V (18 ~ 36V)	10mA	154mA	5V	600mA	81%	1000µF		
SLC03B-12		10mA	154mA	12V	250mA	82%	470µF		
SLC03B-15		10mA	153mA	15V	200mA	82%	330µF		
DLC03B-05		20mA	158mA	±5V	±0 ~ 300mA	79%	* 220µF		
DLC03B-12		20mA	156mA	±12V	±0 ~ 125mA	81%	* 220µF		
DLC03B-15		20mA	156mA	±15V	±0 ~ 100mA	80%	* 220µF		
SLC03C-05	48V (36 ~ 75V)	7mA	77mA	5V	600mA	81%	1000µF		
SLC03C-12		7mA	76mA	12V	250mA	82%	470µF		
SLC03C-15		7mA	76mA	15V	200mA	82%	330µF		
DLC03C-05		10mA	79mA	±5V	±0 ~ 300mA	80%	* 220µF		
DLC03C-12		10mA	78mA	±12V	±0 ~ 125mA	80%	* 220µF		
DLC03C-15		10mA	78mA	±15V	±0 ~ 100mA	80%	* 220µF		

* For each output




3W DIP Package DC-DC Regulated Converter

SLC03 & DLC03 series

SPECIFICATION			
INPUT	VOLTAGE RANGE	A: 9~18Vdc , B: 18~36Vdc , C: 18~75Vdc	
	SURGE VOLTAGE (100ms max.)	12Vin models : 25Vdc ; 24Vin models : 50V ; 48Vin models : 100Vdc	
	FILTER	Internal capacitor	
	PROTECTION	Fuse recommended. 12Vin models: 1A Slow-Blow Type, 24Vin models: 0.5A Slow-Blow Type, 48Vin models: 200mA Slow-Blow Type	
	INTERNAL POWER DISSIPATION	1000mW	
OUTPUT	VOLTAGE ACCURACY	±2%	
	RATED POWER	3W	
	RIPPLE & NOISE Note.2	50mVp-p	
	LINE REGULATION Note.3	±0.2%	
	LOAD REGULATION Note.4	±0.5%	
PROTECTION	SWITCHING FREQUENCY (Typ.)	100KHz	
	SHORT CIRCUIT	Protection type : Continuous, automatic recovery	
	OVERLOAD	150 ~ 250% rated output power	
		Protection type : Recovers automatically after fault condition is removed	
	UNDER VOLTAGE LOCKOUT	Start-up voltage	12Vin: 8.8Vdc, 24Vin: 17Vdc, 48Vin: 34Vdc
		Shutdown voltage	12Vin: 7Vdc, 24Vin: 14Vdc, 48Vin: 30Vdc
ENVIRONMENT	COOLING	Free-air convection	
	WORKING TEMP.	-40 ~ +85°C (Refer to "Derating Curve")	
	CASE TEMPERATURE	+100°C max.	
	WORKING HUMIDITY	20% ~ 90% RH non-condensing	
	STORAGE TEMP., HUMIDITY	-40 ~ +105°C, 10 ~ 95% RH non-condensing	
	TEMP. COEFFICIENT	0.03% / °C (0 ~ 80°C)	
	SOLDERING TEMPERATURE	1.5mm from case of 3 ~ 5sec./265°C max.	
SAFETY & EMC (Note.5)	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes	
	SAFETY STANDARDS	EAC TP TC 020/2011 (EAC TP TC 004 for 48Vin type only) approved	
	WITHSTAND VOLTAGE	I/P-O/P:1.5KVDC	
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH	
	ISOLATION CAPACITANCE (Typ.)	80pF	
	EMC EMISSION	Parameter	Standard
		Conducted	BS EN/EN55032(CISPR32)
	EMC IMMUNITY	Radiated	BS EN/EN55032(CISPR32)
		Parameter	Standard
		ESD	BS EN/EN61000-4-2
		Radiated Susceptibility	BS EN/EN61000-4-3
		EFT/Burst	BS EN/EN61000-4-4
		Surge	BS EN/EN61000-4-5
		Conducted	BS EN/EN61000-4-6
		Magnetic Field	BS EN/EN61000-4-8
OTHERS	MTBF	300Khrs min. MIL-HDBK-217F(25°C)	
	DIMENSION (L*W*H)	22.1*13.8*8.55mm (0.87*0.54*0.34 inch)	
	CASE MATERIAL	Non-Conductive black plastic (UL 94V-0 rated)	
	PACKING	4.5g	
NOTE	1.All parameters are specified at normal input(A:12Vdc, B:24Vdc, C:48Vdc), rated load, 25°C 70% RH ambient. 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1μf & 47μf capacitor. 3.Line regulation is measured from low line to high line at rated load. 4.Load regulation is measured from 10% to 100% rated load. 5.The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) 6.An external input filter capacitor is required if the module has to meet BS EN/EN61000-4-4, BS EN/EN61000-4-5. The filter capacitor Power Mate suggests: 220uF/100V. ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx		

■ Mechanical Specification


- All dimensions in mm(inch)
- Tolerance: $x \pm 0.5\text{mm}(x.\text{xx} \pm 0.02")$
 $x.\text{xx} \pm 0.25\text{mm}(x.\text{xxx} \pm 0.01")$
- Pin size is $0.50 \times 0.30\text{mm (0.02" x 0.01")}$
- Pin is Tolerance: $x.\text{xx} \pm 0.07\text{mm}(x.\text{xxx} \pm 0.03")$

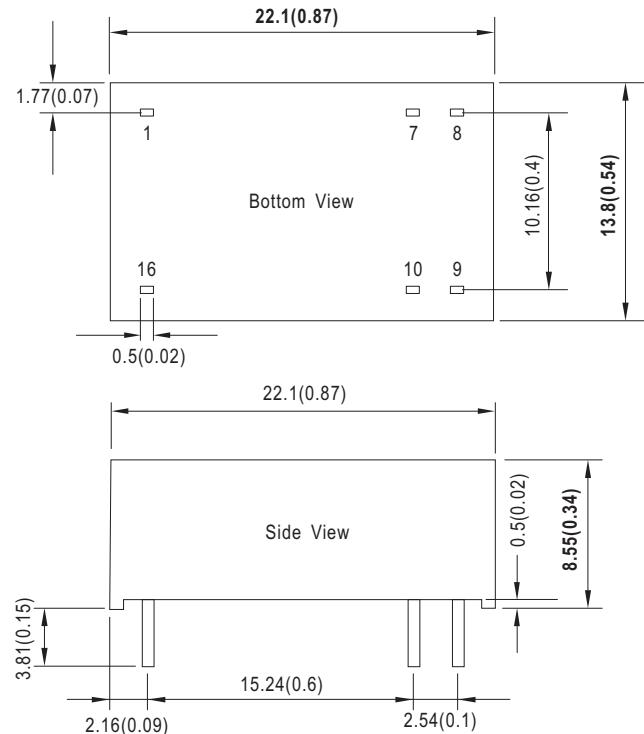

■ Plug Assignment

Pin-Out		
Pin No.	SLC03 (Single output)	DLC03 (Dual output)
1	-Vin	-Vin
7	N.C.	N.C.
8	N.C.	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin

■ Derating Curve

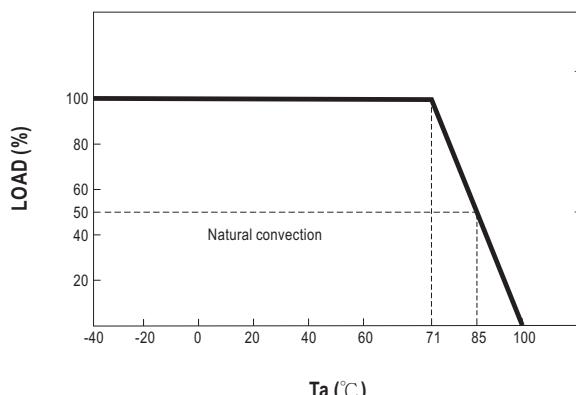

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>