
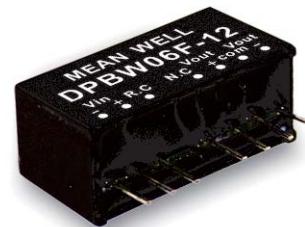


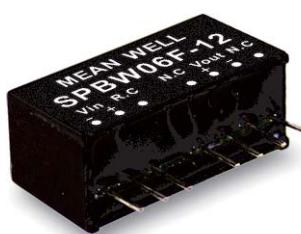

6W SIP Package DC-DC Regulated Converter

**SPBW06 & DPBW06** series

## ■ Features

- SIP8 package with industry standard pinout
- 4:1 ultrawide input range
- Operating temperature range -40 ~ +85°C
- No minimum load required
- High efficiency up to 89%
- Protections: Short circuit (Continuous) / Overload
- 1.5KVDC I/O isolation
- Remote ON/OFF control
- 3 years warranty


## ■ Applications

- Telecom/datacom system
- Wireless network
- Industrial control facility
- Instrument
- Analyzer
- Detector
- Data switch

## ■ Description

SPBW06 and DPBW06 series are 6W isolated and regulated module type DC-DC converter with SIP8 package. It features international standard pins, a high efficiency up to 89%, wide working temperature range -40~+85°C, 1.5KVDC I/P-O/P isolation voltage, continuous-mode short circuit protection, etc. The models account for different input voltage 9~36V and 18~75V 4:1 wide input range, and various output voltage, 3.3V/5V/12V/15V for single output and ±5V/±12V/±15V for dual outputs, which are suitable for all kinds of systems, Such as industrial control, telecommunication field, distributed power architecture, and so on.

## ■ Model Encoding

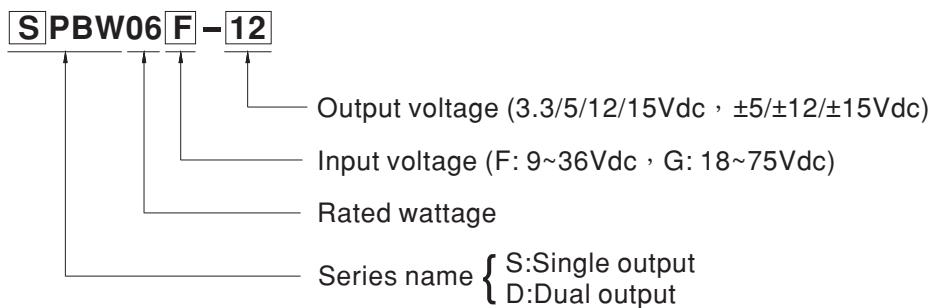



6W SIP Package DC-DC Regulated Converter

**SPBW06 & DPBW06** series**MODEL SELECTION TABLE**

ORDER NO.	INPUT			OUTPUT		EFFICIENCY (TYP.)	CAPACITOR LOAD (MAX.)		
	INPUT VOLTAGE (RANGE)	INPUT CURRENT		OUTPUT VOLTAGE	OUTPUT CURRENT				
		NO LOAD	FULL LOAD						
SPBW06F-03	24V (9 ~ 36V)	4mA	310mA	3.3V	0 ~ 1500mA	81%	4700µF		
SPBW06F-05		4mA	298mA	5V	0 ~ 1200mA	85%	2200µF		
SPBW06F-12		5mA	288mA	12V	0 ~ 500mA	88%	1100µF		
SPBW06F-15		5mA	288mA	15V	0 ~ 400mA	88%	470µF		
DPBW06F-05		4mA	298mA	±5V	±0 ~ 600mA	86%	*1400µF		
DPBW06F-12		6mA	288mA	±12V	±0 ~ 250mA	88%	*660µF		
DPBW06F-15		7mA	288mA	±15V	±0 ~ 200mA	88%	*220µF		
SPBW06G-03	48V (18 ~ 75V)	3mA	155mA	3.3V	0 ~ 1500mA	82%	4700µF		
SPBW06G-05		3mA	150mA	5V	0 ~ 1200mA	85%	2200µF		
SPBW06G-12		3mA	145mA	12V	0 ~ 500mA	88%	1100µF		
SPBW06G-15		5mA	145mA	15V	0 ~ 400mA	87%	470µF		
DPBW06G-05		4mA	150mA	±5V	±0 ~ 600mA	85%	*1400µF		
DPBW06G-12		3mA	145mA	±12V	±0 ~ 250mA	89%	*660µF		
DPBW06G-15		4mA	145mA	±15V	±0 ~ 200mA	88%	*220µF		

\* For each output




6W SIP Package DC-DC Regulated Converter

SPBW06 &amp; DPBW06 series

SPECIFICATION			
INPUT	VOLTAGE RANGE	F: 9~36Vdc , G: 18~75Vdc	
	SURGE VOLTAGE (100ms max.)	24Vin models : 50Vdc, 48Vin models : 100Vdc	
	FILTER	Internal capacitor	
	PROTECTION	Fuse recommended. 24Vin models: 1.25A fast-acting Type, 48Vin models: 630mA fast-acting Type	
	INTERNAL POWER DISSIPATION	500mW	
OUTPUT	VOLTAGE ACCURACY	±1.5%	
	RATED POWER	6W	
	RIPPLE & NOISE Note.2	100mVp-p	
	LINE REGULATION Note.3	±0.2%	
	LOAD REGULATION Note.4	Single output models: ±0.5%, Dual output models: ±1%	
PROTECTION	SWITCHING FREQUENCY (Typ.)	580KHz	
	SHORT CIRCUIT	Protection type : Continuous, automatic recovery	
	OVERLOAD	Protection type : Recovers automatically after fault condition is removed	
FUNCTION	REMOTE CONTROL	Power ON: R.C. ~ -Vin high impedance open ; Power OFF: supplying 2~4mA for R.C. pin (Please refer to the application circuit in following page)	
ENVIRONMENT	COOLING	Free-air convection	
	WORKING TEMP.	-40 ~ +85°C (Refer to "Derating Curve")	
	CASE TEMPERATURE	+100°C max.	
	WORKING HUMIDITY	20% ~ 90% RH non-condensing	
	STORAGE TEMP., HUMIDITY	-55 ~ +125°C, 10 ~ 95% RH non-condensing	
	TEMP. COEFFICIENT	0.03% / °C (0 ~ 65°C)	
	SOLDERING TEMPERATURE	1.5mm from case of 1 ~ 3sec./260°C max.	
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes	
SAFETY & EMC ( Note.5 )	SAFETY STANDARDS	EAC TP TC 020/2011 (EAC TP TC 004 for 48Vin type only) approved	
	WITHSTAND VOLTAGE	I/P-O/P:1.5KVDC	
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH	
	ISOLATION CAPACITANCE (Typ.)	50pF	
	EMC EMISSION	Parameter	Standard
		Conducted	BS EN/EN55032(CISPR32)
	EMC IMMUNITY	Radiated	BS EN/EN55032(CISPR32)
		Parameter	Standard
		ESD	BS EN/EN61000-4-2
		Radiated Susceptibility	BS EN/EN61000-4-3
		EFT/Burst	BS EN/EN61000-4-4
		Surge	BS EN/EN61000-4-5
		Conducted	BS EN/EN61000-4-6
		Magnetic Field	BS EN/EN61000-4-8
OTHERS	MTBF	1850Khrs MIL-HDBK-217F(25°C)	
	DIMENSION (L*W*H)	21.8*9.2*11.1mm (0.86*0.36*0.44 inch)	
	CASE MATERIAL	Non-Conductive black plastic (UL 94V-0 rated)	
	PACKING	4.8g	
NOTE	1. All parameters are specified at normal input(F:24Vdc, G:48Vdc), rated load, 25°C 70% RH ambient. 2. Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1μF & 47μF capacitor. 3. Line regulation is measured from low line to high line at rated load. 4. Load regulation is measured from 0% to 100% rated load. 5. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="http://www.meanwell.com">http://www.meanwell.com</a> ) ※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a>		

### ■ Mechanical Specification


- All dimensions in mm(inch)
- Tolerance:  $x.x \pm 0.5\text{mm}$  ( $x.xx \pm 0.02''$ )
- Pin pitch tolerance:  $\pm 0.05\text{mm}$  ( $\pm 0.002''$ )

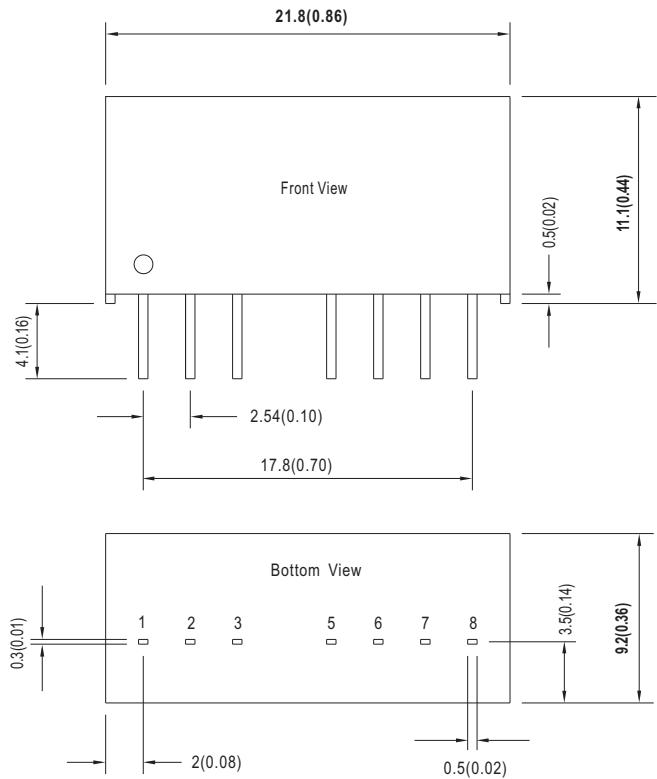

### ■ Plug Assignment

Pin-Out		
Pin No.	SPBW06 (Single output)	DPBW06 (Dual output)
1	-Vin	-Vin
2	+Vin	+Vin
3	R.C.	R.C.
5	N.C.	N.C.
6	+Vout	+Vout
7	-Vout	Common
8	N.C.	-Vout

### ■ Derating Curve

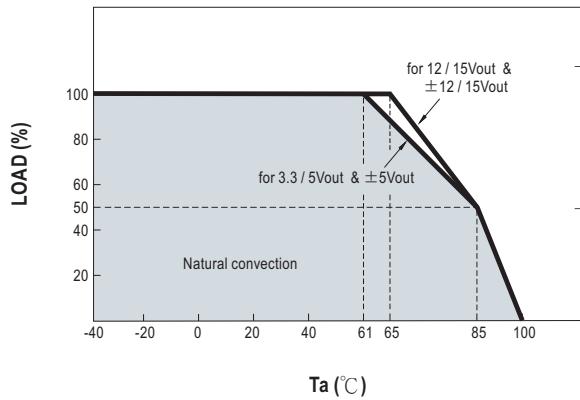




6W SIP Package DC-DC Regulated Converter

**SPBW06 & DPBW06** series

### ■ Remote ON/OFF Control

The remote ON/OFF input feature of the converter allows external circuitry to turn the converter ON or OFF. Active-high remote ON/OFF is available as standard. The converter is turned ON if the remote ON/OFF pin is open circuit. Supply the ON/OFF pin at 2mA to 4mA will turn the converter OFF. The signal level of the ON/OFF pin is defined with respect to ground. If not using the ON/OFF pin, leave the pin open (module will be ON, recommended application as below)


ON/OFF pin applied current via 1KΩ

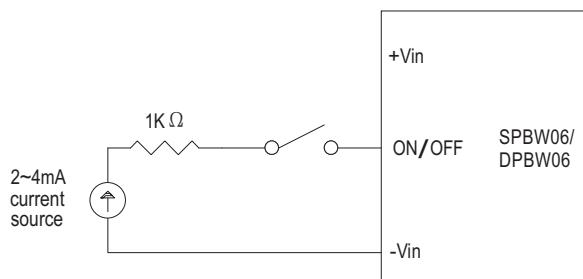

Application circuit

### ■ EMC Suggestion Circuit

※ Required external components to meet BS EN/EN55032 class A/B emission are as below:

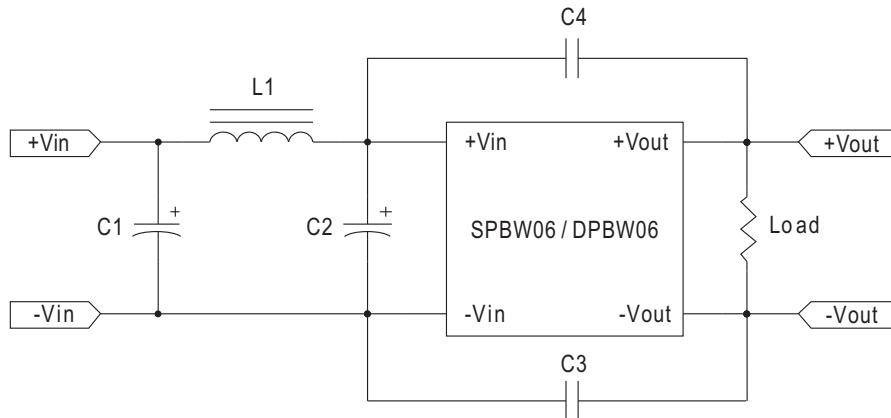

Model No.	BS EN/EN55032 Class A					BS EN/EN55032 Class B				
	C1	C2	C3	C4	L1	C1	C2	C3	C4	L1
SPBW06F-03	10μF/50V	NC	150pF/2KV	150pF/2KV	10μH	10μF/50V	NC	1500pF/2KV	1500pF/2KV	10μH
SPBW06F-05	10μF/50V	NC	150pF/2KV	150pF/2KV	10μH	10μF/50V	NC	1500pF/2KV	1500pF/2KV	10μH
SPBW06F-12	10μF/50V	NC	150pF/2KV	150pF/2KV	10μH	10μF/50V	NC	1500pF/2KV	1500pF/2KV	10μH
DPBW06F-15	10μF/50V	NC	150pF/2KV	150pF/2KV	10μH	10μF/50V	NC	1500pF/2KV	1500pF/2KV	10μH
DPBW06F-05	10μF/50V	NC	150pF/2KV	150pF/2KV	10μH	10μF/50V	NC	1500pF/2KV	1500pF/2KV	10μH
DPBW06F-12	10μF/50V	NC	150pF/2KV	150pF/2KV	10μH	10μF/50V	NC	1500pF/2KV	1500pF/2KV	10μH
DPBW06F-15	10μF/50V	NC	150pF/2KV	150pF/2KV	10μH	10μF/50V	NC	1500pF/2KV	1500pF/2KV	10μH
SPBW06G-03	1μF/100V	NC	150pF/2KV	150pF/2KV	10μH	2.2μF/100V	2.2μF/100V	1500pF/2KV	1500pF/2KV	10μH
SPBW06G-05	1μF/100V	NC	150pF/2KV	150pF/2KV	10μH	2.2μF/100V	2.2μF/100V	1500pF/2KV	1500pF/2KV	10μH
SPBW06G-12	1μF/100V	NC	150pF/2KV	150pF/2KV	10μH	2.2μF/100V	2.2μF/100V	1500pF/2KV	1500pF/2KV	10μH
SPBW06G-15	1μF/100V	NC	150pF/2KV	150pF/2KV	10μH	2.2μF/100V	2.2μF/100V	1500pF/2KV	1500pF/2KV	10μH
DPBW06G-05	1μF/100V	NC	150pF/2KV	150pF/2KV	10μH	2.2μF/100V	NC	1500pF/2KV	1500pF/2KV	10μH
DPBW06G-12	1μF/100V	NC	150pF/2KV	150pF/2KV	10μH	2.2μF/100V	NC	1500pF/2KV	1500pF/2KV	10μH
DPBW06G-15	1μF/100V	NC	150pF/2KV	150pF/2KV	10μH	2.2μF/100V	NC	1500pF/2KV	1500pF/2KV	10μH

Note: All of capacitors are ceramic capacitors

### ■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>