



## FEATURES

- Universal 165 - 264VAC or 200 - 370VDC input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30°C to +70°C
- Low standby power consumption, high efficiency
- High I/O isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- OVC III (designed to meet EN61558)
- Operating up to 5000m altitude
- 3 years warranty



LM100-22Bxx series is one of Mornsun's enclosed AC-DC switching power supply. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency and high reliability. These converters offer excellent EMC performance and meet IEC/EN1000-4, CISPR32/EN55032, IEC/UL/EN62368, IEC/EN60335, GB4943, IEC/EN61558 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

## Selection Guide

Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (uF)
EN/CCC/IEC/BIS	LM100-22B05	90	5V/18A	4.5-5.5	86	10000
	LM100-22B12	102	12V/8.5A	10.2-13.8	87.5	6800
	LM100-22B15	105	15V/7.0A	13.5-18	87.5	3300
	LM100-22B24	108	24V/4.5A	21.6-28.8	90	2200
	LM100-22B36	100.8	36V/2.8A	32.4-39.6	90	1000
	LM100-22B48	110.4	48V/2.3A	43.2-52.8	91	470

Note: 1. \*Use suffix "C" for terminal with protective cover and suffix "Q" for conformal coating.

2. The product picture is for reference only. For details, please refer to the actual product.

## Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit	
Input Voltage Range	AC input		165	--	264	VAC	
	DC input		200	--	370	VDC	
Input Voltage Frequency			47	--	63	Hz	
Input Current	230VAC		--	--	2.5	A	
Inrush Current	230VAC	Cold start	--	65	--		
Leakage Current	240VAC		<0.75mA				
Hot Plug			Unavailable				

## Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	5V	--	±2	--	%
		12V/15V/24V/36V/48V	--	±1	--	
Line Regulation	Rated load		--	±0.5	--	
Load Regulation	0% - 100% load	5V	--	±1	--	
		12V/15V/24V/36V/48V	--	±0.5	--	
Output Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	5V	--	100	--	mV
		12V/15V	--	120	--	
		24V	--	150	--	

		36V/48V	--	200	--	
Temperature Coefficient			--	±0.03	--	%/°C
Minimum Load			0	--	--	%
Stand-by Power Consumption	230VAC	5V/12V/15V/24V	--	--	0.3	W
		36V/48V	--	--	0.5	
Hold-up Time	230VAC		15	25	--	ms
Short Circuit Protection	Recovery time <5s after the short circuit disappear.			Hiccup, continuous, self-recover		
Over-current Protection				110%-200% Io, self-recover		
Over-voltage Protection	5V			≤7.5VDC (Output voltage turn off, hiccup or clamp)		
	12V			≤19.2VDC (Output voltage turn off, hiccup or clamp)		
	15V			≤24VDC (Output voltage turn off, hiccup or clamp)		
	24V			≤38.4VDC (Output voltage turn off, hiccup or clamp)		
	36V			≤57.6VDC (Output voltage turn off, hiccup or clamp)		
	48V			≤60VDC (Output voltage turn off, hiccup or clamp)		

Note: \*The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.

## General Specifications

Item	Operating Conditions			Min.	Typ.	Max.	Unit	
Isolation	Input - 	Electric strength test for 1min., leakage current <10mA			2000	--	--	VAC
	Input - output	4000	--	--				
	Output - 	1250	--	--				
Insulation Resistance	Input - 	At 500VDC			100	--	--	MΩ
	Input - output	100	--	--				
	Output - 	100	--	--				
Operating Temperature				-30	--	+70	°C	
Storage Temperature				-40	--	+85		
Storage Humidity	Non-condensing			10	--	95	%RH	
Operating Humidity				20	--	90		
Switching Frequency				--	65	--	kHz	
Power Derating	Operating temperature derating	5V output	+45°C to +70°C	1.6	--	--	%/°C	
		Other output	+50°C to +70°C	2.0	--	--		
Safety Standard				IEC/EN/BS EN62368-1, GB4943.1, IIS13252 (Part1) & EN61558-1, EN60335-1 safety approved; Design refer to UL62368-1, IEC60335-1, IEC61558-1				
Safety Class				CLASS I				
MTBF	MIL-HDBK-217F@25°C			>300,000 h				



## Mechanical Specifications

Case Material	Metal (AL1100, SGCC)		
Dimensions	129.00 x 97.00 x 30.00mm		
Weight	5V	315g (Typ.)	
	12V/15V/24V/36V/48V	295g (Typ.)	
Cooling Method	Free air convection		



## Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
	Harmonic current	IEC/EN61000-3-2	CLASS A	
Immunity	ESD	IEC/EN 61000-4-2	Contact $\pm 6\text{KV}$ /Air $\pm 8\text{KV}$	perf. Criteria A
	RS	IEC/EN 61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN 61000-4-4	$\pm 2\text{KV}$	perf. Criteria A
	Surge	IEC/EN 61000-4-5	line to line $\pm 2\text{KV}$ /line to PE $\pm 4\text{KV}$	perf. Criteria A
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	0%, 70%	perf. Criteria B

## Product Characteristic Curve

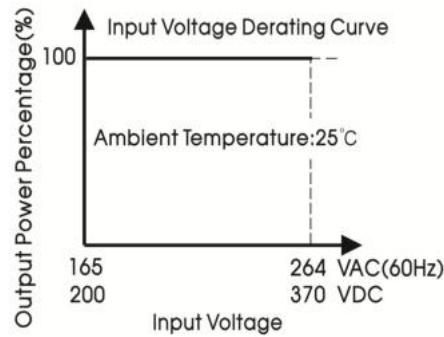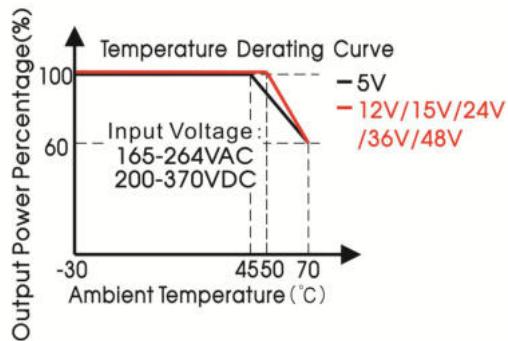


Note: This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

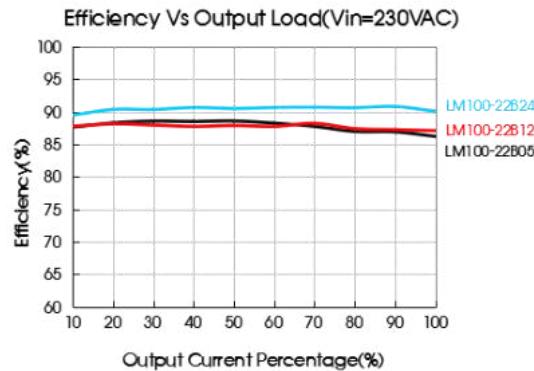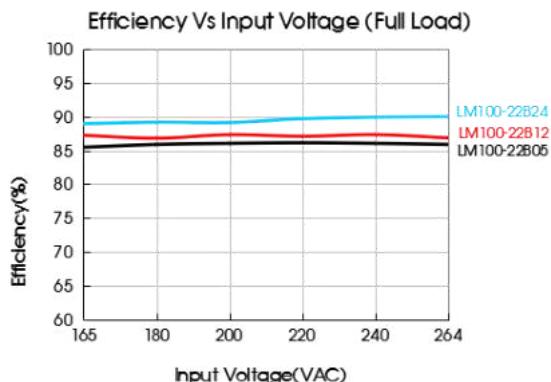


Dimensions and Recommended Layout

LM100-22Bxx, LM100-22Bxx-Q Series

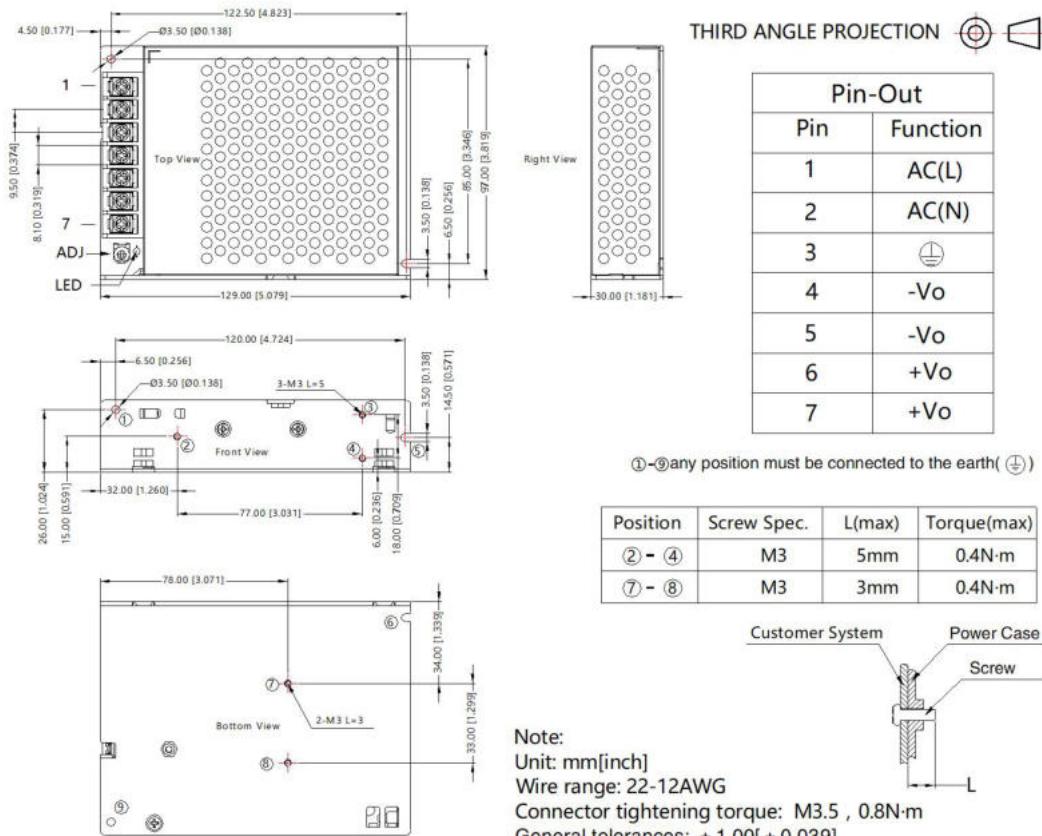

LM100-22Bxx-C Series

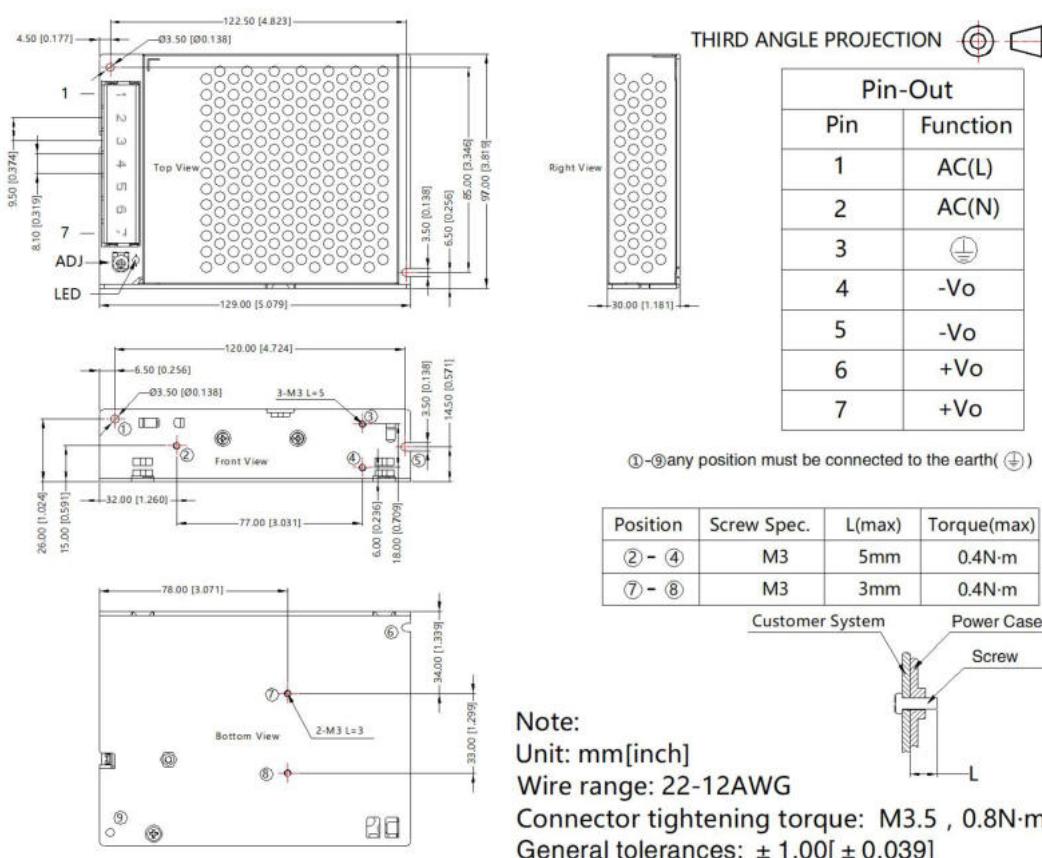

Note:

1. For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58220120;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
3. The ambient temperature derating of 5°C/1000m is needed for operating altitude greater than 2000m;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. The out case needs to be connected to the earth of system when the terminal equipment in operating;
9. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.
10. The power supply is considered a component which will be installed into a final equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

## Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: [info@mornsun.cn](mailto:info@mornsun.cn)

[www.mornsun-power.com](http://www.mornsun-power.com)