



CE Report



CE

CB

UK
CA

RoHS



EN62368-1
EN60335-1
EN61558-1

GB4943.1

IEC62368-1

BS EN 62368-1

FEATURES

- Universal 165 - 264VAC or 200 - 370VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30°C to +70°C
- Low standby power consumption, high efficiency
- High I/O isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- OVC III (designed to meet EN61558)
- Operating altitude up to 5000m
- 3 years warranty

LM75-22Bxx series is one of Mornsun's enclosed AC-DC switching power supply. It features AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/UL/EN62368, EN60335, GB4943 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

Selection Guide

Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (uF)
EN/IEC/CCC /BIS	LM75-22B05	70	5V/14A	4.5-5.5	86	10000
	LM75-22B12	72	12V/6A	10.2-13.8	88	6000
	LM75-22B15	75	15V/5A	13.5-18	88	5000
	LM75-22B24	76.8	24V/3.2A	21.6-28.8	90	1500
	LM75-22B36	75.6	36V/2.1A	32.4-39.6	90	1000
	LM75-22B48	76.8	48V/1.6A	43.2-52.8	91.5	680

Note: 1. *Use suffix "C" for terminal with protective cover, suffix "Q" for conformal coating.

2. The product picture is for reference only. For details, please refer to the actual product.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input		165	--	264	VAC
	DC input		200	--	370	VDC
Input Voltage Frequency			47	--	63	Hz
Input Current	230VAC		--	--	1	A
Inrush Current	230VAC	Cold start	--	65	--	
Leakage Current	240VAC				<0.75mA	
Hot Plug					Unavailable	

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	5V	--	±2	--	%
		12V/15V/24V/36V/48V	--	±1	--	
Line Regulation	Rated load		--	±0.5	--	
Load Regulation		5V	--	±1	--	
		12V/15V/24V/36V/48V	--	±0.5	--	
Ripple & Noise*	20MHz bandwidth	5V	--	100	--	mV
		12V/15V	--	120	--	

	(peak-to-peak value)	24V	--	150	--	
		36V	--	200	--	
		48V	--	200	--	
Temperature Coefficient			--	±0.03	--	%/°C
Minimum Load			0	--	--	%
Stand-by Power Consumption			--	--	0.3	W
Hold-up Time	230VAC		15	--	--	ms
Short Circuit Protection	Recovery time <5s after the short circuit disappear.			Hiccup, continuous, self-recovery		
Over-current Protection				110%-150% Io, self-recovery		
Over-voltage Protection	5V			≤6.3VDC (Output voltage clamp)		
	12V			≤16.2VDC (Hiccup, self-recovery)		
	15V			≤21.75VDC (Hiccup, self-recovery)		
	24V			≤33.6VDC (Hiccup, self-recovery)		
	36V			≤50VDC (Output voltage clamp)		
	48V			≤60VDC (Output voltage clamp)		

Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.

General Specifications

Item	Operating Conditions			Min.	Typ.	Max.	Unit	
Isolation Test	Input -	Electric strength test for 1min., leakage current <10mA			2000	--	--	
	Input - output	4000	--	--	VAC			
	Output -	1250	--	--				
Insulation Resistance	Input -	At 500VDC			100	--	--	
	Input - output	100	--	--	MΩ			
	Output -	100	--	--				
Operating Temperature				-30	--	+70	°C	
Storage Temperature				-40	--	+85		
Storage Humidity	Non-condensing			--	--	95	%RH	
Switching Frequency				--	65	--	kHz	
Power Derating	Operating temperature derating	5V output	+40°C to +70°C	1.3	--	--	%/°C	
		Other output	+50°C to +70°C	2	--	--		
Safety Standard				IEC/EN/BS EN62368-1, GB4943.1, IIS13252(Part1) & EN60335-1, EN61558-1 safety approved; Design refer to UL62368-1, IEC60335-1, IEC61558-1				
Safety Class				CLASS I				
MTBF	MIL-HDBK-217F@25°C			>300,000 h				

Mechanical Specifications



Case Material	Metal (AL1100, SGCC)		
Dimensions	99.00 x 97.00 x 30.00 mm		
Weight	220g (Typ.)		
Cooling Method	Free air convection		

Electromagnetic Compatibility (EMC)



Emissions	CE	CISPR32/EN55032 CLASS B
	RE	CISPR32/EN55032 CLASS B

Immunity	Harmonic current	IEC/EN61000-3-2 CLASS A	
	ESD	IEC/EN 61000-4-2 Contact $\pm 6\text{KV}$ /Air $\pm 8\text{KV}$	perf. Criteria A
	RS	IEC/EN 61000-4-3 10V/m	perf. Criteria A
	EFT	IEC/EN 61000-4-4 $\pm 2\text{KV}$	perf. Criteria A
	Surge	IEC/EN 61000-4-5 line to line $\pm 2\text{KV}$ /line to PE $\pm 4\text{KV}$	perf. Criteria A
	CS	IEC/EN61000-4-6 10 Vr.m.s	perf. Criteria A
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11 0%, 70%	perf. Criteria B

Product Characteristic Curve

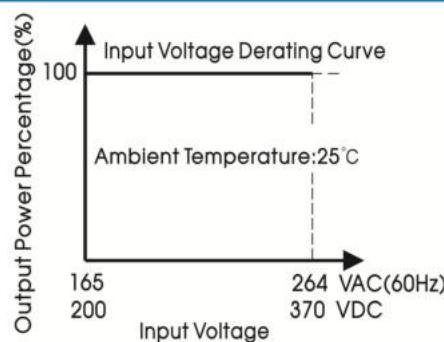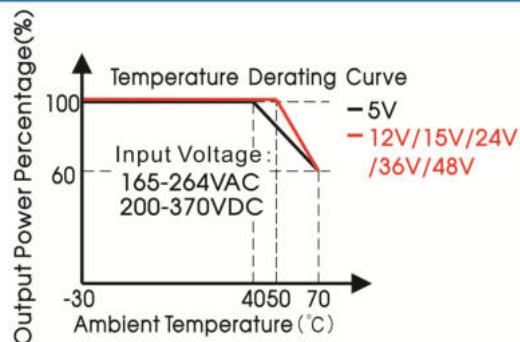


Note: This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

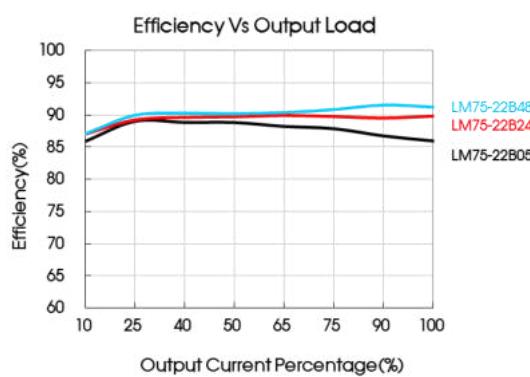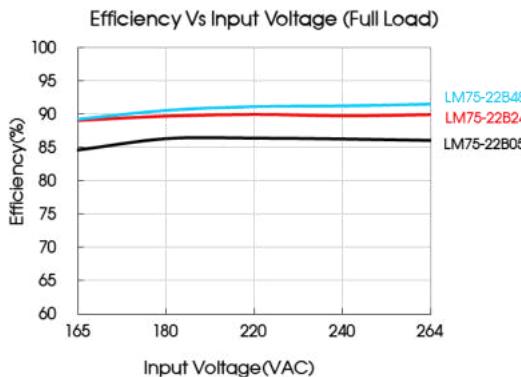

Dimensions and Recommended Layout


LM75-22Bxx, LM75-22Bxx-Q Series

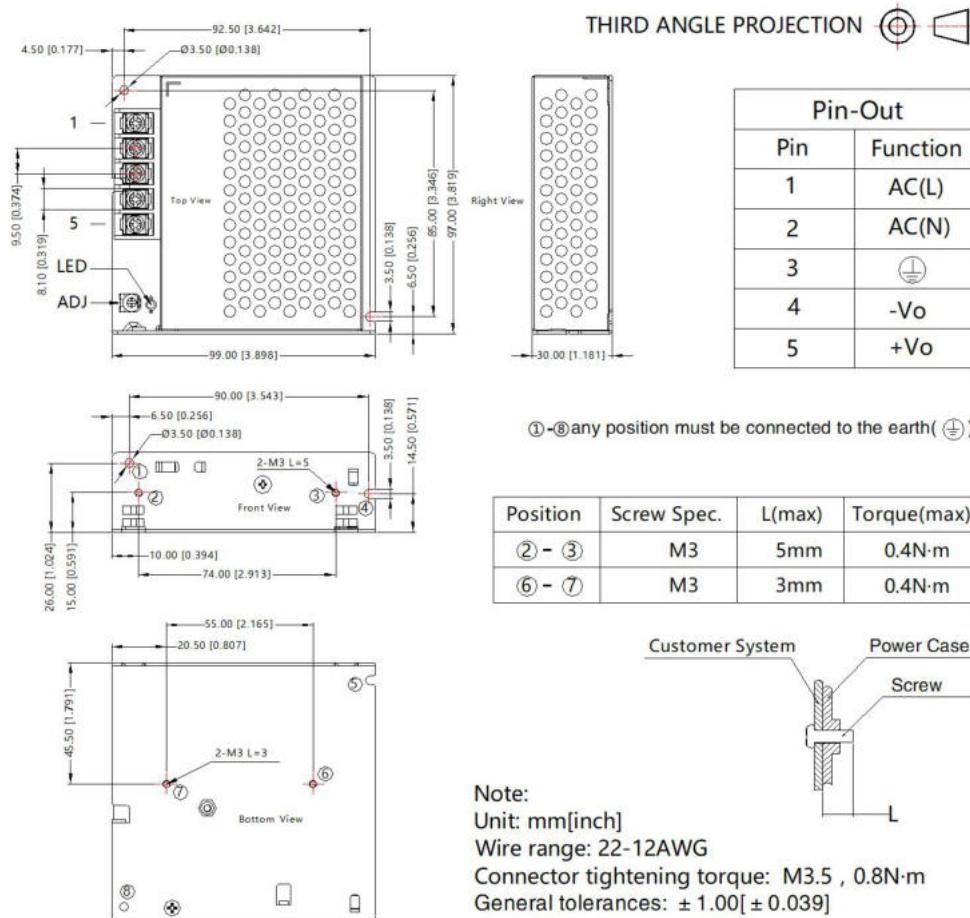

Pin-Out	
Pin	Function
1	AC(L)
2	AC(N)
3	⏚
4	-Vo
5	+Vo


①-⑧ any position must be connected to the earth (⏚)

Position	Screw Spec.	L(max)	Torque(max)
② - ③	M3	5mm	0.4N·m
⑥ - ⑦	M3	3mm	0.4N·m

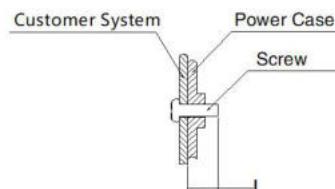

Note:
Unit: mm[inch]
Wire range: 22-12AWG
Connector tightening torque: M3.5 , 0.8N·m
General tolerances: ± 1.00[± 0.039]


LM75-22Bxx-C Series

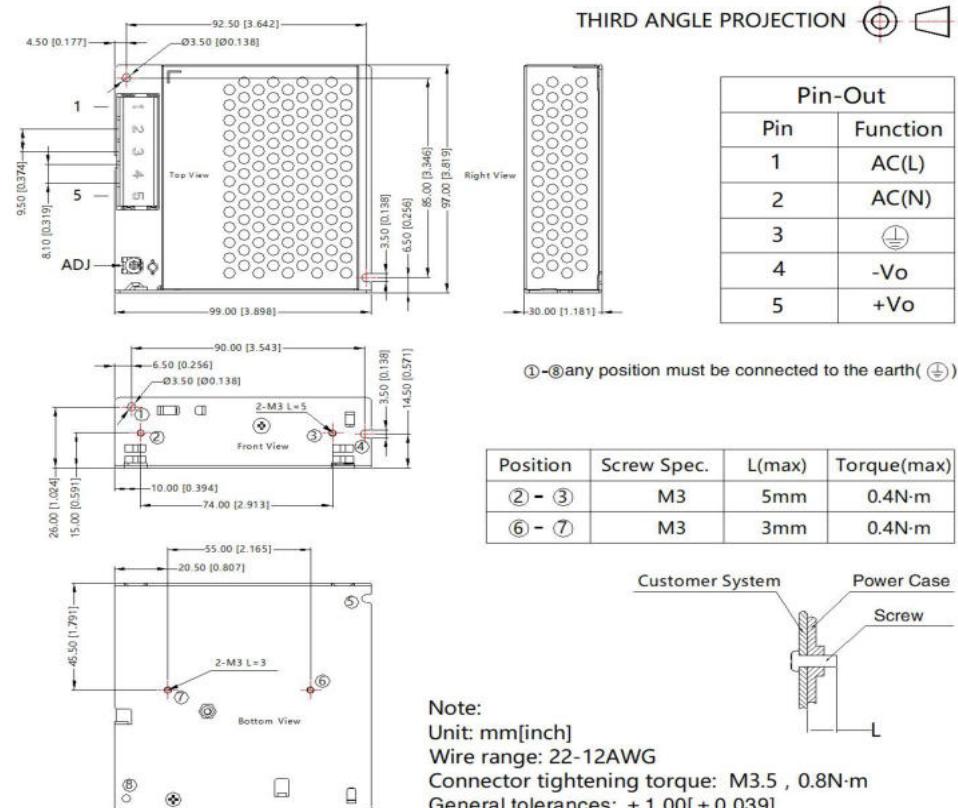

Pin-Out	
Pin	Function
1	AC(L)
2	AC(N)
3	⏚
4	-Vo
5	+Vo

①-⑧ any position must be connected to the earth (⏚)

Position	Screw Spec.	L(max)	Torque(max)
② - ③	M3	5mm	0.4N·m
⑥ - ⑦	M3	3mm	0.4N·m

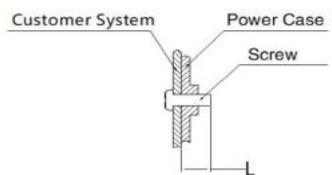

Note:
Unit: mm[inch]
Wire range: 22-12AWG
Connector tightening torque: M3.5 , 0.8N·m
General tolerances: ± 1.00[± 0.039]

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220119;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
3. The room temperature derating of $5^{\circ}\text{C}/1000\text{m}$ is needed for operating altitude greater than 2000m;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. The out case needs to be connected to PE (地) of system when the terminal equipment in operating;
9. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com