


Dual high speed RS485 dual isolated transceiver module (Power distribution)

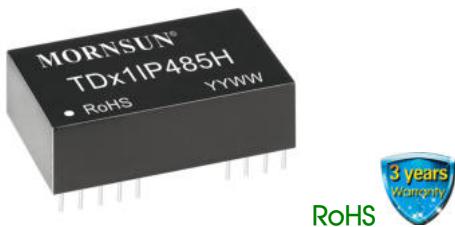

FEATURES

- Integrated high efficient isolated DC-DC converter
- High baud rate of up to 115200bps
- Two-port isolation test voltage(2.5kVDC)
- Operating ambient temperature range: -40°C to +85°C
- The bus supports maximum 32 nodes
- Set isolation and ESD bus protection in one

The main function of the TD31IP485H/TD51IP485H series is to convert a logic level signal into isolated RS485 differential level signals. The special integrated IC technology of the RS485 transceiver achieves isolation between the power supply and the signal lines isolation, does RS485 communication and protects the bus all in one and the same module. The product's isolated power supply withstands a test voltage of up to 2500VDC. It has two way independent of RS485 network function, and the two-port RS485 networks are isolated. Also, they can easily be embedded in the user's end equipment, to achieve fully functional RS485 network connections.

Selection Guide

Certification	Part No.	Power input (VDC)	Baud rate (bps)	Static Current (mA)	Max. Operating Current (mA)	Isolated power output (typ.)(VDC)	Number of Nodes
--	TD31IP485H	3.17-3.45	115200	50	121	5	32
	TD51IP485H	4.75-5.25	115200	30	80	5	32

Input Specifications

Item	Operating Conditions		Value
Power Input	Static Current	Power on, no communication	TD31IP485H≤50mA, TD51IP485H≤30mA
	Send Current	115200bps Square wave communication	TD31IP485H≤121mA, TD51IP485H≤80mA
Input	Serial Interface	TD31IP485H	Compatible with + 3.3V UART interface only
		TD51IP485H	Compatible with + 5V UART interface only
	Pin Current		I _{TXD} ≤2mA; I _{RXD} ≤2 mA; I _{CON} ≤5mA

Bus Interface

Item	Operating Conditions		Value
Output	RS485 Bus Interface		Standard RS485 interface, pull-up and pull-down resistors with 4.7kΩ each on A and B channels.
	Isolated Power Output		Nominal 5V, ≤0.15W

Transmission Specifications

Item	Operating Conditions		Value						
Data Rate			115200bps (max.)						
Transceiver Switching Delay			30us -100us Delay time (typ. to max.) for transition from sending data (receiving data) to receiving data (sending data)						
Number of Nodes			Up to 32 nodes connected on one bus						
Transceiver Control			Refer to below truth table						
Truth Table	Sending status	Input		Output					
		CON	TXD	A	B	Line state			
		0	1	1	0	Normal			
		0	0	0	1	Normal			
		Input		Output					
	Receiving status ^①	CON	A-B	RXD					
		1	≥-20mV	1					
		1	≤-200mV	0					
		1	-200mV < V _A -V _B < -20mV	Undefined state					

Note: ①Receiving threshold varies with V_{CC} will produce subtle error.

General Specifications

Item	Operating Conditions	Value
Electric Isolation		Two-terminal isolation (input to output) isolation
Isolation Test	Electric Strength Test for 1 min., leakage current <5mA	2500VDC
Operating Temperature		-40°C to +85°C
Transportation and Storage Temperature		-50°C to +105°C
Operating Humidity		10% - 90%
Casing Temperature Rise	Ta=25°C	25°C (Typ.)
Application Environment		The presence of dust, severe vibration, shock and corrosive gas may cause damage to the product

Mechanical Specifications

Case Material	Black flame-retardant heat-proof plastic (UL94-V0)
Package	DIP24
Weight	11.0g (Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS A (see Fig.2-②)	
	RE	CISPR32/EN55032	CLASS A (see Fig.2-②)	
Immunity	ESD	IEC/EN61000-4-2	Contact ±4kV	perf. Criteria B
	EFT	IEC/EN61000-4-4	±2kV (Power supply port)	(see Fig.2-①) perf. Criteria B
		IEC/EN61000-4-4	±1kV (Signal port)	(see Fig.2-③) perf. Criteria B
	Surge	IEC/EN61000-4-5	±1kV (Power supply port)	(see Fig.2-①) perf. Criteria B
			±4kV (line to ground) (Signal port)	(see Fig.2-③) perf. Criteria B

Application Precautions

1. Carefully read and follow the instructions before use; contact our technical support if you have any question;
2. Do not use the product in hazardous areas;
3. Use only DC power supply source for this product. 220V AC power supply is prohibited;
4. It is strictly forbidden to disassemble the product privately in order to avoid product failure or malfunction.
5. Hot-swap is not supported.
6. If the external input of TXD is insufficient, the pull-up resistor should be added according to the situation.

After-sales service

1. Factory inspection and quality control are strictly enforced before shipping any product; please contact your local representative or our technical support if you experience any abnormal operation or possible failure of the module;
2. The products have a 3-year warranty period, from the date of shipment. The product will be repaired or exchanged free of charge within the warranty period for any quality problem that occurs under normal use.

Applied circuit

Refer to the *RS485 Isolated Industrial Bus Interface Module Application Manual*.

Design Reference

1. Typical application circuit

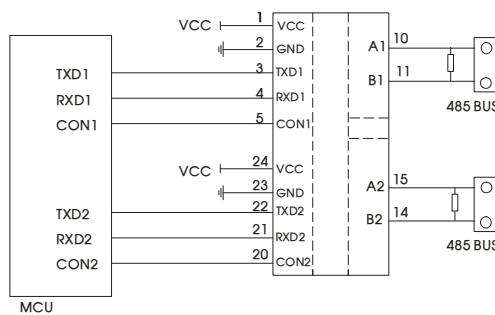


Fig.1

Note: 1 pin and 24 pin are internal connected, 23 pin and 2 pin are internal connected.

2. Recommended port protection circuit

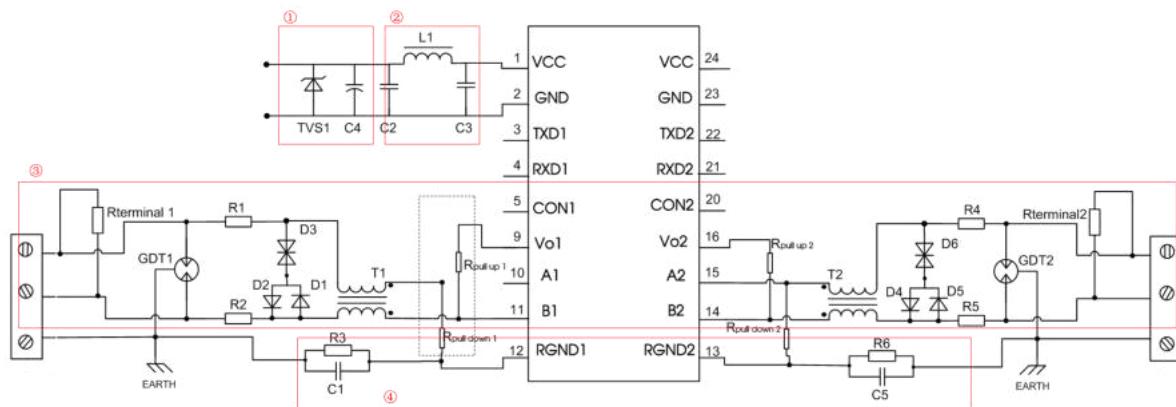



Fig. 2

Recommended components and values:

Component	Recommended part, value	Component	Recommended part, value
R3,R6	1M Ω	R1,R2,R4,R5	2.7 Ω /2W
C1,C5	1nF, 2kV	D1,D2,D4,D5	1N4007
T1,T2	ACM2520-301-2P	D3,D6	SMBJ8.5CA
GDT1,GDT2	B3D090L	R _{terminal1} ,R _{terminal2}	120 Ω
C4	220uF/10V (Electrolytic capacitor)	C2,C3	1uF/50V
L1	10uH	TVS1	SMCJ5.0A (TD31IP485H) SMCJ6.5A(TD51IP485H)

3. For additional information, please refer to our application note on www.mornsun-power.com

Dimensions and Recommended Layout

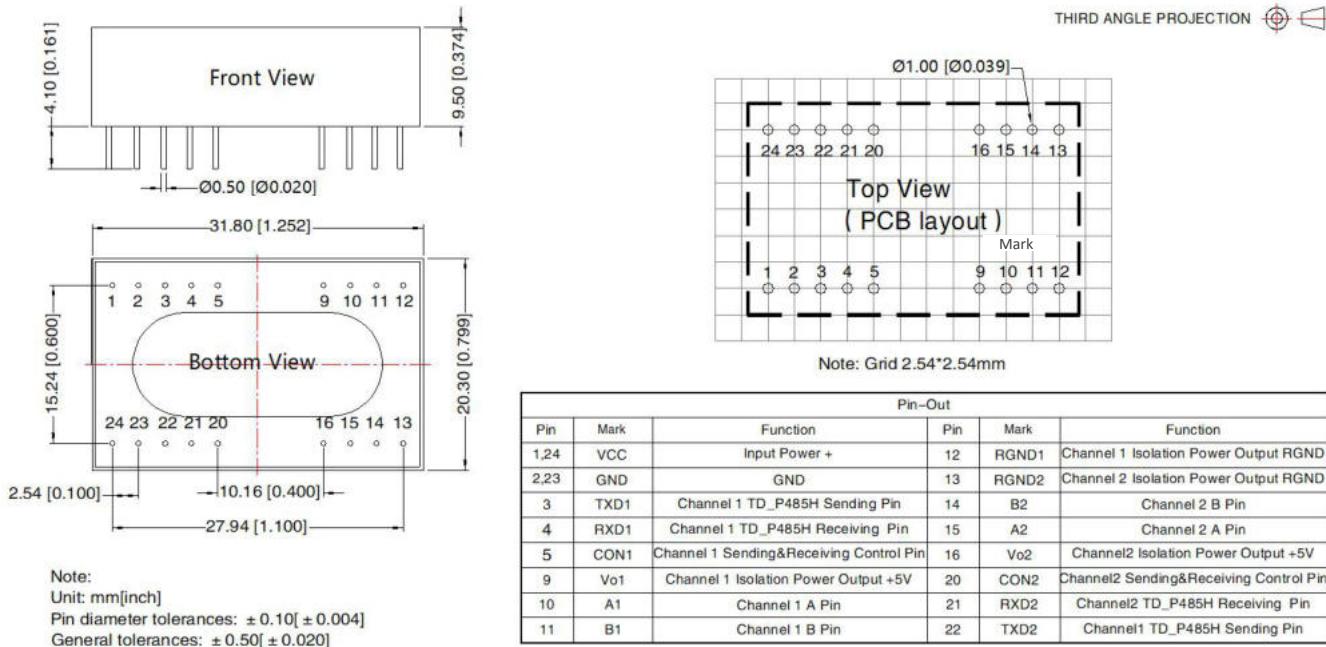

Notes:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. The Packaging bag number: 58210008;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on company corporate standards;
4. The above are the performance indicators of the product models listed in this datasheet. Some indicators of non-standard models will exceed the above requirements. For details, please contact our technical staff;
5. We can provide product customization service;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com