


Active high precision signal conditioning module
with a positive signal input and
with positive and negative signal output

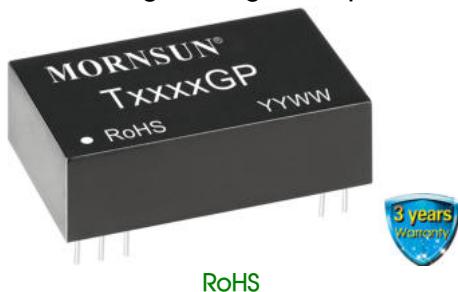

FEATURES

- Three-port isolation (signal input, signal output and power input terminals are all isolated from each other)
- High accuracy of 0.1% Full Scale
- Isolation test voltage 2.5kVDC (60s)
- Industrial grade operating temperature from -40°C to +85°C
- Low ripple & noise 30mVp-p(Typ.)
- ESD protection to IEC/EN61000-4-2, Contact $\pm 4kV$ with performance Criteria B

TxxxxGP series signal conditioning modules (also called isolated transmitter), are analog signal conversion modules, consisting of a positive signal input with positive and negative signal output. The electromagnetism isolation technology of the product ensures that input/output/power supply path are all isolated from each other, meaning these products can completely replace traditional linear optocoupler isolators, providing much higher accuracy and extremely low temperature drift in comparison to optocouplers. The TxxxxGP series are widely used in PLC, DCS, MCU and other isolated signal conversion applications.

Selection Guide

PART NO.	Power Supply input Typ. (VDC)	Input Signal	Output Signal	Isolation Power Output (VDC)
T6530GP	24V	0-5V	-10V to +10V	None

Notes: Customization of products is available on request.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Power Input	Input voltage		Typ.-5%		Typ.	Typ.+5% VDC
	Input power		Isolated signal power at full load		--	-- 2.0 W
	Power supply protection		Input reverse polarity protection			
Signal Input	Input signal		See selection guide			
	Input impedance		In case of max. input of voltage signal		10	-- $M\Omega$
	Over range				--	-- 15 V

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Signal Output	Output signal		See selection guide			
	Load capacity		In case of max. input of voltage signal		2	-- $k\Omega$
	Ripple & Noise		20MHz Bandwidth		--	30 mVp-p

Transmission Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Signal Precision	Ta=25°C		-0.1%FS	--	+0.1%FS	--
Power Regulation	Power supply input Typ. $\pm 5\%$		-0.05%FS	--	+0.05%FS	--
Load Regulation	Change from no-load to full load		-0.05%FS	--	+0.05%FS	--
Temperature Coefficient	Operating temperature range of -40 to +85°C		--	--	100	PPM/°C
Band Width			2	--	--	kHz
Response Time			--	--	5	ms

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Electric Isolation					signal input, signal output and power input terminals are all isolated from each other
Isolation Test	Electric strength test for 1 minute with a leakage current <1mA, humidity <70%	2.5	--	--	kVDC
Insulation Resistance	500VDC	100	--	--	MΩ
Operating Temperature		-40	--	+85	℃
Transportation and Storage Temperature		-40	--	+85	℃
Application Environment		The presence of dust and corrosive gas may cause damage to the product			

Mechanical Specifications

Case Material	Black plastic, flame-retardant and heat-resistant
Package	DIP24
Weight	11.5g (Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Immunity	ESD	IEC/EN61000-4-2	Contact $\pm 4kV$	perf. Criteria B
	EFT	IEC/EN61000-4-4	Power supply port $\pm 2kV$ (see Fig. 2 for recommended circuit)	perf. Criteria B
		IEC/EN61000-4-4	Other ports $\pm 1kV$ (see Fig. 2 for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5	Power supply port $\pm 1kV$ (line to line) (see Fig. 2 for recommended circuit)	perf. Criteria B
		IEC/EN61000-4-5	Other ports $\pm 1kV$ (line to ground) (see Fig. 2 for recommended circuit)	perf. Criteria B

Application Precautions

1. Carefully read and follow the instructions before use; contact our technical support if you have any question;
2. Do not use the product in hazardous areas;
3. use only DC power supply source for this product. 220VAC power supply is prohibited;
4. It is strictly forbidden to disassemble the product privately in order to avoid product failure or malfunction.

After-sales service

1. Factory inspection and quality control are strictly enforced before shipping any product; please contact your local representative or our technical support if you experience any abnormal operation or possible failure of the module;
2. The products have a 3-year warranty period, from the date of shipment. The product will be repaired or exchanged free of charge within the warranty period for any quality problem that occurs under normal use.

Applied circuit

Please refer to Isolated Transmitter application notes.

Design Reference

1. Wiring diagram for product application

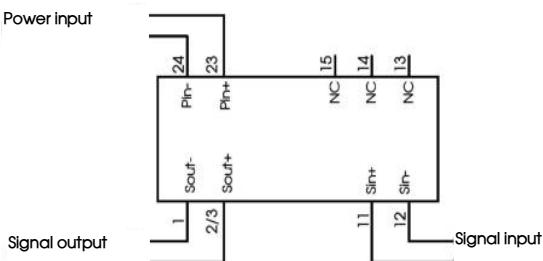


Fig. 1

2. EMC compliance recommended circuit


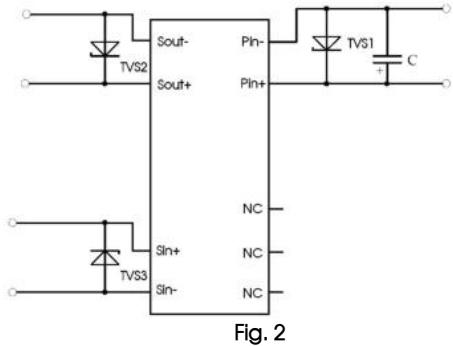


Fig. 2

Component	Recommended part
TVS1	SMCJ30A
TVS2	SMBJ15A
TVS3	SMBJ15A
C	220uF/35V

3. For more information please find the application notes on www.mornsun-power.com

Dimensions and Recommended Layout

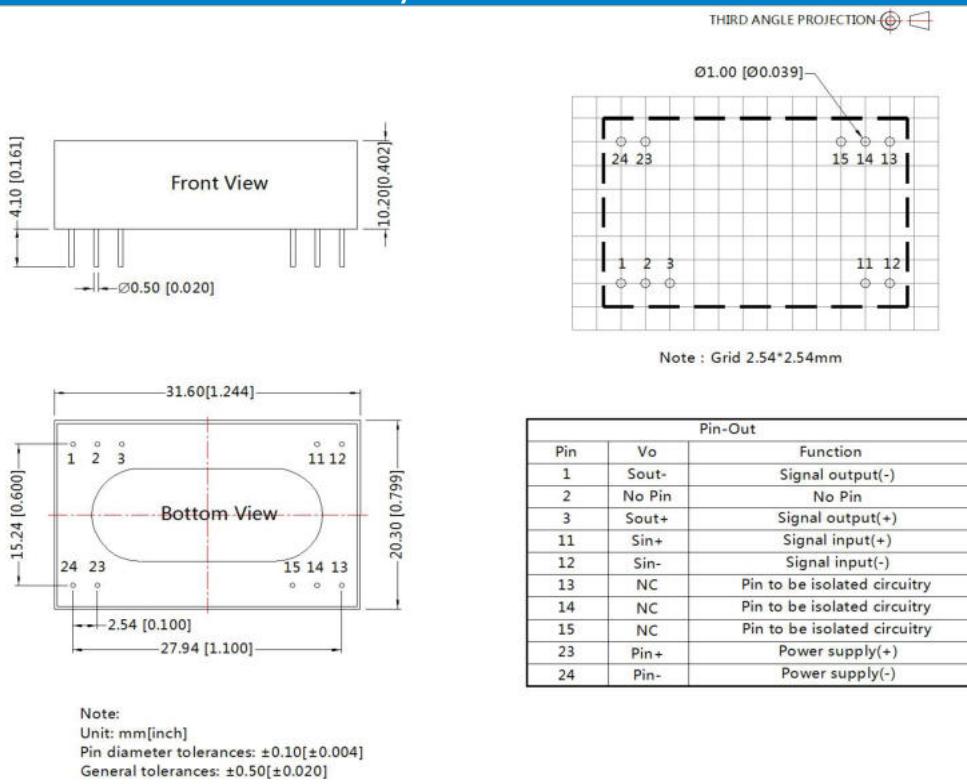

Notes:

- For additional information on Product Packaging please refer to www.mornsun-power.com. The Packaging bag number: 58210008;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on company corporate standards;
- The above are the performance indicators of the product models listed in this datasheet. Some indicators of non-standard models will exceed the above requirements. For details, please contact our technical staff;
- We can provide product customization service;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn