



RS 232 Repeater KFD2-FF-Ex2.RS232


- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- RS 232 input/output



Function

This isolated barrier is used for intrinsic safety applications. It is a repeater for the bi-directional transfer of RS 232 signals. The input and output circuits are intrinsically safe and designed to transmit and receive RS 232 signals between the safe area and the hazardous area. This barrier accepts input signals in the $\pm 3 \text{ V} \dots \pm 15 \text{ V}$ range providing a nominal $\pm 10 \text{ V}$ output that is independent of the input voltage. The maximum rate of data exchange is 20 kBits per second.

Connection

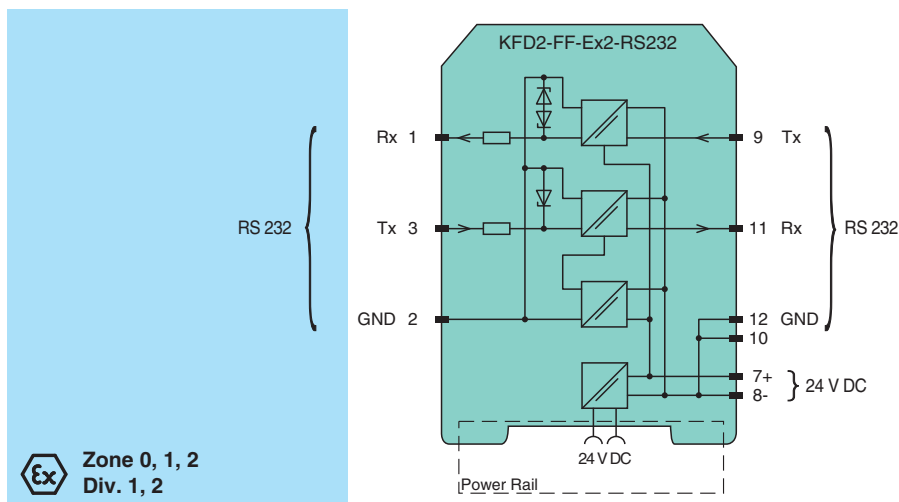

Technical Data

General specifications

Signal type		Analog input
Supply		
Connection		Power Rail or terminals 7+, 8-
Rated voltage	U _r	19 ... 30 V DC
Rated current	I _r	approx. 40 mA
Power consumption		approx. 1.5 W
Control circuit		
Interface		RS 232
Input		
Connection		terminal 9

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data


Signal		logic 0: +3 ... +15 V logic 1: -3 ... -15 V
Output		
Connection		terminal 11
Signal		logic 0: +9 ... +12 V logic 1: -9 ... -12 V
Field circuit		
Interface		RS 232
Input		
Connection		terminals 2, 3
Signal		logic 0: +3 ... +15 V logic 1: -3 ... -15 V
Output		
Connection		terminals 1, 2
Signal		logic 0: +9 ... +12 V logic 1: -9 ... -12 V
Short-circuit current		max. 40 mA per channel
Indicators/settings		
Display elements		LED
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Degree of protection		IEC 60529
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 110 g
Dimensions		20 x 107 x 115 mm (0.8 x 4.2 x 4.5 inch) (W x H x D) , housing type B1
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
EU-type examination certificate		BAS 02 ATEX 0116
Marking		Ⓔ II (1)G [Ex ia Ga] IIC , Ⓔ II (1)D [Ex ia Da] IIIC , Ⓔ I (M1) [Ex ia Ma] I (-40 °C ≤ T _{amb} ≤ 60 °C)
Equipment		terminals 1, 2, 3
Input		[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I
Voltage	U _o	19.9 V
Current	I _o	75 mA
Power	P _o	0.2 W
Internal capacitance	C _i	0 F
Internal inductance	L _i	0 H
Supply		
Maximum safe voltage	U _m	250 V _{rms} on terminals 7, 9 and 11; 0 V on terminals 8, 10 and 12 and on Power Rail connector (Attention! The rated voltage can be lower.)
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013 , EN 60079-11:2012
International approvals		
UL approval		
Control drawing		116-0173 (cULus)
IECEX approval		
IECEX certificate		IECEX BAS 05.0001
IECEX marking		[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I

Release date: 2021-12-13 Date of issue: 2021-12-13 Filename: 116923_eng.pdf

Technical Data

General information		
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .	

Assembly

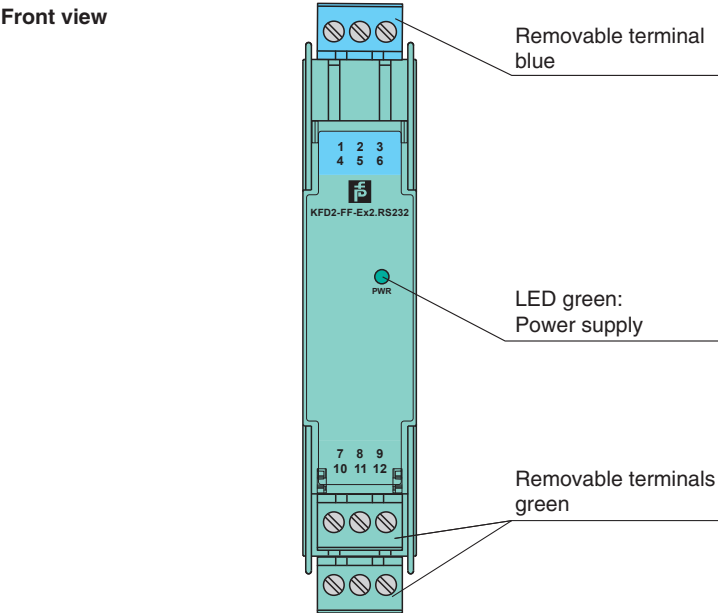

Matching System Components

	KFD2-EB2	Power Feed Module
	UPR-03	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	UPR-03-M	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	UPR-03-S	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m
	K-DUCT-BU	Profile rail, wiring comb field side, blue
	K-DUCT-BU-UPR-03	Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side, blue

Accessories

	KF-ST-5GN	Terminal block for KF modules, 3-pin screw terminal, green
	KF-ST-5BU	Terminal block for KF modules, 3-pin screw terminal, blue

Accessories

	KF-CP	Red coding pins, packaging unit: 20 x 6
---	-------	---

Release date: 2021-12-13 Date of issue: 2021-12-13 Filename: 116923_eng.pdf