




Thru-beam sensor LD28/LV28-F1/47/73c/76a



- Universal series with highly versatile fields of use
- Resistant against noise: reliable operation under all conditions
- Highly visible LED as alignment aid in receiver optics
- Emitter with test input
- Version with red light


Universal thru-beam sensor, large housing design, 30 m detection range, red light, 25 kHz transmission frequency, light/dark on, DC version, 2 PNP outputs, test input, M12 plug



Dimensions

Transmitter

Receiver

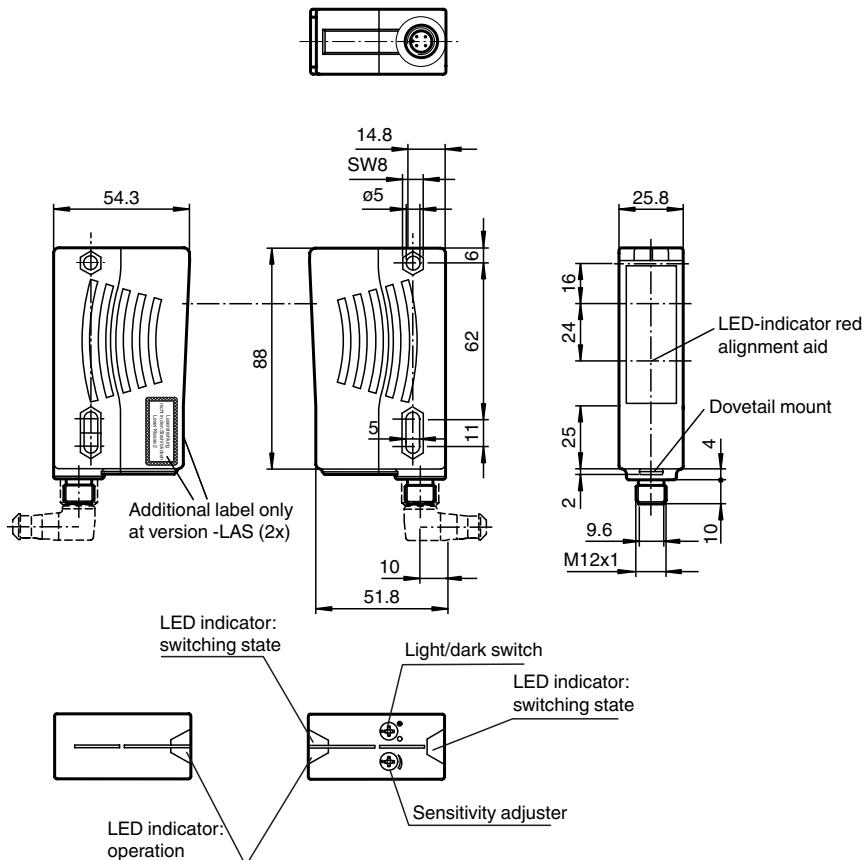

Technical Data

System components

Emitter

LD28-F1/73C/76A


Technical Data

Receiver	LV28-F1/47/73c	
General specifications		
Effective detection range	0 ... 30 m	
Threshold detection range	40 m	
Light source	LED	
Light type	modulated visible red light , 660 nm	
Alignment aid	LED red (in receiver lens) illuminated constantly: beam is interrupted, flashes: reaching switching point, off: sufficient stability control	
Transmitter frequency	F1 = 25 kHz	
Diameter of the light spot	approx. 0.6 m at 30 m	
Angle of divergence	Emitter 1.2°, Receiver 5°	
Ambient light limit	50000 Lux	
Functional safety related parameters		
MTTF _d	620 a	
Mission Time (T _M)	20 a	
Diagnostic Coverage (DC)	90 %	
Indicators/operating means		
Operation indicator	LED green	
Function indicator	LED yellow: 1. LED lit constantly: signal > 2 x switching point (function reserve) 2. LED flashes: signal between 1 x switching point and 2 x switching point 3. LED off: signal < switching point	
Control elements	sensitivity adjustment (Adjustment to < 25% of the effective operating range) , Light-on/dark-on changeover switch	
Electrical specifications		
Operating voltage	U _B	10 ... 30 V DC
Ripple		10 %
No-load supply current	I ₀	Emitter: ≤ 55 mA Receiver: ≤ 35 mA
Input		
Test input		emitter deactivation at +U _B (I _{max.} < 3 mA at 30 V DC)
Output		
Switching type		light/dark on, switchable
Signal output		2 PNP, complementary, short-circuit protected, reverse polarity protected , open collectors
Switching voltage		max. 30 V DC
Switching current		max. 200 mA
Switching frequency	f	1000 Hz
Response time		0.5 ms
Conformity		
Product standard		EN 60947-5-2
Approvals and certificates		
EAC conformity		TR CU 020/2011
Protection class		II, rated voltage ≤ 250 V AC with pollution degree 1-2 according to IEC 60664-1
UL approval		cULus Listed , Class 2 power source
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-40 ... 60 °C (-40 ... 140 °F)
Storage temperature		-40 ... 75 °C (-40 ... 167 °F)
Mechanical specifications		
Housing width		25.8 mm
Housing height		88 mm
Housing depth		54.3 mm
Degree of protection		IP67


Technical Data



Connection	Plastic connector M12 x 1, 4-pin
Material	
Housing	Plastic ABS
Optical face	Plastic pane
Mass	140 g (emitter and receiver)

Connection Assignment

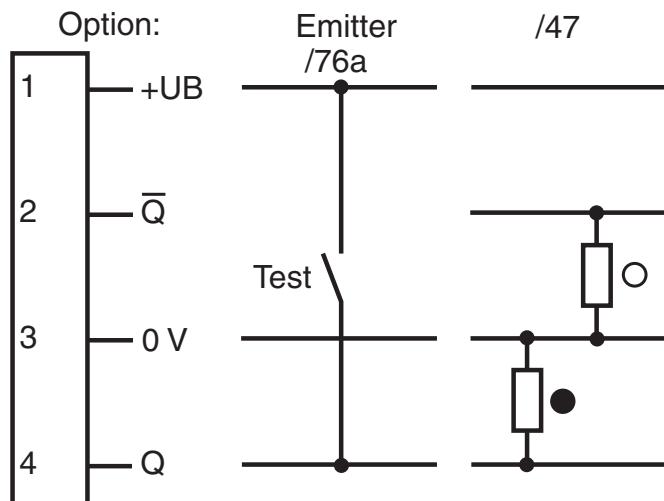

Characteristic Curve

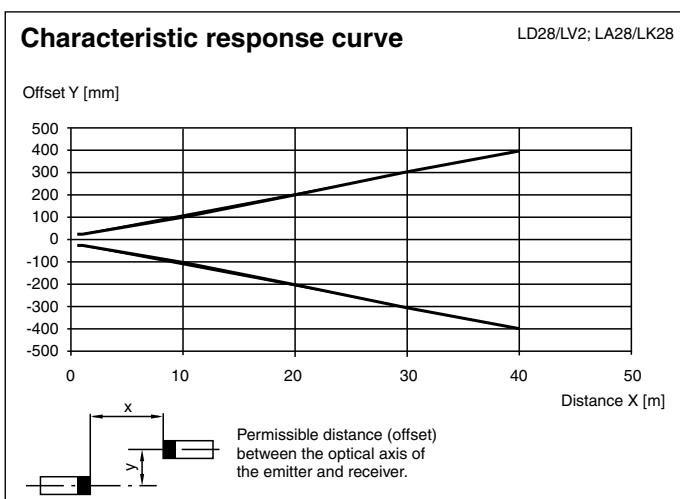

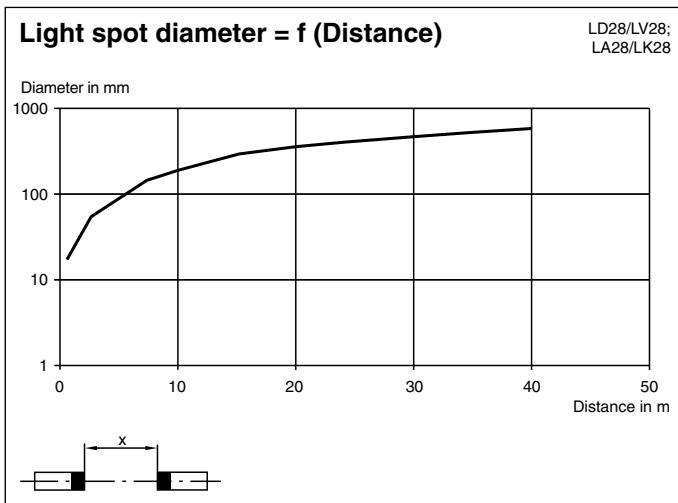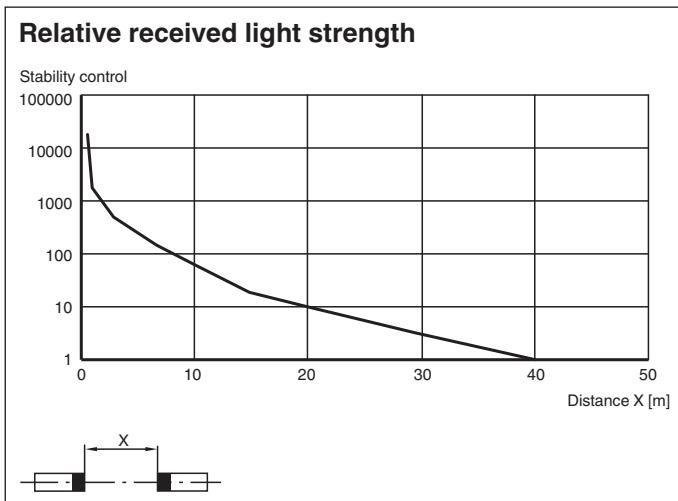

Accessories

	OMH-05	Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm
	OMH-21	Mounting bracket: mounting aid for sensors in the RL* series
	OMH-22	Mounting aid for RL* series
	OMH-RLK29-HW	Mounting bracket for rear wall mounting
	OMH-RL28-C	Weld slag cover model