




## Activator

### BT115B

- 3-position indication option with F31 series double sensor
- Upper and lower damping levels are continuously adjustable
- One fixed actuating lug
- 2 x two 90° offset, 90° adjustable actuating lugs
- Suitable for right and left rotating drives

#### Activator for F31 series

## Dimensions

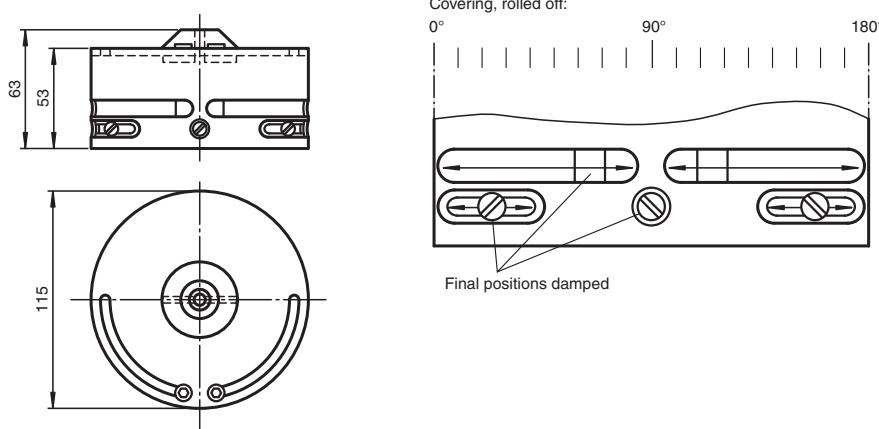

## Technical Data

### General specifications

|                    |             |
|--------------------|-------------|
| Ring diameter      | max. 105 mm |
| Spring ring height | max. 5 mm   |

### Ambient conditions

|                     |                                |
|---------------------|--------------------------------|
| Ambient temperature | -25 ... 70 °C (-13 ... 158 °F) |
|---------------------|--------------------------------|

### Mechanical specifications

|                       |  |
|-----------------------|--|
| Shaft diameter        | < 90 mm  |
| Shaft height          | 30 mm and 50 mm  |
| Mounting hole pattern | 30 x 130 mm  |
| Material              |  |
| Housing               | POM  |
| Spacer disk           | PA (2 units, 10 mm strong)   |
| Mounting screw        | for activator: 1.4305 / AISI 303 (1 piece M6 x 35)<br>for sensors - F31: 1.4305 / AISI 303 (4 pieces M5 x 16) (2 pieces M5 x 12) |
| Activation target     | Stainless steel 1.4305 / AISI 303 (integrated)   |