



# Ultrasonic sensor


## UB2000-30GM-H3-V1

- Separate evaluation
- Direct detection mode

Single head system



## Dimensions

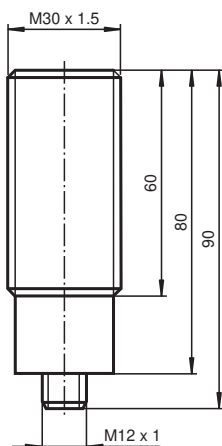

## Technical Data

### General specifications

Sensing range	80 ... 2000 mm
Adjustment range	120 ... 2000 mm
Dead band	0 ... 80 mm <sup>1)</sup>
Standard target plate	100 mm x 100 mm
Transducer frequency	approx. 180 kHz

### Electrical specifications

Operating voltage	$U_B$	10 ... 30 V DC , ripple 10 % <sub>SS</sub>
No-load supply current	$I_0$	≤ 30 mA

### Input

Release date: 2023-02-15 Date of issue: 2023-02-15 Filename: 130473\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com


**PEPPERL+FUCHS**

## Technical Data

Input type		1 pulse input for transmitter pulse (clock) 0-level (active): $< 5 \text{ V}$ ( $U_B > 15 \text{ V}$ ) 1-level (inactive): $> 10 \text{ V} \dots +U_B$ ( $U_B > 15 \text{ V}$ ) 0-level (active): $< 1/3 U_B$ ( $10 \text{ V} < U_B < 15 \text{ V}$ ) 1-level (inactive): $> 2/3 U_B \dots +U_B$ ( $10 \text{ V} < U_B < 15 \text{ V}$ )
Pulse length		20 ... 300 $\mu\text{s}$ (typ. 200 $\mu\text{s}$ ) <sup>2)</sup>
Pause length		$\geq 50 \times$ pulse length
Impedance		10 kOhm internal connected to $+U_B$
<b>Output</b>		
Output type		1 pulse output for echo run time, short-circuit proof open collector PNP with pulldown resistor = 22 kOhm level 0 (no echo): $-U_B$ level 1 (echo detected): $\geq (+U_B - 2 \text{ V})$
Rated operating current	$I_e$	15 mA , short-circuit/overload protected
Temperature influence		the echo propagation time: 0.17 % / K
<b>Compliance with standards and directives</b>		
Standard conformity		
Standards		EN IEC 60947-5-2:2020 IEC 60947-5-2:2019
<b>Approvals and certificates</b>		
UL approval		cULus Listed, General Purpose
CCC approval		CCC approval / marking not required for products rated $\leq 36 \text{ V}$
<b>Ambient conditions</b>		
Ambient temperature		-25 ... 85 °C (-13 ... 185 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
<b>Mechanical specifications</b>		
Connection type		Connector plug M12 x 1 , 4-pin
Housing diameter		30 mm
Degree of protection		IP67
Material		
Housing		nickel plated brass; plastic components: PBT
Transducer		epoxy resin/hollow glass sphere mixture; polyurethane foam
Mass		140 g

## Connection

Standard symbol/Connection:




2 = Emitter pulse input

4 = Echo propagation time output

Core colours in accordance with EN 60947-5-2.

## Connection Assignment




Connection Assignment

Wire colors in accordance with EN 60947-5-2






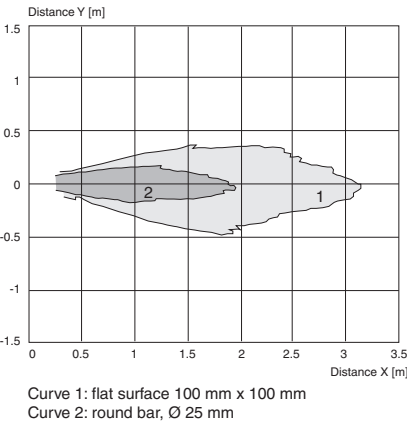

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

Characteristic Curve

Characteristic response curves



Accessories


	<b>BF 30</b>	Mounting flange, 30 mm
	<b>BF 30-F</b>	Plastic mounting adapter, 30 mm
	<b>BF 5-30</b>	Universal mounting bracket for cylindrical sensors with a diameter of 5 ... 30 mm
	<b>V1-G-2M-PVC</b>	Female cordset single-ended M12 straight A-coded, 4-pin, PVC cable grey
	<b>UVW90-M30</b>	Ultrasonic -deflector
	<b>UVW90-K30</b>	Ultrasonic -deflector
	<b>M30K-VE</b>	Plastic nuts with centering ring for the vibration-free mounting of cylindrical sensors

Release date: 2023-02-15 Date of issue: 2023-02-15 Filename: 130473\_eng.pdf


## Function Principle

The sensing range is determined in the downstream evaluation electronics such as PLC modules or other existing evaluation units.

The object distance in pulse-echo mode is obtained from the echo time  $\Delta t$ . The emission of an ultrasonic pulse starts simultaneously with the falling slope of the clock input signal.



We recommend the usage of a npn-transistor to trigger the sensors clock input. The sensors clock input is connected to the  $+U_B$  potential internally by means of a pull up resistor.

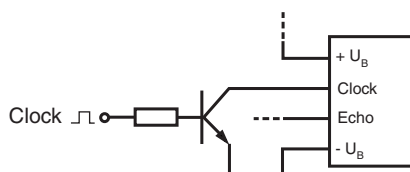

- 1) The unusable area (blind range) BR depends on the pulse duration  $T_i$ .  
The unusable area reaches a minimum with the shortest pulse duration.
- 2) The sensors detection range depends on the pulse duration  $T_i$ .  
With pulse duration < typical pulse duration, the sensors detection range may be reduced.

## Installation Conditions

If the sensor is installed in places where the operating temperature can fall below  $0^\circ\text{C}$ , the BF30, BF30-F or BF 5-30 fixing clamp must be used.