



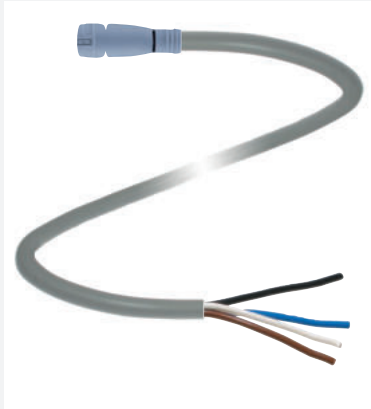

Female cordset ML29 Kupplungsdose 3m 4polig

- Special snap-in connector for ML29 series

Female cordset with 3 m cable for ML29 series sensors

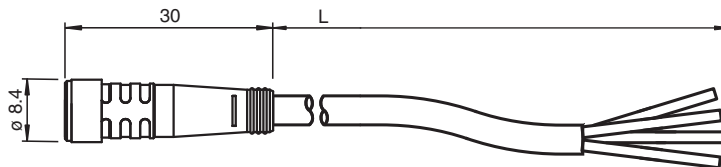

Technical Data

General specifications

Number of pins	4
Connection 1	socket
Construction type 1	straight
Threading 1	M8
Connection 2	cable end

Electrical specifications

Operating voltage	U_B	max. ... 30 V
Operating current	I_B	max. 4 A

Ambient conditions

Ambient temperature	-30 ... 90 °C (-22 ... 194 °F)
Pollution degree	3

Mechanical specifications

Degree of protection	IP67 according to EN 60529 (when properly seated)
Material	
Body	TPU, blue
Cable	PVC
Cable	
Sheath diameter	Ø 3.5 mm

Release date: 2024-03-26 Date of issue: 2024-03-26 Filename: 131596_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data

Color	grey		
Cores			4 x 0.14 mm ²
Length	L		3 m

Connection Assignment



- 1) BN
- 2) WH
- 3) BU
- 4) BK

Release date: 2024-03-26 Date of issue: 2024-03-26 Filename: 131596_eng.pdf