

Terminal cable

ICZ-2T/TR-0,2M-PUR ABG-V15B-G




- Labelling cover
- Screen put on the coupling nut and Pin 5
- Data transmission up to 12 MBaud

Terminal cable for PROFIBUS with terminal resistor



Dimensions

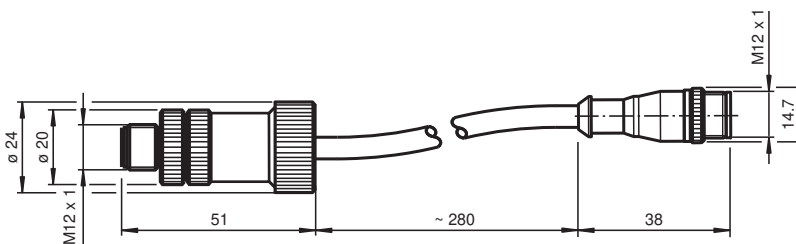

Technical Data

General specifications		
Number of pins		2 + 1 x screen
Transfer rate		max. 12 MBit/s
Directive conformity		
RoHS		
Directive 2011/65/EU (RoHS)		IEC/EN 63000
Ambient conditions		
Ambient temperature		-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications		
Degree of protection		IP65
Connection		4-pin M12 connector/socket, B-coded for PROFIBUS
Material		
Contacts		CuZn, gold-plated
Body		PUR / PA 66
Cable		PUR
Slotted nut		CuZn, nickel-plated
Cable		

Release date: 2022-05-19 Date of issue: 2022-05-19 Filename: 181499_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data

Sheath diameter	Ø 8 mm	
Color		violet
Cores	2 x 0.64 mm²	
Length	L	approx. 28 cm
Mass	approx. 90 g	

Connection

