

WCS2 profile rail WCS2-PS1-C

- Powder coated
- Rapid installation
- Holds both, laminate and stainless steel code rails
- Long suspension distance
- All mounting orientations are possible
- Required, if guide trolleys are used

WCS2 profile rail, coated

Function

A special aluminum profile system has been developed for quick installation of the WCS guide trolley and plastic laminate or stainless steel WCS code rails. The aluminum profile rail is designed for WCS2 and WCS3 Outdoor guide trollys and code rails. The guide trolley ensures optimal positioning of the read head in relation to the code rail and compensates for tolerances between the vehicle and the WCS system. It also isolates the read head from vehicle vibration. The aluminum profile system can be installed in any position. The profile rails are saw to a 45° miter at the ends. The aluminum profile rails is also available powder-coated (-C) and can be supplied in curved sections on request.

Grounding the aluminum profile


25.6

Any aluminum profile track assembly must include a low-resistance connection to the system ground. If the profile track's length exceeds 40 m (131 ft), it must be grounded twice at the beginning and end points.

Note

For more information, see mechanical manual.

Dimensions

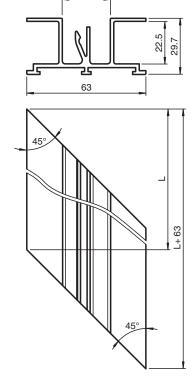

Technical Data Ambient conditions Operating temperature -40 ... 70 °C (-40 ... 158 °F) Mechanical specifications Length 1000 mm ... 5000 mm Bending radius \geq 1000 mm Material Aluminum, powder coated Thermal expansion coefficient 2.4 x 10⁻⁵ / K Mass 1000 g/m powder coated , 100 μm Coating