

## Model number

**WCS3-CS70-L0**

Code rail, polyester laminate


## Features

- Flexible installation by means of alu profile- or mounting bracket system
- High chemical resistance
- Low weight
- Without fixation holes

### Note

laminate version

## Dimensions

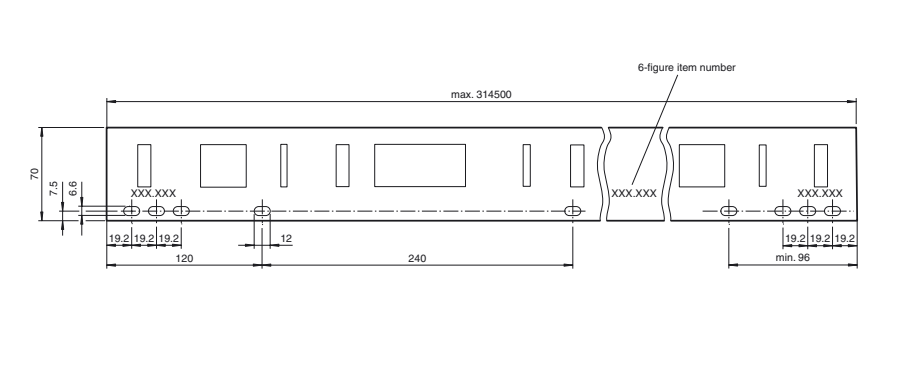

## Technical data

| General specifications |             |
|------------------------|-------------|
| Length                 | 0.1–314.5 m |

|                |                 |
|----------------|-----------------|
| Length         | 0.1 ... 314.3 m |
| Radius of bend | ≥ 300 mm        |

|                           |                            |
|---------------------------|----------------------------|
| <b>Ambient conditions</b> |                            |
| Operating temperature     | 40 – 60 °C ( 104 – 140 °F) |

|                          |                                |
|--------------------------|--------------------------------|
| Operating temperature    | -40 ... 60 °C (-40 ... 140 °F) |
| Storage temperature      | -40 ... 60 °C (-40 ... 140 °F) |
| Installation temperature | 10 ... 60 °C (50 ... 140 °F)   |

| Mechanical specifications |      |         |
|---------------------------|------|---------|
| Material thickness        | 0.75 | 0.95 mm |

|                               |                                  |
|-------------------------------|----------------------------------|
| Material thickness            | 0.75 ... 0.95 mm                 |
| Tension loading               | ≤ 260 N                          |
| Material                      | polyester laminate               |
| Thermal expansion coefficient | approx. $2.8 \times 10^{-5}$ / K |
| Mass                          | 40 g / m                         |
| Manufacturing tolerance       | ± 1 mm/m                         |

|                            |                                      |
|----------------------------|--------------------------------------|
| <b>General information</b> |                                      |
| Ordering information       | WCS2 CS70 L0; without mounting holes |

Ordering information  
WCS3-CS70-L0: without mounting holes  
WCS3-CS70-L1: with standard mounting holes  
WCS3-CS70-L2: with Vahle VKS mounting holes